



U.S. Department  
of Homeland Security  
**United States  
Coast Guard**

---

## LOCAL NOTICE TO MARINERS

**District: 7**

**Week: 25/16**

LITTLE RIVER, SOUTH CAROLINA TO ECONFINA RIVER, FLORIDA (INCLUDES PUERTO RICO AND THE U.S. VIRGIN ISLANDS)

Commander, Seventh Coast Guard District (dpw)  
Brickell Plaza Federal Building  
909 SE 1st Avenue, Room 406  
Miami, Florida 33131-3028  
Telephone (305) 415-6750  
Fax (305) 415-6757

Proposed Changes Comments: D07-SMB-DPWPublicComments@uscg.mil

Report any Aids to Navigation discrepancies, shoaling, hazard to navigation and bridge discrepancies including lighting to the nearest Coast Guard unit. After business hours, emergencies or holidays contact one of the 24 hour Command Centers listed below:

DISTRICT 7 (305) 415-6800  
SECTOR CHARLESTON (843) 740-7050  
SECTOR JACKSONVILLE (904) 741-7557  
SECTOR MIAMI (305) 535-4472  
SECTOR KEY WEST (305) 292-8727  
SECTOR ST PETERSBURG (727) 824-7506  
SECTOR SAN JUAN (787) 729-2041

### BROADCAST NOTICE TO MARINERS

Navigation information having been of immediate concern to the Mariner, and promulgated by the following broadcasts, has been incorporated in this notice when still effective:

- CCGD7 (D7) BNM 233-16 to 243-16
- SECTOR CHARLESTON (CHA) BNM 142-16 to 158-16
- SECTOR JACKSONVILLE (JAX) BNM 148-16 to 152-16
- SECTOR MIAMI (MIA) BNM 131-16 to 138-16
- SECTOR KEY WEST (KWT) BNM 039-16 to 040-16
- SECTOR ST PETERSBURG (STP) BNM 693-16 to 719-16
- SECTOR SAN JUAN (SJN) BNM 110-16 to 112-16

### NOTES:

- (1) Unless otherwise indicated, missing and destroyed structures are presumed to be in the immediate vicinity of assigned position, mariners should proceed with caution
- (2) The Local Notice to Mariners is updated each Tuesday on the U.S. Coast Guard Navigation Center website at <http://www.navcen.uscg.gov/?pageName=lnmDistrict&region=7>
- (3) Inquiries or information regarding the Local Notice to Mariner: [Lee.Dragon@uscg.mil](mailto:Lee.Dragon@uscg.mil)
- (4) The U.S. Coast Pilot supplements navigational information shown on charts
- (5) The U.S. Coast Pilot corrections <http://www.nauticalcharts.noaa.gov/nsd/cpdownload.htm>
- (6) Bridge Public Notice <http://www.navcen.uscg.gov/?pageName=pnBridges>

Online 2016 Light List <http://www.navcen.uscg.gov/index.php?pageName=lightLists>

Full updates to electronic editions of these volumes <http://www.navcen.uscg.gov/?pageName=lightListWeeklyUpdates>

Guidance for use of electronic navigation publications onboard U.S. vessels can be found at:

[http://www.uscg.mil/hq/cgcv/cvc/policy/policy\\_letters/543/CG-543\\_pol10-05.pdf](http://www.uscg.mil/hq/cgcv/cvc/policy/policy_letters/543/CG-543_pol10-05.pdf)

NTM Special Notice Section: [http://msi.nga.mil/MSISiteContent/StaticFiles/NAV\\_PUBS/UNTM/201601/Special\\_Notice.pdf](http://msi.nga.mil/MSISiteContent/StaticFiles/NAV_PUBS/UNTM/201601/Special_Notice.pdf)

The United States Coast Guard Navigation Information Service (NIS), operated by the USCG Navigation Center, is staffed 24 hours a day, 7 days a week. The NIS provides information on the current operational status, effective policies, and general information for GPS and DGPS. The NIS also disseminates Safety Broadcasts (BNM), Local Notice to Mariners (LNM), and the latest Notice Advisory to Navstar Users (NANU). NANU notices can be obtained via email subscription through the USCG Navigation Center <http://cgls.uscg.mil/mailman/listinfo/nanu> in addition; the NIS investigates all reports of degradation or loss of GPS, DGPS or AIS service. Users are encouraged to report all degradation or loss of radio navigation services to the NIS via any of the following: (703) 313-5900, email: [tis-sg-nisws@uscg.mil](mailto:tis-sg-nisws@uscg.mil) or <http://www.navcen.uscg.gov>

---

---

## ABBREVIATIONS

---

### A through H

ADRIFT - Buoy Adrift  
AICW - Atlantic Intracoastal Waterway  
AI - Alternating  
B - Buoy  
BKW - Breakwater  
bl - Blast  
BNM - Broadcast Notice to Mariner  
bu - Blue  
C - Canadian  
CHAN - Channel  
CGD - Coast Guard District  
C/O - Cut Off  
CONT - Contour  
CRK - Creek  
CONST - Construction  
DAYMK/Daymk - Daymark  
DBN/Dbn - Daybeacon  
DBD/DAYBD - Dayboard  
DEFAC - Defaced  
DEST - Destroyed  
DISCON - Discontinued  
DMGD/DAMGD - Damaged  
ec - eclipse  
EST - Established Aid  
ev - every  
EVAL - Evaluation  
EXT - Extinguished  
F - Fixed  
fl - flash  
FI - Flashing  
G - Green  
GIWW - Gulf Intracoastal Waterway  
HAZ - Hazard to Navigation  
HBR - Harbor  
HOR - Horizontal Clearance  
HT - Height

### I through O

I - Interrupted  
ICW - Intracoastal Waterway  
IMCH - Improper Characteristic  
INL - Inlet  
INOP - Not Operating  
INT - Intensity  
ISL - Islet  
Iso - Isophase  
kHz - Kilohertz  
LAT - Latitude  
LB - Lighted Buoy  
LBB - Lighted Bell Buoy  
LHB - Lighted Horn Buoy  
LGB - Lighted Gong Buoy  
LONG - Longitude  
LNM - Local Notice to Mariners  
LT - Light  
LT CONT - Light Continuous  
LTR - Letter  
LWB - Lighted Whistle Buoy  
LWP - Left Watching Properly  
MHz - Megahertz  
MISS/MSNG - Missing  
Mo - Morse Code  
MRASS - Marine Radio Activated Sound Signal  
MSLD - Misleading  
N/C - Not Charted  
NGA - National Geospatial-Intelligence Agency  
NO/NUM - Number  
NOS - National Ocean Service  
NW - Notice Writer  
OBSCU - Obscured  
OBST - Obstruction  
OBSTR - Obstruction  
Oc - Occulting  
ODAS - Anchored Oceanographic Data Buoy

### P through Z

PRIV - Private Aid  
Q - Quick  
R - Red  
RACON - Radar Transponder Beacon  
Ra ref - Radar reflector  
RBN - Radio Beacon  
REBUILT - Aid Rebuilt  
RECOVERED - Aid Recovered  
RED - Red Buoy  
REFL - Reflective  
RRL - Range Rear Light  
RELIGHTED - Aid Relit  
RELOC - Relocated  
RESET ON STATION - Aid Reset on Station  
RFL - Range Front Light  
RIV - River  
RRASS - Remote Radio Activated Sound Signal  
s - seconds  
SEC - Section  
SHL - Shoaling  
si - silent  
SIG - Signal  
SND - Sound  
SPM - Single Point Mooring Buoy  
SS - Sound Signal  
STA - Station  
STRUCT - Structure  
St M - Statute Mile  
TEMP - Temporary Aid Change  
TMK - Topmark  
TRLB - Temporarily Replaced by Lighted Buoy  
TRLT - Temporarily Replaced by Light  
TRUB - Temporarily Replaced by Unlighted Buoy  
USACE - Army Corps of Engineers  
W - White  
Y - Yellow

Additional Abbreviations Specific to this LNM Edition: None

---

---

## SECTION I - SPECIAL NOTICES

This section contains information of special concern to the Mariner.

---

### **HURRICANE INFORMATION:**

The hurricane season extends from June 1st through November 30th. Hurricanes can cause excessive damage to vessels and loss of life. To minimize these dangers, the following precautions should be taken by all mariners before getting underway during the hurricane season:

- (a) Instruction of crew and passengers in location of emergency equipment and emergency procedures;
- (b) Pre-sailing check of vessel, machinery, and equipment for seaworthiness;
- (c) Installation of strong ground tackle;
- (d) Review of storm center evasion procedures;
- (e) Knowledge of nearest hurricane shelter or port; and
- (f) Constant radio watches on channel 16 VHF-FM and frequent monitoring of weather broadcasts.

The civilian hurricane warning service for the North Atlantic is provided by the National Hurricane Center, Miami, Florida. The center collates ship, aircraft, radar, and satellite data to produce and issue tropical cyclone warnings and forecasts for the North Atlantic Ocean, including the Caribbean Sea and the Gulf of Mexico. A Tropical Cyclone Public Advisory (TCP) is issued every six hours, with intermediate bulletins provided as needed. For tropical storms and hurricanes threatening to cross the coast of the U.S., coastal warnings are issued to the public so that precautionary actions, including evacuation, can be initiated to minimize damage and loss of life.

Four alerts are issued:

(a) TROPICAL STORM WATCH – An announcement that sustained winds of 34 to 63 knots (39 to 73 mph or 63 to 118 km/hr) are possible within the specified area within 48 hours in association with a tropical, subtropical, or post-tropical cyclone.

(b) TROPICAL STORM WARNING – An announcement that sustained winds of 34 to 63 knots (39 to 73 mph or 63 to 118 km/hr) are expected somewhere within the specified area within 36 hours in association with a tropical, subtropical, or post-tropical cyclone.

(c) HURRICANE WATCH – An announcement that sustained winds of 64 knots (74 mph or 119 km/hr) or higher are possible within the specified area in association with a tropical, subtropical, or post-tropical cyclone. Because hurricane preparedness activities become difficult once winds reach tropical storm force, the hurricane watch is issued 48 hours in advance of the anticipated onset of tropical storm force winds.

(d) HURRICANE WARNING – An announcement that sustained winds of 64 knots (74 mph or 119 km/hr) or higher are expected somewhere within the specified area in association with a tropical, subtropical, or post-tropical cyclone. Because hurricane preparedness activities become difficult once winds reach tropical storm force, the warning is issued 36 hours in advance of the anticipated onset of tropical-storm-force winds. The warning can remain in effect when dangerously high water or a combination of dangerously high water and waves continue, even though winds may be less than hurricane force.

Additional information of interest to mariners is included in the Tropical Cyclone Forecast/Advisory (TCM) and the Tropical Cyclone Surface Wind Speed Probabilities (PWS) products. The TCM provides current and forecast storm positions, intensities, and wind fields out to 120 hours. The PWS provides probabilities of sustained wind speeds equal to or exceeding 34-, 50-, and 64-kt wind speed thresholds for select coastal and offshore locations

LNM: 20/16

#### **HURRICANE INFORMATION CONTINUED:**

Mariners are reminded that aids to navigation, particularly lighted and unlighted buoys, may be moved from charted position, damaged, destroyed, extinguished, or otherwise deemed discrepant as a result of hurricanes and storms. Mariners should not rely solely upon the position or operation of an aid to navigation, but also employ such other methods of determining position as may be available. Port Hurricane Conditions are set up by the COTP and will change as the threat of severe weather increases, or as a storm approaches a specific COTP Area of Responsibility. For COTP-specific Port Hurricane Conditions, you should review information provided under the Port Directory tab of <http://homeport.uscg.mil>

Condition 4 – Hurricane Seasonal Alert. 01 June–30 November; port status: open.

Condition Whiskey – Sustained Gale Force winds associated with Tropical Cyclone activity are predicted within 72 hours; port status: open.

Condition X-Ray – Sustained Gale Force winds associated with Tropical Cyclone activity are predicted within 48 hours; port status: open.

Condition Yankee – Sustained Gale Force winds associated with Tropical Cyclone activity are predicted within 24 hours; port status: restricted; vessel/facility control measures in effect.

Condition Zulu – Sustained Gale Force winds associated with Tropical Cyclone activity are predicted within 12 hours; port status: closed to all vessel traffic and waterside activities except for activities approved by the COTP.

Drawbridges along the coast may deviate from normal operating procedures. Drawbridges are authorized to remain closed upon approach of Gale Force winds of 34 knots or greater. Extended closure periods may be authorized up to 8 hours prior to arrival of Gale Force winds to facilitate evacuation of land traffic. Due to the uncertainty of hurricane movements and bridge closures, mariners are urged to seek passage through drawbridges well in advance of the arrival of Gale Force winds.

LNM: 20/16

#### **USCG NATION-WIDE AUTOMATIC IDENTIFICATION SYSTEM (NAIS) NETWORK TESTING**

On August 10, 2015, the U.S. Coast Guard will begin AIS Application Specific Message (AIS-ASM) testing. The test transmissions will occur between 0001-2359Z, 7 days/week. The test messages can be identified by their Maritime Mobile Service (MMSI) number: 300669139 or 00366613 and by the words "USCG TEST" within the contents of the message. Mariners are requested to contact the USCG Navigation Center at 1-703-313-5900 or [TIS-PF-NISWS@uscg.mil](mailto:TIS-PF-NISWS@uscg.mil) with any questions, comments, or to report any safety and/or operational impacts caused by this testing.

Application Specific Messages to be tested include: messages 6, 8, 25, and 26, DAC=367, FI's=22, 29, 33, 35; AIS Safety Related Text (SRM) messages: 8 (DAC=001, FI=0) and 14. The messages will be of various lengths, using repetitions of the text "USCG TEST". For further information on AIS messages, DACs, and FI's visit <http://www.navcen.uscg.gov/?pageName=AIMessages>.

LNM: 31/15

#### **SOUTH CAROLINA - GARDEN CITY: NAIS GARDEN CITY TOWER OUTAGE**

AIS ATON in Winyah Bay and Little River Inlet may not be visible from all directions due to a malfunction in the Garden City Tower. Mariners are urged to exercise caution.

LNM: 25/16

**Coast Pilot 5-NEW EDITION**

PUBLICATION—National Oceanic Atmospheric Administration (NOAA)—U.S. Coast Pilot 5, Gulf of Mexico, Puerto Rico, and Virgin Islands, 44th Edition, 2016, has been issued and is ready for free download and weekly updates at <http://nauticalcharts.noaa.gov/nsd/cpdownload.htm>.

Only Print-on-Demand (POD) bound copies are available for purchase; see <http://www.nauticalcharts.noaa.gov/staff/charts.htm#POD>.

The 2016 Edition cancels the preceding 2015 Edition, and incorporates all previous corrections.

LNM: 21/16

**ATLANTIC OCEAN - GEORGIA - FLORIDA - JACKSONVILLE: U.S. NAVY EXERCISES HAZARDOUS TO SURFACE VESSELS**

The following areas will contain exercises hazardous to surface vessels in the Jax/Chasnoa during 20-26 JUN. Mariners are advised to avoid these areas:

DATE: 20-26 JUN TIME: 0000-2359 (LCL)

AREA BOUNDED BY AREA

30-45N2 80-56W9 GUNEX AREA

30-45N2 80-30W1 W-137L

30-34N0 80-30W1

30-34N0 80-57W0

30-36N2 80-57W0

30-45N2 80-30W0 W-138L

30-45N2 79-38W7

30-34N0 79-41W1

30-34N0 80-30W1

DATE: 20-26 JUN TIME: 0000-2359 (LCL)

AREA BOUNDED BY AREA

29-20N3 79-50W1 31J

29-20N3 79-40W0

29-10N2 79-40W0

29-10N2 79-50W1

DATE: 20-26 JUN TIME: 0000-2359 (LCL)

AREA BOUNDED BY AREA

30-00N3 81-00W9 27C

30-00N3 80-50W3

29-50N6 80-50W3

29-50N6 81-00W9

DATE: 22-23 JUN TIME: 0800-1800 (LCL)

AREA BOUNDED BY AREA

30-35N1 80-00W8 UNDET

30-35N1 79-15W2

30-07N0 79-08W4

29-30N4 79-30W9

29-39N3 80-05W3

30-15N9 80-10W9

LNM: 25/16

**ATLANTIC OCEAN – FLORIDA – CAPE CANAVERAL: EASTERN RANGE OP # A7085 ATLAS-V MUOS-5**

Eastern Range will conduct hazardous operations surface to unlimited within the following Launch Hazard Areas.

A: From 2836N 8036W

TO 2838N 8034W

TO 2835N 8008W

TO 2829N 7918W

TO 2826N 7906W

TO 2823N 7906W

TO 2823N 7917W  
TO 2828N 8012W  
TO 2828N 8018W  
TO 2832N 8033W  
TO 2833N 8035W to beginning

B: From 2820N 7817W  
TO 2816N 7745W  
TO 2813N 7745W  
TO 2817N 7817W to beginning

C: From 2702N 7000W  
TO 2650N 6839W  
TO 2641N 6839W  
TO 2656N 7000W to beginning

D: From 2150N 5011W  
TO 2107N 4807W  
TO 2059N 4807W  
TO 2145N 5015W to beginning

Hazard periods for primary backup launch day:  
Primary: 24 / 1430Z thru 24 / 1559Z Jun 16. T-0 is 1430Z.  
Backup: 25 / 1426Z thru 25 / 1555Z Jun 16. T-0 is 1426Z.

LNM: 24/16

**ATLANTIC OCEAN - FLORIDA - LAKE WORTH INLET: OFFSHORE TESTING AND DIVE OPS**

Lockheed Martin - Palm Beach in conjunction with the United States Navy will be conducting offshore operations from 04 JANUARY, 2016 through 31 JUNE, 2016 with a manned submersible vehicle. Offshore operations will occur between the hours of 0700 to 1900 daily, in an area from Lake Worth Inlet south for 6 miles and up to 5 miles offshore. The manned submersible will be escorted by two (2) Rhib's with flashing amber lights and can be reached on VHF channel 16 for any concerned traffic. Mariners are asked to use caution while transiting through the operational area and maintain a distance of 500 yards from the support vessels. Further information contact Donny Jones at (561) 262-3833. MANDATORY DIVE OPERATIONS WILL TAKE PLACE AROUND THE SUBMERISBLE VEHICLE. MARINERS ARE ADVISED TO STAY CLEAR OF THE RHIB BOATS, SUBMERSIBLE VEHICLE, DIVE FLAGS AND FLOAT BALLS BY 500 YARDS.

NE 26 45.138N, 80 00.170W  
NW 26 45.139N, 80 01.703W  
SE 26 43.262N, 80 00.170W  
SW 26 43.262N, 80 01.650W

LNM: 01/16

**ATLANTIC OCEAN - FLORIDA - PALM SHORES TO WEST PALM BEACH - LAKE WORTH INLET: U.S. NAVY OFFSHORE TESTING AND DIVE OPERATIONS (UPDATE: April 6, 2016)**

Lockheed Martin - Palm Beach in conjunction with General Dynamics Electric Boat Corporation, MOBRO Marine Tug Boat: LOU ANNA GUIDRY, along with a 150' MOBRO: 1700 Barge USCG Document #1136162 and Crane American 9353, will conduct off shore testing from 05 JANUARY, 2016 - 31 DECEMBER, 2016 with (1) Manned and piloted submersible vehicle. Testing will occur 24 hours daily 1-5 miles off shore from Lake Worth Inlet to the Breakers. A Lockheed Martin RHIB Boat and Tug Boat LOU ANNA will be supporting the Manned and piloted submersible Vehicle, with support from Sea Tow Palm Beach, and or Tow Boat U.S. who will supply (1) additional RHIB Boat to support with the manned Submersible vehicle, all support boats can be reached on VHF-Channel 16.

FLORIDA-AICW-PALM SHORES TO WEST PALM BEACH- LAKE WORTH INLET: Ref: LNM 15/16

The second operation will run up the Intracoastal Waterway from Peanut Island north under Blue Heron Bridge to Lake Worth North Daybeacon 29 (LLNR 46495) LAT/LONG, 26-49-22.607N/080-03-09.405W. Dive operations with the Submarine at the North Turning Basin Op area. Depth of area is 20 – 30 feet.

NW - N 26 47.787            W 80 02.742  
SW - N 26 47.798            W 80 02.721  
SE - N 26 47.722            W 80 02.715  
NE - N 2647.726            W 80 02.744

MANDATORY DIVE OPERATIONS WILL TAKE PLACE AROUND THE SUBMERISBLE VEHCILE. MARINERS ARE ADVISED TO STAY CLEAR OF THE RHIB BOATS, SUBMERSIBLE VEHICLE, DIVE FLAGS AND FLOAT BALLS BY 200 YARDS.

Chart 11472

LMN: 01/16

**ATLANTIC OCEAN – FLORIDA – LAKE WORTH INLET TO BOYTON BEACH: U.S. NAVY OFFSHORE TESTING AND DIVE OPERATIONS**

Lockheed Martin - Palm Beach in conjunction with the United States Navy will be conducting offshore testing of two unmanned, remotely piloted, Semi-submersible vehicles. The testing will range from 1-5 miles off shore from Lake Worth Inlet to Boynton Beach Inlet. Operations will take place beginning 05 JANUARY, 2016 and ending 31 DECEMBER, 2016. Hours of operations will mostly be during daylight hours but at various times throughout the year they will be operating during the evening hours. The Lockheed Martin RHIB Boats, Tow Boat U.S. , and Sea Tow Palm Beach RHIB Boats will support the semisubmersibles. In all operations, both RHIB boats will be in constant radio contact with the Operations crew, and will be equipped with a remote kill switch. The RHIB Boats will be monitoring VHF-FM Channel 16.

MARINERS ARE ADVISED TO STAY CLEAR OF THE RHIB BOATS, THE SEMI-SUBMERSIBLE VEHICLE AND DIVE OPERATIONS/DIVE FLAGS AND FLOAT BALLS BY 200 YARDS.

LMN: 01/16

**ATLANTIC OCEAN – FLORIDA – WEST PALM BEACH TO BOYNTON BEACH: SFOMF Submerged Object Recovery**

The R/V BASELINE EXPLORER operated by Brownies Global Logistics will be recovering submerged objects from the seafloor South and East of Port of Palm Beach inlet. The operations are scheduled during the time period from 27 June 0000Z to 07 July 2400Z 2016.

The R/V BASELINE EXPLORER will be recovering submerged objects between 90 FSW and 700 FSW. The objects are contained within the recovery area boundaries listed below. All vessels are requested to remain clear of the recovery vessel while recovery operations are in progress. All concerned traffic should contact the R/V Baseline Explorer on VHF 16.

Recovery Area Corners

26 41.001 N 080 01.990 W

26 41.001 N 079 58.005 W

26 33.015 N 080 01.990 W

26 33.015 N 079 58.005 W

LMN: 25/16

**ATLANTIC OCEAN – FLORIDA – PORT EVERGLADES: SFOMF Instrumentation Recovery & Deployment.**

The R/V BASELINE EXPLORER operated by Brownies Global Logistics will be recovering three seafloor instrumentation packages and the installing one seafloor instrumentation package South and East of Port Everglades inlet. The operations are scheduled during the time period from 06 July 0000Z to 15 July 2400Z 2016.

The R/V BASELINE EXPLORER will be recovering three seafloor instrumentation packages and the installing one seafloor installation package within 0.5 NM of the following coordinates:

26 05.215 N 80 03.899 W (Recovery – 400 FSW)

26 05.056 N 80 04.018 W (Recovery – 400 FSW)

26 04.032 N 80 03.877 W (Recovery – 520 FSW)

26 04.600 N 80 04.768 W (Installation – 200 FSW)

All vessels are requested to remain clear of the recovery vessel while recovery operations are in progress. All concerned traffic should contact the R/V Baseline Explorer on VHF 16. The installed instrumentation will be removed at a later date TBD. Once deployed, the instrumentation will remain on the seafloor until recovery. The overall size of each instrumentation package is not larger than 1.5 meters square.

LMN: 25/16

**WEST INDIES - PUERTO-RICO - VIEQUES: NORTHEAST FROM PLAYA ICACOS TO PUNTA ESTE, AND ON THE SOUTHEAST ON BAHIA DE SALINAS SUR.**

THE U. S. NAVY IS ADVISING ALL MARINERS TO REFRAIN FROM ENTERING THE FOLLOWING AREAS IN VIEQUES, PUERTO RICO: NORTHEAST FROM PLAYA ICACOS TO PUNTA ESTE, AND ON THE SOUTHEAST ON BAHIA DE SALINAS SUR. STAY AWAY FROM THIS DANGER ZONE AS IT CONTAINS UNEXPLODED ORDNANCE. FOR MORE INFORMATION, CONTACT MRS. MADELINE RIVERA AT (757) 286-6457 OR EMAIL: MADELINE.RIVERA@USCG.MIL. THE USCG MAY BE CONTACTED VIA VHF-FM16 OR 787-289-2041.

---



---

**SECTION II - DISCREPANCIES**

This section lists all reported and corrected discrepancies related to Aids to Navigation in this edition. A discrepancy is a change in the status of an aid to navigation that differs from what is published or charted.

---

**DISCREPANCIES (FEDERAL AIDS)**

LLNR	Aid Name	Status	Chart No.	BNM Ref.	LNM St	LNM End
200	Charleston Entrance Lighted Buoy C	RAC INOP	11528	077-16 CHA	15/16	
<b>565</b>	<b>Amelia Island Light</b>	<b>LT IMCH</b>	<b>11503</b>	<b>152-16 JAX</b>	<b>25/16</b>	
935	Pacific Reef Light	LT EXT	11451	074-13 MIA	09/13	
950	Elbow Reef Light 6	REDUCED INT/DAYMK MISSING/STRUCT DMGD/TRLT	11463	025-16 MIA	04/16	
960	Molasses Reef Light 10	REDUCED INT	11464	134-14 KWT	50/14	
995	Coffins Patch Light 20	LT EXT	11449	017-15 KWT	05/15	
1010	Looe Key Light 24	REDUCED INT	11445	062-15 KW	29/15	
1085	Halfmoon Shoal Light WR2	LT EXT/DAYMK MISSING/STRUCT DMGD	11439	032-16 KWT	20/16	
1375	Egmont Channel Range Front Light	REDUCED INT	11411	322-16 STP	11/16	
1565	St Martins Outer Shoal Light 10	DAYMK DMGD	11409	563-16 STP	20/16	
<b>1830</b>	<b>Murrells Inlet Daybeacon 19</b>	<b>STRUCT DEST</b>	<b>11534</b>	<b>154-16 CHA</b>	<b>25/16</b>	
2370	Charleston Entrance Lighted Buoy C	RAC INOP	11528	077-16 CHA	15/16	
<b>2505.5</b>	<b>Bennis Reach Range Front Light</b>	<b>LT EXT</b>	<b>11524</b>	<b>151-16 CHA</b>	<b>25/16</b>	
<b>3050</b>	<b>Cooper River Lighted Buoy 73</b>	<b>OFF STA</b>	<b>11524</b>	<b>146-16 CHA</b>	<b>25/16</b>	
4020	Egg Bank Buoy 8	MISSING	11517	115-16 CHA	21/16	
4400	Broad Creek Daybeacon 1	TRUB	11512	368-15 CHA	49/15	
4835	Lower Flats Range Rear Light	LT EXT/STRUCT DMGD	11507	110-16 CHA	20/16	
4850	Elba Island Light 39	TRLB	11507	293-15 CHA	40/15	
<b>4965</b>	<b>Elba Island Light 49</b>	<b>STRUCT DEST</b>	<b>11507</b>	<b>145-16 CHA</b>	<b>25/16</b>	
5025	City Front Channel Light 62	OFF STA/TRLB	11514	308-15 CHA	30/14	
5045	Kings Island Turning Basin Range Front Light	STRUCT DEST	11514	355-15 CHA	47/15	
5065	Kings Island Turning Basin Light 16	STRUCT DEST/HAZ NAV	11514		31/15	
5745	Ossabaw Sound North Channel Buoy 5	MISSING	11511	097-16 CHA	17/16	
5775	Ossabaw Sound South Channel Buoy 4	OFF STA	11511	116-16 CHA	22/16	
5820	St Catherines Sound Buoy 7	OFF STA	11511	133-16 CHA	23/16	
5970	Hampton River Daybeacon 11	HAZ NAV/STRUCT DMGD/TRLB	11507	322-15 CHA	44/15	
6015	Hampton River Daybeacon 23	HAZ NAV/STRUCT DMGD/TRLB	11507	323-15 CHA	44/15	
<b>6110</b>	<b>St Simons Sound Entrance Lighted Buoy 16</b>	<b>LT EXT</b>	<b>11489</b>	<b>148-16 CHA</b>	<b>25/16</b>	
<b>6145</b>	<b>St Simons Sound Lighted Buoy 20</b>	<b>LT EXT</b>	<b>11489</b>	<b>149-16 CHA</b>	<b>25/16</b>	
6445	Satilla River Light 6	STRUCT DEST/HAZ NAV/TRLB	11489	141-16 CHA	24/16	
6615	St Marys South Jetty Buoy B	OFF STA	11503	117-16 JAX	19/16	
6685	St Marys Daybeacon S	STRUCT DEST	11503	143-16 CHA	24/16	
7410	Blount Island Channel Light 1	TRLB	11491	130-16 JAX	22/16	
8370	Possum Bluff Light 40	LT EXT	11495	146-16 CHA	24/16	
8780	Lake George South End Range Rear Light	LT EXT	11495	19-16 JAX	18/16	
9150	Palmetto Reach Light 93	LT IMCH	11498	112-16 JAX	18/16	
9565	Ponce De Leon Inlet Light 11	STRUCT DEST/TRLB	11485	140-16 JAX	23/16	
<b>10165</b>	<b>St Lucie Inlet Daybeacon 16</b>	<b>LT EXT</b>	<b>11472</b>	<b>133-16 MIA</b>	<b>25/16</b>	
10213	Singer Island Channel Daybeacon 8	STRUCT DEST/HAZ NAV/TRLB	11472	118-16 MIA	22/16	
10255	Lake Worth Inlet Light 13	STRUCT DEST/HAZ NAV/TRLB	11472	060-16 MIA	11/16	

11130	Caesar Creek Daybeacon 30	STRUCT DEST/HAZ NAV/TRLB	11463	110-16 MIA	22/16
11800	Largo Sound Channel Daybeacon 7	STRUCT DEST/HAZ NAV/TRLB	11464	013-16 KWT	10/16
11890	Mosquito Bank Light 35	LT IMCH/REDUCED INT	11464		41/15
12065	Tavernier Creek Light	TRLT	11464	037-16 KWT	23/16
12450	Bamboo Key Light 13	LT EXT	11453	092-15 KWT	51/15
15580	Bird Key Harbor Daybeacon 3BK	HAZ NAV/DAYMK MISSING	11438	002-16 KWT	02/16
15995	Indian Key Pass Daybeacon 9	TRUB	11430	676-15 STP	25/15
16005	Indian Key Pass Daybeacon 11	TRUB	11430	681-15 STP	25/15
<b>16983</b>	<b>Capri Pass Daybeacon 8</b>	<b>TRUB</b>	<b>11430</b>	<b>696-16 STP</b>	<b>25/16</b>
17380	Big Marco Pass-Gordon Pass Daybeacon 55	TRUB	11430	532-16 STP	18/16
<b>17435</b>	<b>Big Marco Pass-Gordon Pass Daybeacon 71</b>	<b>STRUCT DEST</b>	<b>11430</b>		<b>25/16</b>
<b>17460</b>	<b>Gordon Pass Channel Light 3</b>	<b>STRUCT DEST</b>	<b>11430</b>	<b>702-16 STP</b>	<b>25/16</b>
18010	San Carlos Bay Channel Light 4	DAYMK DMGD	11427	602-16 STP	22/16
21155	Peace River Daybeacon 11	TRUB	11426	133-16 STP	05/16
21757	Longboat Pass Daybeacon 1	TRUB	11425	1103-14 STP	48/14
21758	Longboat Pass Daybeacon 2	TRUB	11425	499-14 STP	20/14
<b>21970</b>	<b>Manatee River Light 15</b>	<b>DAYMK MISSING</b>	<b>11415</b>	<b>709-16 STP</b>	<b>25/16</b>
22090	Manatee River Daybeacon 26	TRUB	11416	529-16 STP	18/16
22280	Egmont Channel Range Front Light	REDUCED INT	11411	322-16 STP	11/16
22355	Mullet Key Channel Range Front Light	TRUB	11415	1194-14 STP	51/14
22485	Tampa Bay Cut B Channel Inbound Range Rear Light	LT IMCH	11416	686-16 STP	24/16
23560	Sparkman Channel Light 5	TRLB	11416	742-13 STP	32/13
23595	Port Sutton Channel Light 3	TRLB	11416	289-16 STP	10/16
<b>23665</b>	<b>Tampa Bay Cut G Channel Range Front Light</b>	<b>LT EXT/STRUCT DMGD</b>	<b>11416</b>	<b>700-16 STP</b>	<b>25/16</b>
23725	Tampa Bay Cut J Channel Outbound Range Rear Light	HAZ NAV/STRUCT DMGD/TRLT	11416	579-16 STP	20/16
26090	Anclote Anchorage South Entrance Shoal Daybeacon	STRUCT DEST	11411	551-16 STP	19/16
26135	Anclote River Entrance Light 1	LT EXT/DAYMK DMGD	11411	667-16 STP	24/16
26240	Anclote River Daybeacon 21	TRUB	11411	436-16 STP	15/16
28775	Crystal River Entrance Light 1	STRUCT DEST/HAZ NAV/TRLB	11408	110-16 STP	04/16
<b>29440</b>	<b>Withlacoochee River Entrance Daybeacon 13</b>	<b>TRUB</b>	<b>11408</b>	<b>694-16 STP</b>	<b>25/16</b>
<b>29595</b>	<b>Withlacoochee River Entrance Daybeacon 36A</b>	<b>DAYMK DMGD</b>	<b>11408</b>	<b>687-16 STP</b>	<b>25/16</b>
29650	Withlacoochee River Daybeacon 46	TRUB	11408	831-14 STP	36/14
<b>30465</b>	<b>Steinhatchee River Light 5</b>	<b>REDUCED INT</b>	<b>11407</b>		<b>25/16</b>
30581	Steinhatchee River Daybeacon 50	TRLB/STRUCT DEST/HAZ NAV	11407	862-14 STP	37/14
30605	Keaton Beach Daybeacon 3	TRLB/STRUCT DEST/HAZ NAV	11407	502-15 STP	18/15
<b>30680</b>	<b>Keaton Beach Light 19</b>	<b>REDUCED INT</b>	<b>11407</b>		<b>25/16</b>
31160	Las Cucarachas Light	DAYMK MISSING	25667		19/16
31175	Las Croabas Daybeacon 3	TRLB	25667	071-15 SJN	22/15
31380	Bajos Chinchorro Del Sur Light	DAYMK MISSING	25664	082-16 SJN	18/16
32190	Bahia De Guanica Entrance Lighted Buoy 2	OFF STA	25671	104-16 SJN	22/16
33345	Southwest Cape Shoal Buoy 2	MISSING	25644	092-16 SJN	22/16
33390	Guantanamo Bay Entrance Lighted Buoy 2	LT EXT	26230	N/A	24/16
33395	St Nicolas Point Channel Lighted Buoy 3	LT EXT	26230	N/A	24/16
33410	St Nicolas Point Channel Lighted Buoy 6	OFF STA	26230	N/A	24/16
33415	St Nicolas Point Channel Light 7	TRLB	26230		01/16
33750	Little River-Winyah Bay Daybeacon 27	TRUB	11534	248-14 CHA	34/14
34355	Winyah Bay-Charleston Harbor Daybeacon 73	TRUB	11518	328-14 CHA	44/14

34510.5	Winyah Bay-Charleston Harbor Daybeacon 117A	TRUB	11518	028-16 CHA	06/16
34560	Winyah Bay-Charleston Harbor Range Front Light C	STRUCT DEST	11524	132-16 CHA	22/16
34630.5	Stono River Daybeacon 18	STRUCT DEST	11518	138-16 CHA	23/16
34845	Wadmalaw River Range A Rear Light	LT EXT/DAYMK MISSING/STRUCT DMGD	11518	094-16 CHA	17/16
34955	Dawho River Daybeacon 112	TRUB	11517	127-16 CHA	22/16
35485	Beaufort River Daybeacon 244	STRUCT DMGD	11516	099-16 CHA	17/16
35660	Skull Creek Daybeacon 10	TRUB	11507	217-15 CHA	31/15
35700	Skull Creek Daybeacon 20	TRUB	11507	365-15 CHA	49/15
35725	Jenkins Island Flat Daybeacon 27	TRUB	11507		34/15
35795	Calibogue Sound Light 31	TRLB	11507	242-15 CHA	33/15
<b>36085</b>	<b>Skidaway River Daybeacon 44A</b>	<b>STRUCT DEST</b>	<b>11507</b>	<b>147-16 CHA</b>	<b>25/16</b>
36475	North Newport River Light 116	LT EXT	11507	136-16 CHA	23/16
36550	Johnson Creek Daybeacon 130	DAYMK MISSING	11507	137-16 CHA	23/16
<b>36745</b>	<b>Old Teakettle Creek Light 162</b>	<b>STRUCT DMGD</b>	<b>11507</b>	<b>153-16 CHA</b>	<b>25/16</b>
36770	Old Teakettle Creek Daybeacon 168	TRUB	11507	069-16 CHA	13/16
<b>36775</b>	<b>Old Teakettle Creek Light 169</b>	<b>LT EXT</b>	<b>11507</b>	<b>152-16 CHA</b>	<b>25/16</b>
36795	Doboy Sound Light 178	OFF STA/TRLB	11507	124-16 CHA	21/16
36795	Doboy Sound Light 178	STRUCT DEST/HAZ NAV/REDUCED INT/TRLB	11507	105-16 CHA	19/16
<b>37255</b>	<b>St Simons Sound Lighted Buoy 20</b>	<b>LT EXT</b>	<b>11489</b>	<b>149-16 CHA</b>	<b>25/16</b>
<b>37340</b>	<b>Jekyll Creek Light 19</b>	<b>LT EXT</b>	<b>11489</b>	<b>155-16 JAX</b>	<b>25/16</b>
37535	Cumberland River Light 45A	HAZ NAV/TRLB	11489	036-16 JAX	08/16
37610	Cumberland River Light 60	TRLB	11489	089-16 CHA	16/16
37615	Cumberland River Light 60A	TRLB	11489	090-16 CHA	16/16
38635	Tolomato River Daybeacon 7	TRUB	11489	144-16 JAX	24/16
<b>39120</b>	<b>San Sebastian River Daybeacon 6</b>	<b>HAZ NAV/TRLB</b>	<b>11485</b>	<b>150-16 JAX</b>	<b>25/16</b>
39885	Halifax River Daybeacon 14	TRUB	11485	137-16 JAX	23/16
40665	New Smyrna Beach Light 33	LT EXT	11485	139-16 JAX	23/16
<b>40990</b>	<b>Mosquito Lagoon Light 21</b>	<b>LT EXT</b>	<b>11485</b>	<b>151-16 JAX</b>	<b>25/16</b>
41275	Indian River (North Section) Daybeacon 30	STRUCT DEST	11485	127-16 JAX	22/16
<b>41675</b>	<b>Canaveral Barge Canal Light 10</b>	<b>LT EXT</b>	<b>11478</b>	<b>149-16 JAX</b>	<b>25/16</b>
42500	Banana River Daybeacon 6B	TRUB	11472	056-16 JAX	10/16
42590	Banana River Daybeacon 24	TRUB	11481	186-14 JAX	27/14
<b>43860</b>	<b>Indian River (South Section) Light 96</b>	<b>HAZ NAV/TRLB</b>	<b>11472</b>	<b>136-16 MIA</b>	<b>25/16</b>
44475	Indian River (South Section) Light 148	LT EXT/TRLB	11472	063-16 MIA	11/16
<b>46530</b>	<b>Lake Park Marina Daybeacon 1</b>	<b>DAYMK DMGD</b>	<b>11472</b>	<b>137-16 MIA</b>	<b>25/16</b>
46880	Lake Worth South Daybeacon 14	TRUB	11472	119-16 MIA	22/16
48360	Biscayne Bay Daybeacon 41	TRUB	11467	123-16 MIA	22/16
48490	Biscayne Bay Daybeacon 57	TRUB	11468	099-16 MIA	19/16
50470	Baker Cut Daybeacon 58A	TRUB	11464	030-16 KWT	20/16
<b>50590</b>	<b>Ramshorn Shoal Light 71</b>	<b>LT EXT</b>	<b>11464</b>	<b>040-16 KWT</b>	<b>25/16</b>
50760	Woods Point Daybeacon 1	HAZ NAV/TRLB	11472	079-16 MIA	14/16
51115	St Lucie Canal Daybeacon 37	HAZ NAV/TRLB	11428	121-16 MIA	22/16
51350	Clewiston Channel (Rt 1B) Daybeacon 14	TRUB	11428	363-15 MIA	01/16
56535	Gasparilla Sound Channel Daybeacon 6	TRUB	11425	668-16 STP	24/16
57270	Lemon Bay Channel Light 14	LT EXT	11425	678-16 STP	24/16
57360	Lemon Bay Channel Light 24	LT EXT	11425	679-16 STP	24/16
57940	Venice Inlet-Siesta Key Light 23	LT EXT	11425	670-16 STP	24/16
58670	Siesta Key-Tampa Bay Light 15	STRUCT DEST	11425	676-16 STP	24/16
60495	Tampa Bay Cut B Channel Inbound Range Rear Light	LT IMCH	11416	686-16 STP	24/16
<b>60550</b>	<b>Boca Ciega Bay Daybeacon 7</b>	<b>STRUCT DEST</b>	<b>11415</b>	<b>715-16 STP</b>	<b>25/16</b>

60600	Cats Point Channel Daybeacon 4	TRUB	11411	635-16 STP	23/16
60690	Cats Point Channel Daybeacon 14	HAZ NAV/TRLB	11411	611-16 STP	22/16
61655	The Narrows Daybeacon 37	TRUB	11411	622-16 STP	22/16
61670	The Narrows Daybeacon 40	STRUCT DEST	11411	657-16 STP	24/16

**DISCREPANCIES (FEDERAL AIDS) CORRECTED**

LLNR	Aid Name	Status	Chart No.	BNM Ref.	LNM St	LNM End
745	Lake Worth Lighted Buoy LW	WATCHING PROPERLY	11472		25/16	25/16
1755.5	Little River Inlet Daybeacon 22	REBUILT/RECOVERED	11534		18/16	25/16
2365	Town Creek Daybeacon 25	REBUILT/RECOVERED	11518		42/15	25/16
3590	Ashley River Light 3	RELIGHTED	11524		25/16	25/16
7270	Mile Point Lighted Buoy 22	RESET ON STATION	11491		23/16	25/16
10000	St Lucie Inlet Light 3	RELIGHTED	11472		25/16	25/16
10175	Lake Worth Lighted Buoy LW	WATCHING PROPERLY	11472		25/16	25/16
10320	Port Everglades Entrance Range Front Light	RELIGHTED	11470		25/16	25/16
12425	Channel Key Light 5	RELIGHTED	11449		23/16	25/16
13610	East Turtle Shoal Light 45	RELIGHTED	11449		24/16	25/16
18125	Matanzas Pass Channel Daybeacon 8	WATCHING PROPERLY	11427		23/16	25/16
22330	Egmont Channel Lighted Buoy 18	RELIGHTED	11411		24/16	25/16
22555	Port Manatee Channel Lighted Buoy 12	RELIGHTED	11416		24/16	25/16
29555	Withlacoochee River Entrance Light 32	RELIGHTED	11408		16/16	25/16
29610	Withlacoochee River Daybeacon 38A	WATCHING PROPERLY	11408		25/16	25/16
30505	Steinhatchee River Light 17	RELIGHTED	11407		22/16	25/16
30525.5	Steinhatchee River Light 22	RELIGHTED	11407		22/16	25/16
32290	Cabo Rojo Light	WATCHING PROPERLY	25671		25/16	25/16
33647	Little River-Winyah Bay Obstruction Daybeacon B	REBUILT/RECOVERED	11534		16/16	25/16
33690	Little River-Winyah Bay Daybeacon 19	REBUILT/RECOVERED	11534		25/16	25/16
33940	Little River-Winyah Bay Lighted Buoy 65	RELIGHTED	11534		25/16	25/16
34125	Winyah Bay-Charleston Harbor Daybeacon 5	REBUILT/RECOVERED	11532		17/16	25/16
34500	Winyah Bay-Charleston Harbor Daybeacon 115	REBUILT/RECOVERED	11518		22/16	25/16
34605	Ashley River Light 3	RELIGHTED	11524		25/16	25/16
38055	South Amelia River Daybeacon 23	REBUILT/RECOVERED	11489		23/16	25/16
38315	Sisters Creek Light 79	REBUILT/RECOVERED	11489		22/16	25/16
38910	Tolomato River Lighted Buoy 60	RELIGHTED	11485		24/16	25/16
39650	Matanzas River Daybeacon 104	WATCHING PROPERLY	11485		23/16	25/16
40510	Inlet Harbor Buoy 1	RESET ON STATION	11485		24/16	25/16
40520	Inlet Harbor Buoy 4	RESET ON STATION	11485		25/16	25/16
47190	Hillsboro River Light 68	RELIGHTED	11467		25/16	25/16
47455	Stranahan River Light 27	WATCHING PROPERLY	11470		25/16	25/16
50560	Ramshorn Shoal Light 65	WATCHING PROPERLY	11464		22/16	25/16
53790	Caloosahatchee River Light 72	RELIGHTED	11427		19/16	25/16
59570.5	Siesta Key-Tampa Bay Daybeacon 49A	WATCHING PROPERLY	11425		24/16	25/16
60340	Sunshine Skyway Channel Daybeacon 7	WATCHING PROPERLY	11411		25/16	25/16
60545	Boca Ciega Bay Light 6	RELIGHTED	11415		25/16	25/16
60625	Cats Point Channel Daybeacon 10	WATCHING PROPERLY	11411		25/16	25/16

**DISCREPANCIES (PRIVATE AIDS)**

LLNR	Aid Name	Status	Chart No.	BNM Ref.	LNM St	LNM End
774	Boca Raton Inlet South Jetty Light 1	STRUCT DEST	11472	328-15 MIA	47/15	
1355	Bradenton Beach Fish Haven Buoy	MISSING	11425	918-15 STP	35/15	
1555	Anclote Key Light	LT EXT	11411	409-16 STP	14/16	
3030	Wharf Alpha Fragment Bar Light (1)	STRUCT DEST	11527	260-13 CHA	40/13	

3245	Cooper River Mon Sta Obstruction Light E	LT EXT	11527	263-13 CHA	40/13
3287.1	Upper Cooper River Daybeacon 3	STRUCT DEST	11527	100-16 CHA	18/16
3288.8	Upper Cooper River Daybeacon 26	STRUCT DEST/HAZ NAV	11527	094-14 CHA	13/14
4553	Savannah River Entrance Channel Special Purpose Lighted Buoy	MISSING	11509	183-11 CHA	28/11
4661	Cockspur Lighthouse	LT EXT	11505		33/15
6330	Colonels Island Range Front Light	REDUCED INT	11506	N/A	37/12
6773	Cumberland Sound Shoal Light A	STRUCT DEST	11503	133-14 D7	15/14
6867	Cumberland Sound Shoal Light D	HAZ NAV/LT EXT/DAYMK MISSING/STRUCT DMGD	11503	133-14 D7	15/14
6872	Cumberland Sound Shoal Light F	HAZ NAV/LT EXT/DAYMK MISSING	11503	047-16 JAX	09/16
9740	Sebastian Inlet Channel Buoy 3	OFF STA	11472	111-16 MIA	22/16
9880	Banty Saunders Recreational Area Daybeacon 8	STRUCT DEST	11475	120-16 MIA	22/16
9895	Banty Saunders Recreational Area Daybeacon 12	STRUCT DMGD	11475	101-16 MIA	19/16
10035	Sailfish Point Marina Channel Daybeacon 7	STRUCT DEST	11472	082-16 MIA	15/16
10040	Sailfish Point Marina Channel Buoy 8	STRUCT DEST	11472	058-16 MIA	11/16
10045	Sailfish Point Marina Channel Buoy 9A	STRUCT DEST	11472	058-16 MIA	11/16
10047	Sailfish Point Marina Channel Buoy 9B	STRUCT DEST	11472	058-16 MIA	11/16
10050	Sailfish Point Marina Channel Buoy 10	STRUCT DEST	11472	058-16 MIA	11/16
10055	Sailfish Point Marina Channel Daybeacon 11	STRUCT DEST	11472	059-16 MIA	11/16
10065	Sailfish Point Marina Channel Daybeacon 13	STRUCT DEST	11472	059-16 MIA	11/16
10067	Sailfish Point Marina Channel Buoy 13A	STRUCT DEST	11472	058-16 MIA	11/16
10886	Miami Springs Boat Club Shoal Buoy West	STRUCT DEST	11465	108-12 MIA	17/12
11760	Molasses Reef North Obstruction Daybeacon	DAYMK MISSING	11451	N/A	09/06
11945	Key Largo Ocean Resort Light 2	LT EXT	11451	047-15 KWT	20/15
12501.6	Vaca Cut Daybeacon 13	STRUCT DEST	11453	085-15 KWT	43/15
12509	Pigeon Key Shoal Daybeacon NW	STRUCT DEST	11453	202-14 KWT	05/14
12512	Red Bay Shoal Daybeacon B	DAYMK MISSING	11453	251-12 KWT	42/12
12585	Ohio Key Light 2	STRUCT DEST/HAZ NAV	11445	196-13 KWT	52/13
12595	Ohio Key Channel Daybeacon 4	STRUCT DEST	11446	135-13 KWT	32/13
12885	Yellow Shark Channel Buoy 21	OFF STA	11449	171-13 KWT	44/13
13150	Indian Key Channel Daybeacon 3	STRUCT DEST	11449	065-15 KWT	31/15
13385	Caloosa Cove Channel Daybeacon 11	STRUCT DMGD	11442	004-16 KWT	03/16
13555	Little Crawl Key Channel Daybeacon 3	STRUCT DEST	11449	009-16 KWT	04/16
14780	Casa Marina Daybeacon 1	STRUCT DEST	11446	073-14 KWT	22/14
16120	National Park Service Boat Basin South Channel Daybeacon 4	STRUCT DEST	11430	367-16 STP	13/16
16805	Big Marco River Daybeacon 4	STRUCT DEST	11430	359-16 STP	12/16
16860	Big Marco River Daybeacon 16	STRUCT DEST/HAZ NAV	11430	392-16 STP	13/16
17910	Barefoot Boat Club Daybeacon 8	STRUCT DEST/HAZ NAV	11430	759-14 STP	32/14
17964	New Pass Lighted Buoy 1	OFF STA	11427	494-16 STP	17/16
18142.3	Bunche Beach Channel Daybeacon 2	HAZ NAV/DAYMK MISSING/STRUCT DMGD	11427	1322.15 STP	52/15
18143.5	Bunche Beach Channel Daybeacon 10	STRUCT DEST/HAZ NAV	11427	1323-15 STP	52/15
18350	Hurricane Bay Daybeacon 10	STRUCT DMGD	11427	508-16 STP	17/16
18995.01	Estero Pointe Channel Daybeacon 3	DAYMK MISSING	11427	N/A	02/08
18995.05	Estero Pointe Channel Daybeacon 10	DAYMK DMGD	11427	594-11 STP	21/11
18995.07	Estero Pointe Channel Daybeacon 13	STRUCT DEST	11427		36/13
18996.06	Estero Pointe Channel Daybeacon 28	STRUCT DEST	11427		36/13
19465	Spring Creek Daybeacon 37	STRUCT DEST	11427	1201-14 STP	51/14
19500	Spring Creek Daybeacon 46	TRUB	11427	1199-14 STP	51/14
20000	Burnt Store Marina Light 2	LT EXT	11425	1037-15 STP	40/15

20203	Hayward Canal Daybeacon 3	STRUCT DMGD	11426	305-14 STP	13/14
20500	Isles Channel Light 2	LT EXT	11426	N/A	10/14
20845	Ackerman Waterway Daybeacon 8	DAYMK IMCH	11426	306-14 STP	13/14
20905	Elkcam Waterway Light 1	STRUCT DMGD	11426	307-14 STP	36/13
20980.4	Manchester Waterway Daybeacon 4	STRUCT DEST	11426	463-14 STP	19/14
<b>21410</b>	<b>Stump Pass Marina Daybeacon 6</b>	<b>STRUCT DEST</b>	<b>11425</b>	<b>708-16 STP</b>	<b>25/16</b>
21500.8	Big Sarasota Pass Daybeacon 8	STRUCT DEST/HAZ NAV	11425	680-16 STP	24/16
21525	Big Sarasota Pass Daybeacon 15	STRUCT DEST	11425	208-16 STP	07/16
21530	Big Sarasota Pass Daybeacon 15A	STRUCT DEST	11425	925-14 STP	40/14
21567.5	Lido Key Channel Daybeacon 16	STRUCT DEST	11425	1047-15 STP	40/15
21568.5	Lido Key Channel Daybeacon 18	DAYMK MISSING	11425	1049-15 STP	40/15
21570	Big Sarasota Pass Daybeacon 16	STRUCT DEST	11425	1052-12 STP	11/12
21570.1	North Siesta Key Daybeacon 1	TRUB	11425	056-16 STP	03/16
21577	Big Sarasota Pass Daybeacon 18	DAYMK MISSING/STRUCT DMGD	11425	370-16 STP	40/14
21580	Big Sarasota Pass Daybeacon 19	STRUCT DMGD	11425	1185-14 STP	50/14
21700	Country Club Shores Daybeacon 18	STRUCT DEST	11425	1092-13 STP	48/13
22290	Tampa Bay P.O.R.T.S. Monitor Light P	STRUCT DEST	11415	544-16 STP	21/12
22786	North Yacht Basin Daybeacon 2	STRUCT DEST/HAZ NAV	11415		42/14
23515	Hookers Point North Warning Daybeacon	DAYMK MISSING	11416	229-13 STP	11/13
23525	Bulk Liquid Cargo Dolphin 2 Obstruction Light	LT EXT	11416	228-13 STP	11/13
23530	Bulk Liquid Cargo Dolphin 4 Obstruction Light	LT EXT	11416	1152-10 STP	40/10
23605	Port Sutton Light	STRUCT DEST	11416	230-13 STP	11/13
23610	Marathon Petroleum West Light	LT EXT	11416	N/A	44/10
23820	Weedon Island Channel Lighted Buoy 4	TRUB	11416	085-16 STP	03/16
23850	Weedon Island Channel Lighted Buoy 10	LT EXT	11416	632-16 STP	23/16
23950.5	Old Tampa Bay Pipeline West Light	LT EXT	11416	N/A	13/06
24055	Bridgeview Channel Daybeacon 4	STRUCT DEST	11416	442-07 STP	12/04
24130	Culbreath Bayou South Daybeacon 3	STRUCT DEST/HAZ NAV	11416	051-13 STP	03/13
24210	Dana Shores Daybeacon 9	STRUCT DEST/HAZ NAV	11416	754-15 STP	28/15
24290	Cabbagehead Bayou Daybeacon 2	STRUCT DEST/HAZ NAV		726-14 STP	31/14
<b>24501</b>	<b>Little Harbor Channel Daybeacon 3</b>	<b>STRUCT DEST/HAZ NAV</b>	<b>11416</b>	<b>713-16 STP</b>	<b>25/16</b>
24610.1	Apollo Beach Light 2	STRUCT DEST	11416	1106-15 STP	43/15
25965	Dunedin Marina Light 4	LT EXT/DAYMK MISSING	11411	349-10 STP	12/10
28220	Holder Rock Obstruction Daybeacon	STRUCT DMGD	11409	608-15 STP	22/15
28960	Florida Power Corporation Channel Light 3	LT IMCH	11408	539-16 STP	19/16
28965	Florida Power Corporation Channel Light 4	LT IMCH	11408	539-16 STP	19/16
28980	Florida Power Corporation Channel Light 7	LT IMCH	11408	539-16 STP	19/16
28985	Florida Power Corporation Channel Light 8	LT EXT	11408	539-16 STP	19/16
29020	Florida Power Corporation Channel Light 17	LT IMCH	11408	539-16 STP	19/16
29030	Florida Power Corporation Channel Light 20	LT IMCH	11408	539-16 STP	19/16
29035	Florida Power Corporation Channel Light 21	LT EXT	11408	539-16 STP	19/16
29040	Florida Power Corporation Channel Light 23	REDUCED INT	11408	539-16 STP	19/16
29060	Florida Power Corporation Channel Light 28	REDUCED INT	11408	539-16 STP	19/16
29070	Florida Power Corporation Channel Light 31	LT EXT	11408	539-16 STP	19/16
29080	Florida Power Corporation Channel Light 33	LT IMCH	11408	539-16 STP	19/16
29105	Florida Power Corporation Channel Light 38	LT EXT	11408	539-16 STP	19/16

29110	Florida Power Corporation Channel Light 39	LT EXT	11408	539-16 STP	19/16
29150	Florida Power Corporation Channel Light 47	LT IMCH	11408	539-16 STP	19/16
29155	Florida Power Corporation Channel Light 48	LT IMCH	11408	539-16 STP	19/16
30200	Suwannee River Mcgriff Pass Daybeacon 7	STRUCT DEST	11408		23/14
30245	Suwannee River Mcgriff Pass Daybeacon 28	STRUCT DEST	11408		20/14
30825	Tmt Outer Dolphin Obstruction Light	LT EXT	25670	231-07 GAN	36/07
30830	Tmt Middle Dolphin Obstruction Light	LT EXT	25670	320-05 SJN	47/05
31255	Isleta Marina Pier D Light	LT EXT	25667	188-11 SJN	31/11
31275	Isla Palominos Marina Buoy 2	MISSING	25667	087-13 SJN	22/13
31335.1	Puerto Del Ray North Channel Lighted Buoy 6	OFF STA	25663	237-13 SJN	50/13
31590	Vieques Naval Pier Light (2)	LT EXT	25664	085-16 SJN	18/16
31595	Vieques Naval Breakwater Light	LT EXT	25664	084-16 SJN	18/16
32030	Bahia De Tallaboa Light 7A	LT EXT	25681	023-10 SJN	08/10
32680	Johnson Reef Buoy JA	OFF STA	25647	068-15 SJN	21/15
32680.1	Johnson Reef Lighted Buoy JB	DAYMK IMCH	25647	207-08 SJN	34/08
32680.1	Johnson Reef Lighted Buoy JB	LT EXT	25647	038-16 SJN	08/16
32680.3	Johnson Reef Lighted Buoy JD	LT EXT	25647	204-15 SJN	46/15
33053	North Lang Bank Fad Lighted Buoy B	OFF STA	25641	030-09 SJN	07/09
35015	Dawhoo Fishing Pier Obstruction Light	STRUCT DMGD	11517	208-11 CHA	30/11
35407.1	Pigeon Point Obstruction Daybeacon B	DAYMK MISSING	11518	317-15 CHA	43/15
35425	Marsh Harbor Marina Daybeacon 4	DAYMK MISSING	11518	126-13 CHA	19/13
35585	Trenchards Inlet Tide Gauge Daybeacon	DAYMK IMCH	11516	N/A	03/04
35590	Station Creek West Tide Gauge Daybeacon	Status Unreported	11516	N/A	03/04
35630	Ribaut Island Dock Light G	LT EXT	11507	N/A	04/05
36241.1	Delegal Creek Channel Light 8	LT EXT	11507		39/15
36242.2	Water Island Channel Lighted Buoy 3	LT EXT	25649	162-15 SAJ	39/15
37140	Jove Creek Northwest Obstruction Daybeacon	DAYMK DMGD	11506	182-14 CHA	27/14
37804	Cumberland Sound Shoal Light F	HAZ NAV/LT EXT/DAYMK MISSING	11503	047-16 JAX	09/16
37808	Cumberland Sound Shoal Light D	HAZ NAV/LT EXT/DAYMK MISSING/STRUCT DMGD	11503	133-14 D7	15/14
37843	Cumberland Sound Shoal Light A	STRUCT DEST	11503	133-14 D7	15/14
38845	Camachee Cove Range Front Light	LT EXT	11485	060-14 JAX	08/14
38930	Salt Run Daybeacon 4	STRUCT DEST	11485	680-16 STP	24/16
39052	FDOT Bridge Of Lions North Breasting Light	LT IMCH	11485	137-14 JAX	19/14
39053	FDOT Bridge Of Lions C Breasting Light	LT IMCH	11485	138-14 JAX	19/14
39054	FDOT Bridge Of Lions South Breasting Light	LT IMCH	11485	139-14 JAX	19/14
40250	Matthews Marina Daybeacon 1	STRUCT DEST	11485	414-12 JAX	47/12
40775	Smyrna Yacht Club Daybeacon 3	DAYMK DMGD	11485	093-13 JAX	14/13
42135	Indian Cove Marina Daybeacon 2	DAYMK DMGD	11485	N/A	40/07
42250	Indian River Yacht Club Race Course Buoy D	MISSING	11485	212-12 JAX	21/12
42492	Manatee Cove Marina Range Rear Light	LT EXT	11476	086-12 JAX	11/12
42620	Pelican Creek Daybeacon 3	DAYMK DMGD	11476	103-11 JAX	13/11
42830	Central Avenue Entrance Channel Light 2	LT EXT	11476	232-15 JAX	42/15
42855	Central Avenue Entrance Channel Daybeacon 7	STRUCT DEST	11476	141-14 JAX	19/14
42945	Sandpiper Channel Light 2	LT EXT	11476	134-14 JAX	19/14
43115	Intracoastal Marina Channel Daybeacon 1	DAYMK MISSING	11476		18/15

43120	Intracoastal Marina Channel Daybeacon 2	STRUCT DMGD	11476	204-13 JAX	29/13
43125	Intracoastal Marina Channel Daybeacon 3	DAYMK MISSING	11476		18/15
43130	Intracoastal Marina Channel Daybeacon 4	STRUCT DEST	11476	124-12 JAX	15/12
43135	Intracoastal Marina Channel Daybeacon 5	DAYMK MISSING	11476	282-14 JAX	44/14
43140	Intracoastal Marina Channel Daybeacon 6	DAYMK MISSING	11476		18/15
43150	Intracoastal Marina Channel Daybeacon 8	DAYMK MISSING	11476		18/15
43155	Intracoastal Marina Channel Daybeacon 9	DAYMK MISSING	11476		18/15
43165	Intracoastal Marina Channel Daybeacon 12	DAYMK MISSING	11476		18/15
43630.7	Sembler Marina North Channel Daybeacon 8	DAYMK MISSING	11472	059-13 MIA	08/13
43635	Sembler Daybeacon 1	DAYMK MISSING	11476	062-13 MIA	08/13
43640	Sembler Daybeacon 2	DAYMK MISSING	11476	061-13 MIA	08/13
43685.2	Channel 68 Marina Daybeacon 2	DAYMK MISSING	11472	N/A	10/03
44245	Vero Marine Center Buoy 8A	MISSING	11476	275-12 MIA	39/12
44250	Vero Marine Center Buoy 8B	MISSING	11476	276-12 MIA	39/12
44985	Village Marina Daybeacon 2	STRUCT DEST	11476	112-16 MIA	22/16
45035	Riverside Marina (Ft. Pierce) Daybeacon 1	STRUCT DEST	11476	113-16 MIA	22/16
45050	Riverside Marina(Ft. Pierce) Daybeacon 4	DAYMK IMCH	11476	114-16 MIA	22/16
45055	Riverside Marina(Ft. Pierce) Daybeacon 5	STRUCT DEST	11476	115-16 MIA	22/16
45065	Riverside Marina(Ft. Pierce) Daybeacon 7	DAYMK MISSING	11476	116-16 MIA	22/16
45070	Riverside Marina(Ft. Pierce) Daybeacon 8	DAYMK MISSING	11476	117-16 MIA	22/16
45185	Faber Cove Daybeacon 14	STRUCT DEST	11476	094-16 MIA	17/16
45395	Island Dunes Marina Daybeacon 2	DAYMK DMGD	11472	211-11 MIA	44/11
45400	Island Dunes Marina Daybeacon 3	DAYMK DMGD	11472	212-11 MIA	44/11
45405	Island Dunes Marina Daybeacon 4	DAYMK DMGD	11472	213-11 MIA	44/11
45410	Island Dunes Marina Daybeacon 5	DAYMK DMGD	11472	214-11 MIA	44/11
45615	Rigels Cove Channel Daybeacon 7	DAYMK IMCH	11472	244-15 MIA	30/15
45820	Ind River Plantation Marina Channel Daybeacon 1	STRUCT DEST/HAZ NAV	11472	163-15 MIA	17/15
45885	Sewalls Point Daybeacon 1	DAYMK MISSING	11472	430-13 MIA	52/13
45890	Sewalls Point Daybeacon 2	DAYMK MISSING	11472	429-13 MIA	52/13
45895	Sewalls Point Daybeacon 3	DAYMK MISSING	11472	430-13 MIA	52/13
45900	Sewalls Point Daybeacon 4	DAYMK MISSING	11472	431-13 MIA	52/13
46260	Loxahatchee River Daybeacon 2	STRUCT DEST	11472	103-16 MIA	20/16
46351	Loxahatchee River North Fork Buoy 9	STRUCT DEST	11472	355-15 MIA	52/15
46680	Old Slip Marina Daybeacon 4	STRUCT DEST/HAZ NAV	11476	302-15 MIA	40/15
47050	Ocean Inlet Park Daybeacon 3	MISSING	11467	048-16 MIA	10/16
47055	Ocean Inlet Park Daybeacon 4	STRUCT DEST	11467	049-16 MIA	10/16
47060	Ocean Inlet Park Daybeacon 5	STRUCT DEST	11467	050-16 MIA	10/16
47065	Ocean Inlet Park Daybeacon 6	STRUCT DEST	11467	051-16 MIA	10/16
47070	Ocean Inlet Park Daybeacon 7	STRUCT DEST	11467	052-16 MIA	10/16
47075	Ocean Inlet Park Daybeacon 8	STRUCT DEST	11467	053-16 MIA	10/16
47460	Pier 66 Marina Daybeacon 1	DAYMK DMGD	11467	N/A	20/10
47640	Golden Gates Marina South Obstruction Light	LT IMCH	11467	N/A	42/07
47750	East Greynolds Park Artificial Reef Daybeacon B	DAYMK MISSING	11467		12/16
48405	Sea Isle Marina Daybeacon 2	STRUCT DEST	11468	084-15 MIA	08/15

48500	Claughton Island North Obstruction Daybeacon	DAYMK DMGD	11465	330-06 MIA	27/06
48505	Claughton Island Middle Obstruction Daybeacon	DAYMK MISSING	11465	637-04 MIA	51/04
48510	Claughton Island South Obstruction Daybeacon	STRUCT DEST	11465	235-13 MIA	28/13
49010	John A Brennan Channel Daybeacon 7	STRUCT DMGD	11467	395-12 MIA	01/13
49240	Entrada Channel Daybeacon 1	HAZ NAV/DAYMK MISSING	11465	018-16 MIA	03/16
49245	Entrada Channel Daybeacon 3	HAZ NAV/DAYMK MISSING	11465	018-16 MIA	03/16
49250	Entrada Channel Daybeacon 5	HAZ NAV/DAYMK MISSING	11465	018-16 MIA	03/16
49255	Entrada Channel Daybeacon 7	HAZ NAV/DAYMK MISSING	11465	018-16 MIA	03/16
49260	Entrada Channel Daybeacon 9	HAZ NAV/DAYMK MISSING	11465	018-16 MIA	03/16
49300	Coral Gables Waterway Daybeacon 4	HAZ NAV/DAYMK MISSING	11465	029-16 MIA	06/16
50295	The Moorings Daybeacon 2	DAYMK MISSING	11451	N/A	19/06
50300	The Moorings Daybeacon 3	DAYMK MISSING	11451	N/A	19/06
50305	The Moorings Daybeacon 4	DAYMK MISSING	11451	N/A	19/06
50550	Little Basin East Daybeacon 3	STRUCT DEST/HAZ NAV	11451	018-16 KWT	12/16
50665	Sewalls Point Channel Daybeacon 3	DAYMK MISSING	11472	432-13 MIA	52/13
50670	Sewalls Point Channel Daybeacon 4	DAYMK MISSING	11472	433-13 MIA	52/13
51640	Pahokee Harbor Obstruction Daybeacon	DAYMK DMGD	11428	192-12 MIA	27/12
52940	Paradise Yacht Club Daybeacon 7	DAYMK MISSING	11428	462-14 STP	19/14
52995	Paradise Yacht Club Daybeacon 18	DAYMK MISSING	11428	465-14 STP	19/14
53000	Paradise Yacht Club Daybeacon 19	STRUCT DEST	11428	464-14 STP	19/14
<b>53295</b>	<b>Moody Canal Daybeacon 2</b>	<b>STRUCT DEST/HAZ NAV</b>	<b>11427</b>	<b>707-16 STP</b>	<b>25/16</b>
<b>53420</b>	<b>Plato Canal Daybeacon 2</b>	<b>STRUCT DEST</b>	<b>11427</b>	<b>693-16 STP</b>	<b>25/16</b>
54250	Peppertree Pointe Daybeacon 12	STRUCT DEST	11427	556-14 STP	23/14
54695	Cape Coral Southwest Channel Daybeacon 17	STRUCT DEST	11427	660-16 STP	24/16
55125	Matlacha Pass Daybeacon 51	TRUB	11426	4585-16 STP	16/16
55260	Matlacha Pass Daybeacon 92	TRUB	11426	517-16 STP	18/16
55920	Safety Harbor Channel Daybeacon 2	DAYMK IMCH	11426	270-14 STP	11/14
56245	Wilson Cut Channel Daybeacon 4	STRUCT DEST	11427	398-16 STP	14/16
56265	Wilson Cut Channel Daybeacon 8	DAYMK IMCH	11427	398-16 STP	14/16
56295	Wilson Cut Channel Daybeacon 14	STRUCT DMGD	11427	398-16 STP	14/16
56300	Wilson Cut Channel Daybeacon 15	DAYMK MISSING	11427	398-16 STP	14/16
56305	Wilson Cut Channel Daybeacon 16	DAYMK MISSING	11427	267-14 STP	11/14
56330	Wilson Cut Channel Daybeacon 21	DAYMK IMCH	11427	398-16 STP	14/16
56345	Wilson Cut Channel Daybeacon 24	DAYMK IMCH	11427	268-14 STP	11/14
56355	Wilson Cut Channel Daybeacon 26	STRUCT DEST	11427	269-14 STP	11/14
56560	Gasparilla Island Daybeacon 1	STRUCT DEST	11425	609-15 STP	22/15
56670	Fishery Restaurant Channel Daybeacon 5	STRUCT DEST	11425	081-16 STP	03/16
57210	Knights Pass Channel Daybeacon 7	DAYMK IMCH	11425	464-10 STP	16/10
57290	Daughtrey Landing Daybeacon 2	DAYMK DMGD	11425	462-10 STP	16/10
57295	Daughtrey Landing Daybeacon 3	DAYMK MISSING	11425	724-06 STP	21/05
57485	Royal Palm Marina Buoy 5	DAYMK IMCH	11425	N/A	19/10
57570	Lemon Bay Daybeacon 3	DAYMK DMGD	11425	N/A	19/10
57580	Lemon Bay Daybeacon 5	STRUCT DEST	11425	N/A	19/10
57740	Eagle Point Daybeacon 5	STRUCT DEST	11452	696-10 STP	23/10
58112	Casey Key Daybeacon 2	STRUCT DEST	11425	880-13 STP	39/13
58114	Casey Key Daybeacon 3	STRUCT DEST	11425	878-13 STP	39/13
58195	Midnight Pass Lagoon Daybeacon 6	STRUCT DEST	11425		50/14
58205.6	Midnight Pass Daybeacon 19	STRUCT DEST	11425	879-13 STP	39/13
<b>59140</b>	<b>Longboat Harbor North Marina Daybeacon 4</b>	<b>STRUCT DEST</b>	<b>11425</b>	<b>697-16 STP</b>	<b>25/16</b>
<b>59145</b>	<b>Longboat Harbor North Marina Daybeacon 6</b>	<b>STRUCT DEST</b>	<b>11425</b>	<b>697-16 STP</b>	<b>25/16</b>

59150	Longboat Harbor North Marina Daybeacon 8	STRUCT DEST	11425	697-16 STP	25/16
59245	Buccaneer Inn Daybeacon 10	STRUCT DEST	11425	916-13 STP	40/13
59405	Coral Shores Channel Daybeacon 9	STRUCT DEST	11425	659-15 STP	25/15
59642	Palma Sola Bay Channel Daybeacon 4	STRUCT DEST	11425	522-16 STP	18/16
59700	Perico Bayou Channel Daybeacon 6A	Status Unreported	11415	N/A	10/09
59803	San Remo Shore Channel Daybeacon 14	DAYMK MISSING	11425	N/A	40/09
59805	San Remo Shore Channel Daybeacon 15	DAYMK MISSING	11425	N/A	40/09
59810	San Remo Shore Channel Daybeacon 16	DAYMK MISSING	11425	N/A	40/09
59895	Palma Sola Park Channel Daybeacon 2	DAYMK DMGD	11415	N/A	24/09
59940	Bradenton Beach City Channel Daybeacon 2	DAYMK MISSING	11425	N/A	24/09
60065	Perico Harbor Marina Daybeacon 2	DAYMK MISSING	11415	N/A	24/09
60070	Perico Harbor Marina Daybeacon 3	LT IMCH	11415	N/A	45/07
60085	Perico Harbor Marina Daybeacon 6	DAYMK MISSING	11415	N/A	24/09
60130	Perico Harbor Marina Daybeacon 15	DAYMK MISSING	11415	N/A	24/09
60985	South Pasadena Marina Daybeacon 6	STRUCT DEST	11411	1103-12 STP	43/12
60990	South Pasadena Marina Daybeacon 7	STRUCT DEST	11411	599-13 STP	26/13
60995	South Pasadena Marina Daybeacon 8	STRUCT DEST	11411	600-13 STP	26/13
61000	South Pasadena Marina Daybeacon 9	STRUCT DEST	11411	601-13 STP	20/13
61005	South Pasadena Marina Daybeacon 10	STRUCT DEST	11411	602-13 STP	26/13
61010.01	South Pasadena Marina Daybeacon 12	STRUCT DEST	11411	603-13 STP	26/13
61975	Marker 1 Marina Channel Daybeacon 1	STRUCT DEST		1113-13 STP	48/13
62005	Marker 1 Marina Channel Daybeacon 7	STRUCT DEST		697-10 STP	23/10
62245	Tarpon Cove Daybeacon 20	DAYMK DMGD	11411	N/A	17/06
	Ribaut Island Dock Light A	LT EXT	11507	N/A	04/05
	Ribaut Island Dock Light C	LT EXT	11507	N/A	04/05

#### DISCREPANCIES (PRIVATE AIDS) CORRECTED

LLNR	Aid Name	Status	Chart No.	BNM Ref.	LNM St	LNM End
3015	Cooper River Ammunition Pier Light	RELIGHTED	11527		40/13	25/16
3025	Cooper River Pier A Light A	RELIGHTED	11527		40/13	25/16
3035	Cooper River Pier A Light B	RELIGHTED	11527		40/13	25/16
26454.2	Big Bayou Point Channel Daybeacon 5	WATCHING PROPERLY	11411		46/10	25/16
54730	Shell Point Village Daybeacon 5	WATCHING PROPERLY	11427		28/05	25/16

#### PLATFORM DISCREPANCIES

Name	Status	Position	BNM Ref.	LNM St	LNM End
None					

#### PLATFORM DISCREPANCIES CORRECTED

Name	Status	Position	BNM Ref.	LNM St	LNM End
None					

### SECTION III - TEMPORARY CHANGES and TEMPORARY CHANGES CORRECTED

This section contains temporary changes and corrections to Aids to Navigation for this edition. When charted aids are temporarily relocated for dredging, testing, evaluation, or marking an obstruction, a temporary correction shall be listed in Section IV giving the new position.

#### TEMPORARY CHANGES

LLNR	Aid Name	Status	Chart No.	BNM Ref.	LNM St	LNM End
935	Pacific Reef Light	TRLT	11451	074-13 MIA	32/15	
950	Elbow Reef Light 6	TRLT	11463	025-16 MIA	04/16	
1010	Looe Key Light 24	Reduced Intensity	11445	N/A	30/15	

1380	Egmont Channel Range Rear Light	Reduced Intensity	11411	378-16 STP	13/16
1755.5	Little River Inlet Daybeacon 22	TRUB	11534	103-16 CHA	19/16
3880	North Edisto River Inner Buoy 7	TRUB	11522	075-15 CHA	13/15
4400	Broad Creek Daybeacon 1	TRUB	11512	368-15 CHA	49/15
4595	Bloody Point Range Lighted Buoy 9	RELOCATED FOR DREDGING	11505	378-15 CHA	50/15
4600	Bloody Point Range Lighted Buoy 10	RELOCATED FOR DREDGING	11505	388-15 CHA	50/15
4850	Elba Island Light 39	TRLB	11507	293-15 CHA	40/15
4965	Elba Island Light 49	TRLB	11507		13/16
4990	Barnwell Island Flats Lighted Buoy 52A	RELOCATED	11514	188-15 CHA	26/15
5025	City Front Channel Light 62	TRLB	11514	210-14 CHA	33/14
5970	Hampton River Daybeacon 11	TRLB	11507	322-15 CHA	45/15
6015	Hampton River Daybeacon 23	TRLB	11507	323-15 CHA	44/15
6445	Satilla River Light 6	TRLB	11489	141-16 CHA	24/16
7275	Mile Point Jetty East Daybeacon	TRUB	11491	061-16 JAX	11/16
7410	Blount Island Channel Light 1	TRLB	11491	130-16 JAX	22/16
9565	Ponce De Leon Inlet Light 11	TRLB	11485	140-16 JAX	24/16
9655	Canaveral Harbor Entrance Channel Light 14	DISCONTINUED FOR DREDGING	11478	181-14 JAX	26/14
9670	Canaveral Harbor Entrance Channel Light 12A	DISCONTINUED FOR DREDGING	11478	090-15 JAX	15/15
10213	Singer Island Channel Daybeacon 8	RELOCATED	11472	118-16 MIA	22/16
10213	Singer Island Channel Daybeacon 8	TRLB	11472	118-16 MIA	22/16
10255	Lake Worth Inlet Light 13	TRLB	11472	061-16 MIA	11/16
10355	Port Everglades Turning Basin Light 11	TRLB	11470	095-16 MIA	18/16
10550	Miami Main Channel Light 15	RELOCATED FOR DREDGING	11468	N/A	14/15
10550	Miami Main Channel Light 15	TRLB	11468	038-14 MIA	06/14
10655	Fishermans Channel Light 5	RELOCATED FOR DREDGING	11468	082-15 MIA	12/15
10655	Fishermans Channel Light 5	TRLB	11468	038-14 MIA	06/14
10660	Fishermans Channel Light 7	TRLB	11468	038-14 MIA	06/14
10665	Fishermans Channel Light 9	RELOCATED FOR DREDGING	11468	167-15 MIA	18/15
10665	Fishermans Channel Light 9	TRLB	11468	019-14 MIA	03/14
10675	Lumms Island Turning Basin Light A	DISCONTINUED FOR DREDGING	11468	231-15 MIA	28/15
10675	Lumms Island Turning Basin Light A	TRLB	11468	038-14 MIA	06/14
10680	Lumms Island Turning Basin Light B	DISCONTINUED FOR DREDGING	11468		01/15
10680	Lumms Island Turning Basin Light B	TRLB	11468	181-14 MIA	17/14
10680.7	Lumms Island Turning Basin Light E	DISCONTINUED FOR DREDGING	11468	196-15 MIA	21/15
10680.7	Lumms Island Turning Basin Light E	TRLB	11468	038-14 MIA	06/14
10685	Fishermans Channel Light 11	TRLB	11468	038-14 MIA	06/14
10740	Miami Main Channel Light 19	TRLB	11468	038-14 MIA	06/14
10745	Miami Main Channel Light 20	DISCONTINUED FOR DREDGING	11468	329-14 MIA	40/14
11130	Caesar Creek Daybeacon 30	RELOCATED	11463	110-16 MIA	22/16
11130	Caesar Creek Daybeacon 30	TRLB	11463	110-16 MIA	22/16
11800	Largo Sound Channel Daybeacon 7	TRLB	11464		11/16

11890	Mosquito Bank Light 35	TRLT	11464		41/15
<b>12065</b>	<b>Tavernier Creek Light</b>	<b>TRLT</b>	<b>11464</b>	037-16 KWT	<b>25/16</b>
15995	Indian Key Pass Daybeacon 9	TRUB	11430	676-15 STP	25/15
16005	Indian Key Pass Daybeacon 11	TRUB	11430	681-15 STP	25/15
<b>16983</b>	<b>Capri Pass Daybeacon 8</b>	<b>TRUB</b>	<b>11430</b>	696-16 STP	<b>25/16</b>
17380	Big Marco Pass-Gordon Pass Daybeacon 55	TRUB	11430	532-16 STP	18/16
17455	Gordon Pass Channel Light 2	TRLB	11430	266-16 STP	10/16
18090	Matanzas Pass Channel Daybeacon 3	RELOCATED FOR DREDGING	11427	585-16 STP	21/16
18090	Matanzas Pass Channel Daybeacon 3	TRUB	11427	585-16 STP	21/16
18095	Matanzas Pass Channel Daybeacon 4	RELOCATED FOR DREDGING	11427	585-16 STP	21/16
18095	Matanzas Pass Channel Daybeacon 4	TRUB	11427	585-16 STP	21/16
18107	Matanzas Pass Channel Light 5	RELOCATED FOR DREDGING	11427	585-16 STP	21/16
18107	Matanzas Pass Channel Light 5	TRLB	11427	585-16 STP	21/16
18110	Matanzas Pass Channel Daybeacon 6	RELOCATED FOR DREDGING	11427	585-16 STP	21/16
18110	Matanzas Pass Channel Daybeacon 6	TRUB	11427	585-16 STP	21/16
18230	Matanzas Pass Channel Daybeacon 11	RELOCATED FOR DREDGING	11427	585-16 STP	21/16
18230	Matanzas Pass Channel Daybeacon 11	TRUB	11427	585-16 STP	21/16
18520	North Estero Bay Daybeacon 7	TRUB	11427	143-16 STP	06/16
19500	Spring Creek Daybeacon 46	TRUB	11427		20/16
21155	Peace River Daybeacon 11	RELOCATED	11426	133-16 STP	06/16
21155	Peace River Daybeacon 11	TRUB	11426	133-16 STP	06/16
21570.1	North Siesta Key Daybeacon 1	TRUB	11425	N/A	08/16
21590	New Pass Channel Buoy 1	DISCONTINUED	11425	302-16 STP	13/16
21595	New Pass Channel Buoy 2	DISCONTINUED	11425	302-16 STP	13/16
21600	New Pass Channel Buoy 3A	DISCONTINUED	11425	302-16 STP	13/16
21603	New Pass Channel Buoy 4	DISCONTINUED	11425	302-16 STP	13/16
21605	New Pass Channel Buoy 5	DISCONTINUED	11425	302-16 STP	13/16
21610	New Pass Channel Buoy 5A	DISCONTINUED	11425	302-16 STP	13/16
21757	Longboat Pass Daybeacon 1	TRUB	11425	1103-14 STP	48/14
21758	Longboat Pass Daybeacon 2	TRUB	11425	499-14 STP	20/14
22090	Manatee River Daybeacon 26	TRUB	11416	529-16 STP	18/16
22285	Egmont Channel Range Rear Light	Reduced Intensity	11411	378-16 STP	13/16
22355	Mullet Key Channel Range Front Light	TRUB	11415		32/15
23560	Sparkman Channel Light 5	TRLB	11416	742-13 STP	33/13
23595	Port Sutton Channel Light 3	TRLB	11416	289-16 STP	10/16
23725	Tampa Bay Cut J Channel Outbound Range Rear Light	TRLT	11416	579-16 STP	23/16
23820	Weedon Island Channel Lighted Buoy 4	TRUB	11416	N/A	23/16
25730	Clearwater Marina Channel Light 2	DISCONTINUED	11411	640-15 STP	27/15
26085	Anclote Anchorage South Entrance Daybeacon 5	DISCONTINUED	11411	949-14 STP	42/14
26085	Anclote Anchorage South Entrance Daybeacon 5	TRUB	11411	949-14 STP	42/14
26095	Anclote Anchorage South Entrance Daybeacon 6	DISCONTINUED	11411	949-14 STP	42/14
26240	Anclote River Daybeacon 21	TRUB	11411	436-16 STP	15/16

28775	Crystal River Entrance Light 1	TRLB	11408	110-16 STP	05/16
<b>29440</b>	<b>Withlacoochee River Entrance Daybeacon 13</b>	<b>TRUB</b>	<b>11408</b>	<b>694-16 STP</b>	<b>25/16</b>
29650	Withlacoochee River Daybeacon 46	TRUB	11408	831-14 STP	36/14
30581	Steinhatchee River Daybeacon 50	TRLB	11407	862-14 STP	37/14
30605	Keaton Beach Daybeacon 3	TRLB	11407	502-15 STP	18/15
31155	Cabo San Juan Light	Reduced Intensity	25667	204-14 SJN	43/14
31755	Puerto Yabucoa Channel Lighted Buoy 2	TRUB	25661	N/A	08/16
31770	Puerto Yabucoa Channel Light 6	TRLB	25661	N/A	08/16
32110	Bahia De Guayanilla Lighted Buoy 6	TRLB	25681	142-15 SAJ	38/15
33415	St Nicolas Point Channel Light 7	TRLB	26230		01/16
33750	Little River-Winyah Bay Daybeacon 27	TRUB	11534	248-14 CHA	36/14
34355	Winyah Bay-Charleston Harbor Daybeacon 73	TRUB	11518	328-14 CHA	44/14
34510.5	Winyah Bay-Charleston Harbor Daybeacon 117A	RELOCATED FOR DREDGING	11518	028-16 CHA	06/16
34510.5	Winyah Bay-Charleston Harbor Daybeacon 117A	TRUB	11518	028-16 CHA	06/16
34630.5	Stono River Daybeacon 18	TRUB	11518	138-16 CHA	24/16
34955	Dawho River Daybeacon 112	TRUB	11517	127-16 CHA	22/16
35485	Beaufort River Daybeacon 244	TRUB	11516	099-16 CHA	18/16
35660	Skull Creek Daybeacon 10	TRUB	11507	217-15 CHA	31/15
35700	Skull Creek Daybeacon 20	TRUB	11507	369-15 CHA	49/15
35725	Jenkins Island Flat Daybeacon 27	TRUB	11507		35/15
36515	North Newport River Light 123	TRLB	11507	117-15 CHA	16/15
36630	Sapelo Sound Daybeacon 136A	TRUB	11507	208-14 JAX	30/14
36640	Sapelo Sound Light 142	TRLB	11507	148-15 CHA	23/15
36770	Old Teakettle Creek Daybeacon 168	TRUB	11507	069-16 CHA	14/16
36795	Doboy Sound Light 178	RELOCATED	11507	105-16 CHA	19/16
36795	Doboy Sound Light 178	TRLB	11507	105-16 CHA	19/16
36826.1	Darien River Daybeacon 8	TRUB	11507	134-15 CHA	20/15
37535	Cumberland River Light 45A	TRLB	11489	036-16 JAX	08/16
37610	Cumberland River Light 60	TRLB	11489	090-16 CHA	17/16
37615	Cumberland River Light 60A	TRLB	11489	090-16 CHA	17/16
38035	Kingsley Creek Cut Daybeacon 18	TRUB	11489		51/15
38165	South Amelia River Light 46	TRLB	11489	263-15 JAX	47/15
38360	Pablo Creek Light 5	RELOCATED FOR DREDGING	11491		17/16
38360	Pablo Creek Light 5	TRUB	11491		17/16
38365	Pablo Creek Light 6	RELOCATED FOR DREDGING	11491		17/16
38365	Pablo Creek Light 6	TRUB	11491		17/16
38370	Pablo Creek Daybeacon 7	RELOCATED FOR DREDGING	11489		17/16
38370	Pablo Creek Daybeacon 7	TRUB	11489		17/16
<b>38635</b>	<b>Tolomato River Daybeacon 7</b>	<b>TRUB</b>	<b>11489</b>		<b>25/16</b>
<b>39120</b>	<b>San Sebastian River Daybeacon 6</b>	<b>TRLB</b>	<b>11485</b>	<b>150-16 JAX</b>	<b>25/16</b>
<b>39885</b>	<b>Halifax River Daybeacon 14</b>	<b>TRUB</b>	<b>11485</b>		<b>25/16</b>
40820	New Smyrna Beach Daybeacon 55	TRUB	11485	231-15 JAX	41/15

40870	New Smyrna Beach Daybeacon 68	TRUB	11485	255-15 JAX	46/15
42500	Banana River Daybeacon 6B	TRUB	11472	068-16 JAX	12/16
42590	Banana River Daybeacon 24	TRUB	11481	203-14 JAX	30/14
<b>43860</b>	<b>Indian River (South Section) Light 96</b>	<b>TRLB</b>	<b>11472</b>	<b>136-16 MIA</b>	<b>25/16</b>
44475	Indian River (South Section) Light 148	TRLB	11472	063-16 MIA	11/16
46655	Lake Worth North Daybeacon 40	DISCONTINUED FOR DREDGING	11472	032-16 MIA	07/16
46655	Lake Worth North Daybeacon 40	TRUB	11472	032-16 MIA	08/16
46700	Lake Worth North Daybeacon 41	DISCONTINUED FOR DREDGING	11472	351-15 MIA	51/15
46700	Lake Worth North Daybeacon 41	TRUB	11472	351-15 MIA	51/15
46880	Lake Worth South Daybeacon 14	TRUB	11472		22/16
47485	Port Everglades Turning Basin Light 11	TRLB	11470	095-16 MIA	18/16
48360	Biscayne Bay Daybeacon 41	TRUB	11467	123-16 MIA	22/16
48490	Biscayne Bay Daybeacon 57	TRUB	11468	099-16 MIA	19/16
48925	Dinner Key Channel Daybeacon 3	TRLB	11465	081-16 MIA	15/16
50470	Baker Cut Daybeacon 58A	TRUB	11464		21/16
50760	Woods Point Daybeacon 1	TRLB	11472	079-16 MIA	14/16
51115	St Lucie Canal Daybeacon 37	TRLB	11428	121-16 MIA	22/16
51350	Clewiston Channel (Rt 1B) Daybeacon 14	TRUB	11428	363-15 MIA	01/16
55125	Matlacha Pass Daybeacon 51	TRUB	11426		18/16
56535	Gasparilla Sound Channel Daybeacon 6	TRUB	11425	668-16 STP	24/16
58670	Siesta Key-Tampa Bay Light 15	TRLB	11425	676-16 STP	24/16
60600	Cats Point Channel Daybeacon 4	TRUB	11411	635-16 STP	23/16
60690	Cats Point Channel Daybeacon 14	TRLB	11411	611-16 STP	22/16
61655	The Narrows Daybeacon 37	TRUB	11411	622-16 STP	22/16
61670	The Narrows Daybeacon 40	TRUB	11411	657-16 STP	24/16

**TEMPORARY CHANGES CORRECTED**

LLNR	Aid Name	Status	Chart No.	BNM Ref.	LNM St	LNM End
2365	Town Creek Daybeacon 25	No Longer Required	11518		43/15	25/16
33647	Little River-Winyah Bay Obstruction Daybeacon B	No Longer Required	11534		17/16	25/16
34500	Winyah Bay-Charleston Harbor Daybeacon 115	No Longer Required	11518		22/16	25/16
38055	South Amelia River Daybeacon 23	No Longer Required	11489		23/16	25/16
38315	Sisters Creek Light 79	No Longer Required	11489		22/16	25/16
46430	Lake Worth Creek Light 25	LWP	11472		46/15	25/16
47725	Dumfoundling Bay Daybeacon 54	No Longer Required	11467		52/15	18/17

**PLATFORM TEMPORARY CHANGES**

Name	Status	Position	BNM Ref.	LNM St	LNM End
None					

**PLATFORM TEMPORARY CHANGES CORRECTED**

Name	Status	Position	BNM Ref.	LNM St	LNM End
None					

## SECTION IV - CHART CORRECTIONS

This section contains corrections to federally and privately maintained Aids to Navigation, as well as NOS corrections.

This section contains corrective actions affecting chart(s). Corrections appear numerically by chart number, and pertain to that chart only. It is up to the mariner to decide which chart(s) are to be corrected. The following example explains individual elements of a typical chart correction.

Chart Number	Chart Edition	Edition Date	Last Local Notice to Mariners	Horizontal Datum Reference	Source of Correction	Current Local Notice to Mariners
12327	91st Ed.	19-APR-97	Last LNM: 26/97	NAD 83		27/97
Chart Title: NY-NJ-NEW YORK HARBOR - RARITAN RIVER						
Main Panel 2245 NEW YORK HARBOR					CGD01	
(Temp)	ADD	NATIONAL DOCK CHANNEL BUOY 3			at 40-41-09.001N	074-02-48.001W
		Green can				
	Corrective Action	Object of Corrective Action			Position	

(Temp) indicates that the chart correction action is temporary in nature. Courses and bearings are given in degrees clockwise from 000 true. Bearings of light sectors are toward the light from seaward. The nominal range of lights is expressed in nautical miles (NM) unless otherwise noted.

Chart Number	Chart Edition	Edition Date	Last LNM	Horizontal Datum Reference	Source of Correction	Current Local Notice to Mariners
11408	30th Ed.	01-MAR-15	Last LNM: 11/16	NAD 83		25/16
Chart Title: Crystal River to Horseshoe Point; Suwannee River; Cedar Keys						
CHART FL-CRYSTAL RIVER TO HORSESHOE POINT. Page/Side: N/A						
(Temp)	CHANGE	Withlacoochee River Entrance Daybeacon 13 TRUB			CGD07 at 28-59-03.109N	082-48-03.316W

Chart Number	Chart Edition	Edition Date	Last LNM	Horizontal Datum Reference	Source of Correction	Current Local Notice to Mariners
11429	23rd Ed.	01-OCT-10	Last LNM: 17/16	NAD 83		25/16
Chart Title: Chatham River to Clam Pass; Naples Bay; Everglades Harbor						
CHART FL-CHATHAM RIVER TO CLAM PASS. Page/Side: N/A						
	RELOCATE	Gordon Pass Channel Daybeacon 5			CGD07 from 26-05-34.447N to 26-05-34.669N	081-47-58.816W 081-47-58.890W
	RELOCATE	Gordon Pass Channel Light 9 to 5M			CGD07 from 26-05-48.051N to 26-05-48.197N	081-47-54.414W 081-47-54.304W
	RELOCATE	Naples Bay Channel Light 34 to 5M			CGD07 from 26-07-51.655N to 26-07-51.573N	081-47-30.247W 081-47-29.370W
	CHANGE	Capri Pass Light 9 to 5M			CGD07 at 25-58-19.254N	081-44-36.073W
	CHANGE	Gordon Pass Channel Light 6 to 5M			CGD07 at 26-05-33.790N	081-47-54.987W
	CHANGE	Naples Bay Channel Light 20 to 5M			CGD07 at 26-06-05.295N	081-47-11.485W
	CHANGE	Naples Bay Channel Light 24 to 5M			CGD07 at 26-06-45.994N	081-47-11.322W
	CHANGE	Naples Bay Channel Light 32 to 5M			CGD07 at 26-07-45.096N	081-47-25.594W

Chart Number	Chart Edition	Edition Date	Last LNM	Horizontal Datum Reference	Source of Correction	Current Local Notice to Mariners
11430	28th Ed.	01-NOV-15	Last LNM: 17/16	NAD 83		25/16
Chart Title: Lostmans River to Wiggins Pass						
CHART FL-LOSTMANS RIVER TO WIGGINS PASS. Page/Side: N/A						
	RELOCATE	Gordon Pass Channel Daybeacon 5			CGD07 from 26-05-34.447N to 26-05-34.669N	081-47-58.816W 081-47-58.890W
	RELOCATE	Gordon Pass Channel Light 9 to 5M			CGD07 from 26-05-48.051N to 26-05-48.197N	081-47-54.414W 081-47-54.304W
	RELOCATE	Naples Bay Channel Light 34			CGD07 from 26-07-51.655N	081-47-30.247W



CHANGE	Depth Legend - Widener to; 43 1/2 FT JUN 2015 (NOS NW-25711)	NOS 28-24-30.500N	080-34-31.800W
CHANGE	tabulation - PORT CANAVERAL CHANNEL DEPTHS <a href="http://ocsddata.ncd.noaa.gov/ntm/SupportImage.aspx?ItemID=265334">http://ocsddata.ncd.noaa.gov/ntm/SupportImage.aspx?ItemID=265334</a> ; tabulation - PORT CANAVERAL CHANNEL DEPTHS (NOS NW-25710)	NOS 28-25-37.800N	080-34-37.800W
<b>11480</b>	<b>41st Ed. 01-NOV-10 Last LNM: 25/16 NAD 83</b>		<b>25/16</b>
<i>ChartTitle: Charleston Light to Cape Canaveral</i>			
<b>Main Panel 376 CHARLESTON LIGHT TO CAPE CANAVERAL. Page/Side: N/A</b>			
ADD	Sounding in Fathoms; 7 1/4 (NOS NW-25706)	NOS 32-32-59.291N	079-40-32.524W
<b>11481</b>	<b>9th Ed. 01-OCT-14 Last LNM: 25/16 NAD 83</b>		<b>25/16</b>
<i>ChartTitle: Approaches to Port Canaveral</i>			
<b>Main Panel 323 APPROACHES TO PORT CANAVERAL. Page/Side: A</b>			
CHANGE	Depth Legend - East Basin to; 35 1/2 FT JUN 2015 (NOS NW-25711)	NOS 28-25-06.000N	080-35-44.000W
CHANGE	Depth Legend - Inner Reach to; 30 FT JUN 2015 (NOS NW-25711)	NOS 28-24-32.000N	080-35-54.000W
CHANGE	Depth Legend - Middle Basin to; 15 1/2 FT MAY 2015 (NOS NW-25711)	NOS 28-24-54.000N	080-36-30.000W
CHANGE	Depth Legend - Middle Basin to; 31 1/2 FT MAY 2015 (NOS NW-25711)	NOS 28-24-51.000N	080-36-30.000W
CHANGE	Depth Legend - Middle Basin to; 37 1/2 FT MAY 2015 (NOS NW-25711)	NOS 28-24-42.000N	080-36-32.000W
CHANGE	Depth Legend - Port Canaveral legend to; 25 FT MAY 2015 (NOS NW-25711)	NOS 28-24-33.000N	080-37-05.000W
CHANGE	Depth Legend - West Turning Basin to; 28 1/2 FT MAY 2015 (PROJECT DEPTH 35 FT) (NOS NW-25711)	NOS 28-24-49.000N	080-37-28.000W
CHANGE	Depth Legend - Widener to; 43 1/2 FT JUN 2015 (NOS NW-25711)	NOS 28-24-30.500N	080-34-31.800W
CHANGE	tabulation - PORT CANAVERAL CHANNEL DEPTHS <a href="http://ocsddata.ncd.noaa.gov/ntm/SupportImage.aspx?ItemID=265335">http://ocsddata.ncd.noaa.gov/ntm/SupportImage.aspx?ItemID=265335</a> ; tabulation - PORT CANAVERAL CHANNEL DEPTHS (NOS NW-25710)	NOS 28-27-30.000N	080-34-30.000W
<b>11484</b>	<b>24th Ed. 01-JUL-11 Last LNM: 25/16 NAD 83</b>		<b>25/16</b>
<i>ChartTitle: Ponce de Leon Inlet to Cape Canaveral</i>			
<b>Main Panel 289 PONCE DE LEON INLET TO CAPE CANAVERAL. Page/Side: N/A</b>			
CHANGE	Depth Note - Note F CANAVERAL HARBOR CHANNEL to; The project depths are 46 feet. For controlling depths use chart 11478. (NOS NW-25711)	NOS 28-28-02.220N	080-33-07.110W
<b>11485</b>	<b>37th Ed. 01-NOV-14 Last LNM: 25/16 NAD 83</b>		<b>25/16</b>
<i>ChartTitle: Intracoastal Waterway Tolomato River to Palm Shores</i>			
<b>CHART FL-ICW-TOLOMATO RIVER TO PALM SHORES. Page/Side: N/A</b>			
RELOCATE	Inlet Harbor Buoy 4	CGD07 from 29-05-01.890N to 29-05-01.825N	080-56-09.894W 080-56-10.448W
(Temp) CHANGE	Halifax River Daybeacon 14 TRUB	CGD07 at 29-18-23.544N	081-03-34.442W
(Temp) CHANGE	San Sebastian River Daybeacon 6 TRLB, "WR 6", Q R	CGD07 at 29-52-16.616N	081-18-51.262W
<b>11489</b>	<b>40th Ed. 01-FEB-15 Last LNM: 22/16 NAD 83</b>		<b>25/16</b>
<i>ChartTitle: Intracoastal Waterway St. Simons Sound to Tolomato River</i>			
<b>CHART GA-FL-ST. SIMONS ISLAND SOUND - TOLOMATO RIVER. Page/Side: N/A</b>			
(Temp) CHANGE	Tolomato River Daybeacon 7 TRUB	CGD07 at 30-05-50.649N	081-21-58.742W

<b>11518</b>	<b>38th Ed.</b>	<b>01-APR-12</b>	<b>Last LNM: 22/16</b>	<b>NAD 83</b>	<b>25/16</b>
<i>ChartTitle: Intracoastal Waterway Casino Creek to Beafort River</i>					
<b>CHART SC-ICW-CASINO CREEK TO BEAUFORT RIVER. Page/Side: N/A</b>					
RELOCATE	Winyah Bay-Charleston Harbor Daybeacon 115			CGD07 from 32-48-53.197N to 32-48-53.156N	079-45-02.960W 079-45-02.824W
<b>11520</b>	<b>45th Ed.</b>	<b>01-SEP-13</b>	<b>Last LNM: 25/16</b>	<b>NAD 83</b>	<b>25/16</b>
<i>ChartTitle: Cape Hatteras to Charleston</i>					
<b>Main Panel 377 CAPE HATTERAS TO CHARLESTON. Page/Side: N/A</b>					
ADD	Sounding in Fathoms; 7 1/4 (NOS NW-25706)			NOS 32-32-59.291N	079-40-32.524W
<b>11521</b>	<b>30th Ed.</b>	<b>01-DEC-10</b>	<b>Last LNM: 25/16</b>	<b>NAD 83</b>	<b>25/16</b>
<i>ChartTitle: Charleston Habor and Approaches</i>					
<b>Main Panel 230 CHARLESTON HARBOR AND APPROACHES. Page/Side: N/A</b>					
ADD	Sounding in Feet; 43 (NOS NW-25706)			NOS 32-32-59.291N	079-40-32.524W
<b>11528</b>	<b>1st Ed.</b>	<b>01-JUL-14</b>	<b>Last LNM: 25/16</b>	<b>NAD 83</b>	<b>25/16</b>
<i>ChartTitle: Charleston Harbor Entrance and Approach</i>					
<b>Main Panel 257 CHARLESTON HARBOR ENTRANCE AND APPROACH. Page/Side: A</b>					
ADD	Sounding in Feet; 43 (NOS NW-25706)			NOS 32-32-59.291N	079-40-32.524W
<b>25640</b>	<b>45th Ed.</b>	<b>01-JAN-13</b>	<b>Last LNM: 25/16</b>	<b>NAD 83</b>	<b>25/16</b>
<i>ChartTitle: Puerto Rico and Virgin Islands</i>					
<b>Main Panel 414 PUERTO RICO AND VIRGIN ISLANDS. Page/Side: N/A</b>					
CHANGE	Arecibo Light to 11M			CGD07 at 18-28-55.076N	066-41-55.335W
CHANGE	Cabo Rojo Light to 11M			CGD07 at 17-56-00.900N	067-11-32.000W
<b>25668</b>	<b>21st Ed.</b>	<b>01-NOV-12</b>	<b>Last LNM: 25/16</b>	<b>NAD 83</b>	<b>25/16</b>
<i>ChartTitle: North Coast of Puerto Rico Punta Penon to Punta Vacia Talega;Puerto Arecibo;Puerto Palmas Altas</i>					
<b>CHART PR-PUNTA PENON TO PUNTA VACIA TALEGA. Page/Side: N/A</b>					
CHANGE	Arecibo Light to 11M			CGD07 at 18-28-55.076N	066-41-55.335W
<b>25671</b>	<b>19th Ed.</b>	<b>01-JUL-11</b>	<b>Last LNM: 25/16</b>	<b>NAD 83</b>	<b>25/16</b>
<i>ChartTitle: West Coast of Puerto Rico</i>					
<b>Main Panel 406 WEST COAST OF PUERTO RICO. Page/Side: N/A</b>					
CHANGE	Cabo Rojo Light to 11M			CGD07 at 17-56-00.900N	067-11-32.000W

---

### SECTION V - ADVANCE NOTICES

This section contains advance notice of approved projects, changes to aids to navigation, or upcoming temporary changes such as dredging, etc.  
Mariners are advised to use caution while transiting these areas.

#### SUMMARY OF ADVANCED APPROVED PROJECTS

<u>Approved Project(s)</u>	<u>Project Date</u>	<u>Ref. LNM</u>
None		

Advance Notice(s)

#### SOUTH CAROLINA – CHARLESTON HARBOR AND SURROUNDING WATERWAYS

The Coast Guard is conducting a Waterway Analysis and Management System (WAMS) study of Charleston Harbor and the surrounding waterways. The study focuses on the area's aid to navigation systems, waterborne commerce, marine casualty information, port/harbor resources, and future development projects. Any interested company or individual wishing to provide comments or participate in a user survey should use the following

link: <https://www.surveymonkey.com/r/CharlestonHarborWAMS> or  
contact: Commander, Sector Charleston: Prevention Department, 196 Tradd St., Charleston, SC 29401, Attn: LT John Downing at (843) 740-3184.  
E-mail to [john.z.downing@uscg.mil](mailto:john.z.downing@uscg.mil). The comment period will end on 01 August, 2016.

Charts: 11524 11527 11528 LNM: 23/16

**SEACOAST – FLORIDA – BETHEL SHOAL TO JUPITER INLET**

The following changes have been proposed to the Aids to Navigation System off the Florida coast:

Capron Shoal Buoy 10A (LLNR 680) will be permanently discontinued  
Chart 11474 LNM: 25/16

**STRAITS OF FLORIDA – FOWEY ROCKS TO ALLIGATOR REEF**

The following change has been approved to the Aids to Navigation system in the Straits of Florida:

Pacific Reef Light (LLNR 935) optic to be upgraded to a more reliable LED (Light-emitting diode) lantern and the nominal range reduced to 7NM.  
Charts: 411 11013 11450 11460 11462 11465 11466 11469 LNM: 33/14

**STRAITS OF FLORIDA – ALLIGATOR REEF TO SOMBRERO KEY**

The following changes have been approved to the Aids to Navigation system in the Straits of Florida: Ref: LNM 51/15

Tennessee Reef Light (LLNR 990) optic to be upgraded to a more reliable LED (Light-emitting diode) lantern and the nominal range reduced to 7NM

Charts: 411 11013 11420 11449 11450 11460 11462 LNM: 33/14

**STRAITS OF FLORIDA – ALLIGATOR REEF TO SOMBRERO KEY-TENNESSEE REEF**

The following change has been approved to the Aids to Navigation system in the Straits of Florida:

Change Coffins Patch Light 20 (LLNR 995) from 6NM nominal range to 5NM nominal range  
Charts: 11420 11449 11450 11451 11452 11453 11460 LNM: 45/15

**GULF OF MEXICO – FLORIDA – CRYSTAL RIVER TO HORSESHOE**

The following changes have been proposed to the Aids to Navigation System in the Gulf of Mexico:

Cross Florida Barge Canal Approach Lighted Buoy 2 (LLNR 1610) will be permanently discontinued  
Chart 11408 LNM: 25/16

**GEORGIA – SAVANNAH RIVER – CITY FRONT CHANNEL**

The following change has been approved to the Aids to Navigation System in the Savannah River:

City Front Channel Light 62 (LLNR 5025) will be permanently discontinued  
Chart 11514 LNM: 21/16

**FLORIDA - AMELIA ISLAND TO ST AUGUSTINE - JACKSONVILLE: JACKSONVILLE OFFSHORE ANCHORAGE**

The Coast Guard has approved the following change to the anchorage area encompassed within the following points: starting at Point 1 in position 30°29.08'N, 81°18.21'W; thence south to Point 2 in position 30°26.06' N, 81°18.21'W; thence east to Point 3 in position 30°26.06'N, 81°16.05'W; thence north to Point 4 in position 30°29.08'N, 81°16.05'W; thence west back to origin. All coordinates are North American Datum 1983.

Chart 11488 LNM: 16/16

**FLORIDA - ST JOHNS RIVER - LONG BRANCH: TERMINAL CHANNEL SPECIAL PURPOSE BUOYS**

The following change has been approved to the Aids to Navigation system in the St Johns River by adding three yellow special purpose buoys along the 32ft curve at the junction of the Long Branch and Terminal Channels to assist with the maneuvering of large vessels into the Talleyrand Marine Terminal.

Chart 11491 LNM: 11/15

**FLORIDA – PORT CANAVERAL HARBOR – CANAVERAL HARBOR**

The Coast Guard has approved the following change to the Aids to Navigation system in Port Canaveral Harbor, due to new channel characteristics based off the Army Corps of Engineers dredging project. The following are the approved changes:

- Completed - Ref: LNM 21/16
- Canaveral Harbor Approach Channel LB 9 (LLNR 9615) with FI 2.5s, 5M characteristics and relocated to 28-24-08.144N/080-33-58.351W
- Canaveral Harbor Entrance Channel LB 11 (LLNR 9640) with FI Q G, 4M characteristics and relocated to 28-24-21.185N/080-34-20.712W
- Canaveral Harbor Entrance Channel LB 13 (9650) relocated to 28-24-29.396N/080-34-46.001W

- Canaveral Harbor Entrance Channel LB 14A (LLNR 9685.5) relocated to 28-24-38.348N/080-36-09.141W
- Canaveral Harbor Entrance Channel LB 15 (LLNR 9690) on AP.
- Canaveral Harbor Entrance Channel LB 19 (LLNR 9705) relocated to 28-24-32.792N/080-37-14.173W

Completed - Ref: LNM 20/16

- East Basin Light 2 (LLNR 9670) relocated and renamed Canaveral Harbor Entrance Channel Light 12A with FI R 2.5s characteristics and 5NM in position 28-24-38.720N/080-35-21.704W
- Canaveral Harbor Entrance Channel Lighted Buoy 12 (LLNR 9645) relocated to 28-24-37.819N/080-35-01.529W
- Canaveral Harbor Entrance Channel Light 14 (LLNR 9655) with FI R 4s characteristics and 5NM relocated to 28-24-38.820N/080-35-36.984W

Additionally, the Canaveral Harbor Entrance Channel Ranges will be converted to LED optics, converted to a 24 hr, day-night range, dayboards removed, and relocated to the following positions:

Relocate Canaveral Harbor Entrance Channel Range Front Light (LLNR 9630) to position: 28 24' 35.79"N / 080 37' 36.82"W. The light characteristics will be changed to FI G 2.5s

Relocate Canaveral Harbor Entrance Channel Range Rear Light (LLNR 9635) to position: 28 24' 35.91"N / 080 38' 02.58"W. The light characteristics will remain Iso G 6s

Chart 11478 LNM: 16/16

**FLORIDA – ST JOHNS RIVER – LAKE GEORGE**

The following changes have been approved to the Aids to Navigation system in the St Johns River – Lake George:

Lake George South End Range Front Light (LLNR 8775) to Lake George Light14 displaying FI R 2.5s, 5NM, TR on a pile (lateral aid)

Lake George South End Range Rear Light (LLNR 8780) will be permanently discontinued

Chart 11495 LNM: 51/14

**FLORIDA – EVERGLADES NATIONAL PARK**

The following change has been approved to the aids to navigation system in the Everglades National Park.

The U.S. Coast Guard will permanently discontinue the following aids to navigation in the Everglades National Park region.

**CORMORANT PASS**

- Cormorant Pass DBN 44 (LLNR 15855)
- Cormorant Pass DBN 45 (LLNR 15860)
- Cormorant Pass Buoy 47 (LLNR 15865)

**OYSTER BAY**

- Oyster Bay DBN 50 (LLNR 15875)
- Oyster Bay DBN 55 (LLNR 15890)
- Oyster Bay DBN 57 (LLNR 15895)
- Oyster Bay DBN 59 (LLNR 15900)

**LITTLE SHARK RIVER**

- Little Shark River DBN 64 (LLNR 15920)
- Little Shark River DBN 65 (LLNR 15925)
- Little Shark River DBN 67 (LLNR 15930)
- Little Shark River DBN 68 (LLNR 15935)
- Little Shark River DBN 70 (LLNR 15945)

Chart 11433 LNM: 44/15

**WEST INDIES – PUERTO RICO – PUNTA PENON TO PUNTA TALEGA**

The following change has been approved to the Aids to Navigation system in Puerto Rico:

Arecibo Light (LLNR 30720) will have an optic upgrade to a more reliable LED (Light-emitting diode) lantern. The light will display the published characteristics with a reduction in nominal range to 11NM.

Chart 25668 LNM: 40/15

**WEST INDIES – PUERTO RICO – BAHIA DE SAN JUAN**

The Coast Guard has approved the following changes to the Aids to Navigation System in Bahia De San Juan.

- Bahia De San Juan Lighted Buoy 2 (LLNR 30760) will be changed from FI R 2.5s to FI R 4s.
- Bahia De San Juan Lighted Buoy 3 (LLNR 30765) will be changed from FI G 2.5s to FI G 4s.

Bahia De San Juan Lighted Buoy 4 (LLNR 30770) will be changed from FI R 6s to FI R 2.5s.  
Bahia De San Juan Lighted Buoy 5 (LLNR 30775) will be changed from FI G 6s to FI G 2.5s.

Chart 25670

LNM: 16/16

**WEST INDIES – PUERTO RICO – EAST COAST– BAHIA DE FAJARDO TO PUERTO YABUCOA WAMS STUDY**

The Coast Guard is conducting a Waterway Analysis and Management System (WAMS) study of the East Coast of Puerto Rico from Bahia de Fajardo to Puerto Yabucoa, to include the islands of Culebra and Vieques. The study focuses on the area's aid to navigation system, waterborne commerce, marine casualty information, port/harbor resources, emergency response plans, communication capabilities and future development projects. Any interested company or individual wishing to provide comments or participate in a user survey should use the following link: <https://www.surveymonkey.com/r/PReastcoast> or contact: Commander, Sector San Juan, 5 Calle La Puntilla, San Juan, PR, 00901, Attn: BMC Francis Kinsey at (787) 289-2073. E-mail to [francis.s.kinsey@uscg.mil](mailto:francis.s.kinsey@uscg.mil). The comment period will end on 05 July, 2016.

Charts: 25650 25653 25654 25655 25659 25661 25663 25664 25665 25666 25667

LNM: 15/16

**WEST INDIES – PUERTO RICO – BAHIA DE FAJARDO AND APPROACHES**

The following change has been approved to the Aids to Navigation system in Puerto Rico:

Cabo San Juan Light (LLNR 31155) will have an optic upgrade to a more reliable LED (Light-emitting diode) lantern. The light will display the published characteristics with a reduction in nominal range to 11NM.

Chart 25667

LNM: 49/13

**WEST INDIES – PUERTO RICO – BAHIA DE PONCE AND APPROACHES (CHANGE: October 22, 2015)**

The following change has been approved to the Aids to Navigation system in Puerto Rico:

Isla Caja De Muertos Light (LLNR 31925) will have an optic upgrade to a more reliable LED (Light-emitting diode) lantern. The light will display the published characteristics with an no change in the nominal range of 10NM. (Ref: LNM 43/15)

Chart 25683

LNM: 40/15

**WEST INDIES – ST. CROIX – CHRISTIANSTED HARBOR:**

The following change has been approved to the Aids to Navigation system in Christiansted Harbor Channel.

Lighted Buoy 12 (LLNR 32925) will be relocated 25 yards WNW to position 17-45-16.9N, 064-42-01.9W. This change is based on waterway user needs to better mark edge of the channel.

Chart 25645

LNM: 42/15

**SOUTH CAROLINA – AICW– MYRTLE GROVE SOUND AND CAPE FEAR TO CASINO CREEK– LITTLE RIVER – WINYAH BAY**

The following change has been approved to the Aids to Navigation System in the Little River:

Little River-Winyah Bay Daybeacon 27 (LLNR 33750) will be permanently discontinued

Chart 11534

LNM: 21/16

**SOUTH CAROLINA - AICW - CASINO CREEK TO BEAUFORT RIVER - WINYAH BAY- CHARLESTON HARBOR**

The following change has been approved to the Aids to Navigation System in Winyah Bay:

Winyah Bay-Charleston Harbor Daybeacon 73 (LLNR 34355) will be permanently discontinued

Chart 11518

LNM: 21/16

**FLORIDA – FORT MYERS TO CHARLOTTE HARBOR AND WIGGINS PASS WAMS STUDY (UPDATE: Comment Period)**

The Coast Guard is conducting a focused Waterway Analysis and Management System (WAMS) study of the mooring area adjacent to Fort Myers Beach. The study focuses on the area's managed mooring field, aid to navigation system, waterborne commerce, marine casualty information, port/harbor resources, and future development projects. Any interested company or individual wishing to provide comments or participate in a user survey should use the following link: <https://www.surveymonkey.com/r/FortMyersBeachAnchorage> or contact:

Commander, Sector St. Petersburg, 600 8th Ave, S.E. St. Petersburg, FL 33701, Attn: BOSN Darren Pauly at (813) 228-2191, ext. 8184. E-mail to [darren.a.pauly@uscg.mil](mailto:darren.a.pauly@uscg.mil). The comment period will end on 31 July, 2016.

Chart 11427

LNM: 21/16

**FLORIDA – GIWW - TAMPA BAY TO PORT RICHEY – BOCA CIEGA BAY TO ANCLOTE ANCHORAGE**

The following changes have been approved to the Aids to Navigation system in Boca Ciega Bay to Anclote Anchorage:

The Narrows Daybeacon 3 (LLNR 61485) will be permanently discontinued

The Narrows Daybeacon 4 (LLNR 61490) will be permanently discontinued

Chart 11411

LNM: 51/14

---

---

## SECTION VI - PROPOSED CHANGES

Periodically, the Coast Guard evaluates its system of aids to navigation to determine whether the conditions for which the aids to navigation were established have changed. When changes occur, the feasibility of improving, relocating, replacing, or discontinuing aids are considered. This section contains notice(s) of non-approved, proposed projects open for comment. SPECIAL NOTE: Mariners are requested to respond in writing to the District office unless otherwise noted (see banner page for address).

---

### PROPOSED WATERWAY PROJECTS OPEN FOR PUBLIC COMMENT

<u>Proposed Project(s)</u>	<u>Closing</u>	<u>Docket No.</u>	<u>Ref. LNM</u>
None			

#### Proposed Change Notice(s)

##### **WEST INDIES – PUERTO RICO – BAHIA DE SAN JUAN: Potentially Abandoned Private Aids to Navigation.**

The following Private Aids to Navigation are discrepant and the owner of record is unresponsive. It is a condition of the Coast Guard authorization for Private Aids to Navigation to keep current contact information on file with the Coast Guard District Waterways Management office. The Seventh District Commander is seeking information to establish current ownership of these aids. If ownership cannot be established within 45 days from the publication of this notice, these aids will be considered abandoned and will be required to be removed.

Please contact the Seventh Coast Guard District, Waterways Management Branch, Private Aids to Navigation Coordinator at (305) 415-6751 if you have contact information for the current owner of these aids.

TMT Outer Dolphin Obstruction Light (LLNR 30825) in position 18-27-03.804N/066-06-11.598W  
TMT Middle Dolphin Obstruction Light (LLNR 30830) in position 18-27-03.804N/066-06-11.598W

Chart 25670

LNM: 19/16

##### **WEST INDIES - PUERTO RICO: ADDING AIS SYNTHETICS**

The U.S. Coast Guard is proposing to add an AIS Synthetic ATON mark to the following aids in the Sector San Juan AOR. The synthetic ATON would provide another resource to the mariner transiting these areas in the event a hurricane destroyed the physical aid. Ref: LNM 48/15

WEST INDIES – PUERTO RICO – BAHIA DE GUAYANILLA AND BAHIA DE TALLABOA – BAHIA DE TALLABOA, Chart: 25681

Bahia de Tallaboa Buoy 2 (LLNR 32010)

Bahia de Tallaboa Lighted Buoy 5 (LLNR 32020)

WEST INDIES – PUERTO RICO – BAHIA DE GUAYANILLA AND BAHIA DE TALLABOA – PPG INDUSTRIES, Chart: 25681

Bahia De Guayanilla Entrance Range Front Passing Light (LLNR 32070.5)

WEST INDIES – PUERTO RICO – BAHIA DE GUAYANILLA AND BAHIA DE TALLABOA – BAHIA DE GUAYANILLA, Chart: 25681

Bahia De Guayanilla Entrance Range Rear Light (LLNR 32075)

Bahia De Guayanilla Entrance Lighted Buoy 2 (LLNR 32085)

Bahia De Guayanilla Entrance Lighted Buoy 3 (LLNR 32090)

WEST INDIES – PUERTO RICO – BAHIA DE GUANICA, Chart: 25679

Bahia De Guanica Range Front Light (LLNR 32215)

Bahia De Guanica Range Rear Light (LLNR 32220)

LNM: 31/15

##### **SOUTH CAROLINA – AICW – BEAUFORT RIVER TO ST SIMONS SOUND: Potentially Abandoned Private Aid to Navigation.**

The following Private Aids to Navigation are discrepant and the owner of record is unresponsive. It is a condition of the Coast Guard authorization for Private Aids to Navigation to keep current contact information on file with the Coast Guard District Waterways Management office. The Seventh District Commander is seeking information to establish current ownership of these aids. If ownership cannot be established within 45 days from the publication of this notice, these aids will be considered abandoned and will be required to be removed.

Please contact the Seventh Coast Guard District, Waterways Management Branch, Private Aids to Navigation Coordinator at (305) 415-6751 if you have contact information for the current owner of these aids.

Ribaut Island Dock Light G (LLNR 35630) in position 32-16-00.000N/080-44-13.000W Light located on Pier; Extinguished

Ribaut Island Dock Light A (LLNR 35630) in position 32-16-00.000N/080-44-13.000W Light located on Pier; Extinguished

Ribaut Island Dock Light C (LLNR 35630) in position 32-16-00.000N/ 080-44-13.000W Light located on Pier; Extinguished

Chart 11507

LNM: 19/16

##### **FLORIDA – AICW – WEST PALM BEACH TO MIAMI - ENTRADA CHANNEL: Potentially Abandoned Private Aids to Navigation.**

The following Private Aids to Navigation are discrepant and the owner of record is unresponsive. It is a condition of the Coast Guard authorization for Private Aids to Navigation to keep current contact information on file with the Coast Guard District Waterways Management office. The Seventh District Commander is seeking information to establish current ownership of these aids. If ownership cannot be established within 45 days from the publication of this notice, these aids will be considered abandoned and will be required to be removed. Please contact

the Seventh Coast Guard District, Waterways Management Branch, Private Aids to Navigation Coordinator at (305) 415-6751 if you have contact information for the current owner of these aids.

Entrada Channel Daybeacon 1(LLNR 49240) Hazard to Navigation  
Entrada Channel Daybeacon 3(LLNR 49245) Hazard to Navigation  
Entrada Channel Daybeacon 5 (LLNR 49250) Hazard to Navigation  
Entrada Channel Daybeacon 7 (LLNR 49255) Hazard to Navigation  
Entrada Channel Daybeacon 9 (LLNR 49260) Hazard to Navigation

Chart 11467

LNLM: 25/16

**FLORIDA – AICW – PALM SHORES TO WEST PALM BEACH – CHANNEL 68 MARINA: Potentially Abandoned Private Aids to Navigation.**

The following Private Aid to Navigation is discrepant and the owner of record is unresponsive. It is a condition of the Coast Guard authorization for Private Aids to Navigation to keep current contact information on file with the Coast Guard District Waterways Management office. The Seventh District Commander is seeking information to establish current ownership of this aid. If ownership cannot be established within 45 days from the publication of this notice, these aids will be considered abandoned and will be required to be removed. Please contact the Seventh Coast Guard District, Waterways Management Branch, Private Aids to Navigation Coordinator at (305) 415-6751 if you have contact information for the current owner of these aids.

Channel 68 Marina DBN 2 (LLNR 43685.2) Daymark Missing

Chart 11472

LNLM: 25/16

**FLORIDA – AICW – TOLOMATO RIVER TO PALM SHORES – BANANA RIVER**

The U.S. Coast Guard is proposing to convert the fixed aids in the Banana River, south of the Canaveral Barge Canal, to floating aids. The current water depths prohibit the assigned maintenance vessel from repairing damage to the fixed piles. Upon becoming discrepant, these aids will be replaced with floating aids displaying similar characteristics.

All comments should be emailed to: D07-SMB-DPWPublicComments@uscg.mil with Banana River Proposed Changes as the subject line. Comments can also be mailed to Commander (DPW), Seventh Coast Guard District 909 SE 1st Avenue (STE 406) Brickell Federal Plaza Bldg Miami FL 33131.

Chart 11485

LNLM: 24/16

**FLORIDA - AICW - CHARLOTTE HARBOR TO TAMPA BAY - FISHERY RESTAURANT CHANNEL: Potentially Abandoned Private Aid to Navigation.**

The following Private Aids to Navigation are discrepant and the owner of record is unresponsive. It is a condition of the Coast Guard authorization for Private Aids to Navigation to keep current contact information on file with the Coast Guard District Waterways Management office. The Seventh District Commander is seeking information to establish current ownership of these aids. If ownership cannot be established within 45 days from the publication of this notice, these aids will be considered abandoned and will be required to be removed.

Please contact the Seventh Coast Guard District, Waterways Management Branch, Private Aids to Navigation Coordinator at (305) 415-6751 if you have contact information for the current owner of these aids.

Fishery Restaurant Daybeacon 1 (LLNR 56655) in position 26-49-37.000N/082-16-00.000W  
Fishery Restaurant Daybeacon 2 (LLNR 56660) in position 26-49-37.000N/082-15-59.000W  
Fishery Restaurant Daybeacon 3 (LLNR 56665) in position 26-49-41.000N/082-15-59.000W  
Fishery Restaurant Daybeacon 5 (LLNR 56670) in position 26-49-44.000N/082-15-57.000W  
Fishery Restaurant Daybeacon 7 (LLNR 56675) in position 26-49-48.000N/082-15-56.000W  
Fishery Restaurant Daybeacon 8 (LLNR 56680) in position 26-49-48.000N/082-15-54.500W  
Fishery Restaurant Daybeacon 10 (LLNR 56685) in position 26-49-49.500N/082-15-54.500W

Chart 11425

LNLM: 19/16

**FLORIDA - AICW - CHARLOTTE HARBOR TO TAMPA BAY - SIESTA KEY - TAMPA BAY: Potentially Abandoned Private Aids to Navigation.**

The following Private Aids to Navigation are discrepant and the owner of record is unresponsive. It is a condition of the Coast Guard authorization for Private Aids to Navigation to keep current contact information on file with the Coast Guard District Waterways Management office. The Seventh District Commander is seeking information to establish current ownership of these aids. If ownership cannot be established within 45 days from the publication of this notice, these aids will be considered abandoned and will be required to be removed.

Please contact the Seventh Coast Guard District, Waterways Management Branch, Private Aids to Navigation Coordinator at (305) 415-6751 if you have contact information for the current owner of these aids.

Palma Sola Park Channel Daybeacon 2 (LLNR 59895) Daymark damage (LNLM 24/2009)

Chart 11425

LNLM: 20/16

**FLORIDA – ANCLOTE KEYS TO CRYSTAL RIVER - HOMOSASSA BAY AND HOMOSASSA RIVER WAMS STUDY (UPDATE: May 31, 2016)**

The U.S. Coast Guard is conducting a Waterway Analysis and Management System (WAMS) review of Homosassa Bay and Homosassa River. The study focuses on the area's aids to navigation, waterborne commerce, marine casualty information, port/harbor resources, emergency response plans, routing and emergency communication capabilities, and future development projects. Any interested company or individual wishing to provide recommendations on existing or additional aids to navigation in this area should be received no later than 30 June, 2016 to be considered. Please follow this link for an online survey for this waterway:  
<https://www.surveymonkey.com/r/HomosassaBayandRiver>

Send comments to:  
U.S. Coast Guard Sector St. Petersburg  
Attn: CWO Darren Pauly  
Prevention Department  
Waterways Management  
155 Columbia Dr.  
Tampa, FL 33606  
Phone: (813) 228-2191 ext. 8184  
Email: darren.a.pauly@uscg.mil

Chart 11409

LNM: 15/16

---

**SECTION VII - GENERAL**

This section contains information of general concern to the Mariners. Mariners are advised to use caution while transiting these areas.

---

**STRAITS OF FLORIDA - FOWEY ROCKS TO ALLIGATOR REEF: Hazard to Navigation (UPDATE: September 10, 2015)**

The U.S. Coast Guard received a report in 2013 of a S/V allision with Pacific Reef Light (LLNR 935). \*\*The vessel was located approximately 250 yards west of the structure and has 6ft of mast protruding above the water. \*\*The area surrounding the structure is a hazard to navigation. Mariners are urged to avoid the area. (Ref: LNM 50/13, 37/15)

Pacific Reef Light (LLNR 935) is extinguished. The aid was deemed unsafe to climb due to severe deterioration to the structure and ladder. A Temporary Light (TRLT) with FI Q W characteristics, with a 4NM range was placed on the NE corner of the aid approximately 8ft above the waterline. The TRLT may not be visible from certain angles depending on the mariners approach. Mariners are advised to use extreme caution while transiting the area. Ref: LNM 32/15

Chart 11462

LNM: 50/13

**STRAITS OF FLORIDA AND APPROACHES-STRAITS OF FLORIDA: Flows through the Straits of Florida, (7) Underwater Research Mooring Buoys, 2012-2015 (Hazard to Navigation) UPDATE: February 16, 2016 Recovery/Redeployment - 7/16/2016**

The U.S. Department of State Bureau of Oceans and International Environmental and Scientific Affairs have approved the install of (7) Research Mooring Buoys stretching roughly from the Florida Keys to Cuba. Moorings labeled EFL5, EFL6 and EFL7 fall within the US Exclusive Economic Zone. The program aimed at measuring the flows between Cuba and Florida. The Research Vessel B/O Justo Sierra will be conducting marine scientific research studying the measurement of inflows/outflows of the Gulf and currents/temperatures. The research apparatus is anchored by a 2000lb weight and held vertical by a flotation balloon at 130ft below the surface. The buoys will remain in position through 2015. Mariners are to avoid close proximity, or any other interference of these buoy's data gathering function.

All (7) EFL Research Instrumented Mooring Buoys are listed below with updated position information as of July 2016. (Ref: LNM 07/16)

Mooring Name/Position:  
(EFL1) 23-18.988N 081-05.951W  
(EFL2) 23-30.008N 081-08.873W  
(EFL3) 23-40.284N 081-11.741W  
(EFL4) 23-50.047N 081-14.562W  
(EFL5) 24-01.391N 081-17.619W  
(EFL6) 24-13.059N 081-21.980W  
(EFL7) 24-24.111N 081-23.776W

LNM: 43/12

**STRAITS OF FLORIDA-FOWEY ROCKS TO ALLIGATOR REEF-THE ELBOW: Hazard to Navigation. (UPDATE: January 26, 2015)**

Elbow Reef Light (LLNR 950) is extinguished and missing all daymarks. The aid is deemed unsafe to climb due to severe deterioration to the structure and the ladder. A Temporary Light (TRLT) with FI Q W characteristics has been affixed to the damaged structure approximately 15 ft above the waterline, with a decrease in nominal range to 4 NM. The TRLT may not be visible from certain angles depending on the mariners approach. Mariners are advised to exercise extreme caution while transiting the area.  
Ref: LNM 04/16

Chart 11462

LNM: 09/14

**GULF OF MEXICO - FLORIDA – LEMON BAY TO PASSAGE KEY INLET - NEW PASS IN SARASOTA COUNTY.**

The U.S. Coast Guard has temporarily removed all Federal Aids to Navigation from the NEW PASS ENTRANCE LIGHT NP (LLNR 1345/21585) to NEW PASS LIGHT 7 (LLNR 21620)

NEW PASS ENTRANCE LIGHT NP (LLNR 1345/21585) has been temporarily discontinued and renamed NEW PASS SHOAL LIGHT and converted to a Danger Shoal marker with an FI Q W light and 3NM.

NEW PASS CHANNEL LIGHT 7 (21620) has been temporarily discontinued and renamed NEW PASS INTERIOR SHOAL LIGHT and converted to a Danger Shoal marker with an FI Q W light and 3NM.

The increased shoaling has created an unsafe situation and the U.S. Coast Guard can no longer mark "SAFE WATER". The following aids have been temporarily discontinued:

- NEW PASS CHANNEL BUOY 1 (21590)
- NEW PASS CHANNEL BUOY 2 (21595)
- NEW PASS CHANNEL BUOY 3A (21600)
- NEW PASS CHANNEL BUOY 4 (21603)
- NEW PASS CHANNEL BUOY 5 (21605)
- NEW PASS CHANNEL BUOY 5A (21610)

THE ENTRANCE CHANNEL IS SUBJECT TO CONTINUAL CHANGE. BUOYS ARE BEING REMOVED DUE TO INSUFFICIENT WATER. MARINERS ARE ADVISED TO AVOID NEW PASS AND SEEK ALTERNATE ROUTES TO AND FROM THE GULF OF MEXICO AND USE EXTREME CAUTION WHILE IN THIS AREA. FOLLOWING SUMMER DREDGE OPERATIONS, THE U.S. COAST GUARD WILL RETURN THE AIDS TO NAVIGATION BACK TO THEIR ASSIGNED POSITIONS.

Charts: 11424 11425

LNM: 13/16

**SOUTH CAROLINA – CHARLESTON ENTRANCE – CHARLESTON HARBOR: AtoN Relocation.**

Beginning on March 30, 2016, in preparation for the Army Corps of Engineers maintenance dredging project within the Charleston Harbor Entrance channel, the USCGC MARIA BRAY will be temporarily relocating the six buoys listed below. The buoys will be relocated approximately 30 yards outside of the channel from their original assigned position. All buoys will be returned to their normal assigned position following the completion of the dredging project, projected to be May 31, 2016.

- Charleston Harbor Channel Lighted Buoy 13 (LLNR 2400.2)
- Charleston Harbor Channel Lighted Buoy 14 (LLNR 2400.5)
- Charleston Harbor Channel Lighted Buoy 15 (LLNR 2405)
- Charleston Harbor Channel Lighted Buoy 16 (LLNR 2410)
- Charleston Harbor Channel Lighted Buoy 17 (LLNR 2415)
- Charleston Harbor Channel Lighted Bell Buoy 18 (LLNR 2420)

For further information, contact U.S. Coast Guard Sector Charleston Waterways Management Division at: (843) 740-3188 or our 24-hour Command Center Line at (843) 740-7050.

Charts: 11521 11528

LNM: 13/16

**SOUTH CAROLINA – CHARLESTON – ASHLEY RIVER: Dredge Operations.**

Marcol Dredging has commenced dredging operations in the vicinity of the Citadel's Boating Facility located on the Ashley River approximately 1 mile east of Hwy. 17 Ashley River Bridge. The Dredge CAPTAIN LEO will be pumping dredged sediments, via pipeline, to the Citadel's Upland Confined Disposal Facility. Dredging will continue 24 hours per day, 7 days per week until approximately, June 30, 2016. Mariners are urged to use caution while transiting the area. For on-scene communications, contact the dredge CAPTAIN LEO on VHF-FM channels 67 & 16. For more details, contact Marcol Dredging at: (843) 747-2177. For U.S. Coast Guard related issues contact Sector Charleston Waterways Management Division at: (843) 740-3188 or our 24-hour Command Center Line at: (843) 740-7050.

Chart 11524

LNM: 16/16

**SOUTH CAROLINA – CHARLESTON HARBOR - COOPER RIVER: Dredging of the Hugh K. Leatherman Terminal.**

Marinex Construction, Inc. will commence dredging operations with the Dredge SAVANNAH on or about May 8, 2016 in the vicinity of Daniel Island Reach, within the Cooper River at the Hugh K. Leatherman, SR. Terminal, Charleston, in the vicinity of Copper River Lighted Buoy 48 (LLNR 2765) and Lighted Buoy 49 (LLNR 2803). The dredge will continue on a 24 hour per day, 7 days per week basis until approximately September 30, 2016. The dredge will monitor VHF radio channels 13 & 16. Further information contact Marinex (843) 722-9083.

Chart 11524

LNM: 19/16

**GEORGIA – SAVANNAH RIVER - OGLETHORPE RANGE: Maintenance Dredge Operations in Savannah Harbor and Brunswick Inner Harbor (UPDATE: May 31, 2016)**

Marinex Construction will commence dredge operations with Dredge HAMPTON ROADS on or about April 6, 2016. Operations have moved towards Oglethorpe Range in Savannah River in the vicinity of Fig Island Jetty LB 54 (LLNR 5000) and LT 56 (LLNR 5005). Operations will continue on a 24 hour per day, 7 days per week basis until approximately 08 July, 2016. Further information contact Marinex at (843) 722-9083. (Ref: LNM 22/16, 23/16)

Chart 11512

LNM: 15/16

**GEORGIA - ALTAMAHA SOUND - HAMPTON RIVER: Hazard to Navigation.**

-Hampton River Daybeacon 11 (LLNR 5970) is destroyed. Wreckage has been marked with a TRLB, FI Q G in position 31-14-13.411N/081-19-

**GEORGIA - ALTAMAHA SOUND - HAMPTON RIVER: Hazard to Navigation.**

24.131W.

-Hampton River Daybeacon 23 (LLNR 6015) is destroyed. Wreckage has been marked with a TRLB, FI Q G in position 31-18-00.631N/081-22-24.397W (Ref: LNM 52/15)

The piles may pose a hazard to navigation. Mariners are advised to transit the area with extreme caution.

Chart 11508

LNM: 44/15

**GEORGIA - ST ANDREW SOUND AND SATILLA RIVER: Hazard to Navigation.**

Satilla River Light 6 (LLNR 6445) is destroyed. The Multi-pile wood structure is a hazard to navigation. Piles are approximately 3ft above the water. Wreckage is marked with a TRLB, FI Q R, 3M characteristics in temporary position 30-59-24.220N/081-27-57.796W. Mariners are advised to use extreme caution while transiting the area.

Chart 11504

LNM: 24/16

**FLORIDA – ST JOHNS RIVER - JACKSONVILLE HARBOR: Mile Point Training Wall Reconfiguration.**

Manson Construction will commence dredge operations on or about November 30, 2015 adjacent to the intersection of the St. Johns River and the Intracoastal Waterway. Initially, marine excavation and construction will be taking place with a barge mounted excavator and a crane barge at Great Marsh Island. In February 2016, the Dredge BECHTOLT will commence dredging the main dredge area located next to the little jetties and Helen Cooper Floyd Park. This work will last until September 2016 where material will be transported into the Great Marsh Island Placement Area across the Intracoastal Waterway. All of these plants will be working on VHF channel 60 and monitoring channel 13. Further information contact: Charles Markham – Project Engineer – (904) 524-7646, Patrick Kenning - General Superintendent – (904) 504-5426, Cole Reardon – Asst. Superintendent – (904) 576-1996. For Coast Guard related issues contact Sector Jacksonville Waterways Management Division at (904) 714-7618.

Chart 11491

LNM: 47/15

**FLORIDA – ST JOHNS RIVER – JACKSONVILLE - Blount Island: Berth Demolition and Construction.**

Mariners are advised to use caution when transiting in vicinity of JAXPORT's Blount Island Berths 34 and 35 on the St Johns River, Jacksonville beginning February 2015 through October 2016. These berths are currently undergoing reconstruction and will have construction barges alongside to complete this project. For the safety of the construction personnel working on these berths, caution and safe speed is requested while transiting the area. For Coast Guard related issues contact Sector Jacksonville Waterways Management Division at (904) 714-7618.

Chart 11491

LNM: 09/15

**FLORIDA - PORT CANAVERAL HARBOR - EAST BASIN: Shoal.**

A shoal was reported in position 28-24.600N 080-35.500W near the entrance to the Trident East Basin in Port Canaveral. The shoaling is approximately 1ft below the required 43ft project depth. The US Navy is working with the Army Corps of Engineers and local dredge companies to dredge the shallow areas. Mariners are advised to exercise caution while transiting the area.

Chart 11476

LNM: 23/16

**FLORIDA – CAPE CANAVERAL – PORT CANAVERAL: Dolphin/Pier Demolition.**

Vortex Marine Construction, Inc. will commence demolition work on the Port Canaveral North Cargo Pier 2 on approximately March 7, 2016 through May 26, 2016. The work includes diving, demolition and air lifting under and near the pier face. Mariners are advised to use caution while transiting the area. The location will be marked with work boats, "COTTONMOUTH" push boat, "MOBRO 302" barge and dive flags to mark the location of divers. Further information contact the Project Manager Jon Blankenbeck at 321-301-0013. For Coast Guard related issues contact Sector Jacksonville, Waterways Management Division at (904) 564-7500 x7715.

Chart 11478

LNM: 10/16

**FLORIDA – CAPE CANAVERAL – PORT CANAVERAL: Dredge Operations.**

Dutra Dredging will continue dredge operations in Cape Canaveral. Operations will be 24 hours/7 days a week in various areas of the Canaveral Harbor and Entrance Channel located at around 28-24-36.79N and 80-36'-25.15W and disposal site at ODMS. Clamshell dredges DB PAULA LEE will carry out dredging operations and 2 split hull scows. The scows will be utilized for all Disposal Operations to ODMS. Tender Tug TROJAN and other equipment will also be supplied. All vessels will monitor Channels 12, 14, and 82. The tow tug AMERICAN CHAMPION will use the call sign KX7468. Operations will continue until on or about December 31, 2016. Further information contact Brad Shoffit (415)-519- 4262 or Joe Dunlap (415) 302-8709. Mariners are advised to use extreme caution while transiting the dredge area.

Chart 11478

LNM: 52/15

**FLORIDA – FORT PIERCE HARBOR – BANTY SAUNDERS RECREATIONAL AREA: Private Aid/Hazard to Navigation.**

Private aid Banty Saunders Recreational Area Daybeacon 12 (LLNR 9895) reported destroyed. Wreckage appears to be 6" above the waterline and poses a hazard to navigation. Mariners are advised to use extreme caution while transiting the area.

Chart 11475

LNM: 19/16

**FLORIDA - INDIAN RIVER - TURKEY CREEK: Dredge Operations, Muck Removal.**

Gator Dredging will commence "Muck Removal" operations from approximately 01 February until approximately 01 June 2016. See enclosure section for complete details of project, schedules, pipeline plans and booster pump location details. For more details contact the project POC Tyler McDougal (727) 527-1300 ext 24.

Chart 11472

LNM: 05/16

**FLORIDA – PALM SHORES TO WEST PALM BEACH - JUPITER INLET: Hazard to Navigation/SHOALING.**

Shoaling has been reported in Jupiter Inlet. Depths as low as 5 feet have been reported at low tide. A white Danger Shoal Buoy displaying a FL Q W light has been set where the most significant shoaling has been found in position 26-56-53.617N/080-04-45.846W. Mariners are strongly encouraged to use extreme caution while transiting the area.

Chart 11472

LNM: 11/16

**FLORIDA – PALM SHORES TO WEST PALM BEACH – SINGER ISLAND CHANNEL: Hazard to Navigation.**

Singer Island Channel Daybeacon 8 (LLNR 10213) is destroyed. The steel pile is leaning in the channel above the waterline and poses a hazard to navigation. Wreckage is marked with a TRLB WR8, with FL Q R characteristics, 4M and set approximately 3 yards channelward of the wreckage in position 26-46-55.856N/080-02-36.657W.

Chart 11472

LNM: 21/16

**FLORIDA - PALM SHORES TO WEST PALM BEACH - LAKE WORTH INLET: Hazard to Navigation.**

Lake Worth Inlet Light 13 (LLNR 10255) is destroyed. The remains of the steel pile pose a hazard to navigation. Wreckage is marked with a TRLB WR13, FI Q G light, 5 yards channelward of wreckage. Mariners are advised to exercise extreme caution while transiting the area.

Charts: 11466 11472

LNM: 11/16

**FLORIDA – NORTH MIAMI BEACH – SUNNY ISLES: Construction of the North Bay Road Pedestrian Emergency Bridge.**

Ebsary Foundation will commence construction in Sunny Isles Beach, FL. working in the Town Center Park Canal from May 1, 2016 thru December 31, 2016. The GPS Coordinates of the work area are; N 25°56.10N/80°7.36W. Ebsary Foundation will have a 48' x 120' deck barge (Name: EB 120) with a 150 Ton crane mounted on it, and a 25' x 14' tug boat (Name: MACK). The scope of work involves installing a new bridge across the canal. The barges and tug boat will be located inside the construction area and will monitor VHF Channel 16. The canal will be completely closed to marine traffic during construction operations. Operations will be Monday through Saturday from 7:00am to 7:00pm. Recreational and commercial boaters are advised to use extra precaution when navigating through this section of the waterway. For further information contact Captain Richard Varney, 305-898-3965.

Chart 11467

LNM: 11/16

**FLORIDA – MIAMI – BISCAYNE BAY - JULIA TUTTLE: Marina Project (UPDATE: January 11, 2016)**

Ebsary Foundation will commence work on (2) dredge disposal locations on or about October 1, 2014 on the north side of the Julia Tuttle Causeway until 30 June 2016.

There will be (2) barges, the 1st Barge will be a 48ft x 120ft deck barge with a 100 Ton crane mounted on it. The 2nd barge will be 40ft x 80ft Deck barge. Both barges will monitor VHF Channel 16. Operations will be Monday through Friday from 7:00am to 6:00pm. The barges will be located in the construction area 24/7.

Area #1 Worksite Coordinates:

25°48'55.37N/80°08'47.59W SW Corner  
25°48'55.63N/80°08'37.82W SE Corner  
25°49'09.87N/80°08'35.48W NE Corner  
25°49'11.90N/80°08'46.30W NW Corner

Area #2 Worksite Coordinates: (COMPLETED - Ref: LNM 02/16)

25°48'44.45N/80°09'15.28W SW Corner  
25°48'44.19N/80°08'57.18W SE Corner  
25°48'47.60N/80°08'56.58W NE Corner  
25°48'47.81N/80°09'15.33W NW Corner

Red marks on the drawing are 24" steel pipe pilings that will be embedded into the ground. The pipes will be sticking out of the water approximately 6ft and will have a flashing white beacon located on the top of each piling. Yellow turbidity curtains will be placed in the water and attached to the pilings. Refer to enclosure section for the Seagrass and Sponge Mitigation area turbidity and curtain layout (update: 1/9/2015.) Further information contact the Project POC Brent Huffman (305) 325-0530 ext 113. Ref: LNM 37/15, 41/15, 02/16.

Chart 11467

LNM: 33/14

**FLORIDA - MIAMI HARBOR - GOVERNMENT CUT: Old Structure Designated to become a Private Aid.**

The old Government Cut Range Front Light structure has been discontinued. However the structure has been designated to become a "Private Aid to Navigation" named "BENT LIGHT" in position 25-45-11.048N/080-06-28.821W displaying four non-lateral red dayboards marked with the letter B with FI W 4s light. (Ref: LNM 06/15, 18/15, 20/15, 31/15, 02/16, 05/16)

Chart 11468

LNM: 29/14

**FLORIDA - MIAMI HARBOR - MIAMI MAIN CHANNEL & FISHERMANS CHANNEL: Miami Harbor Deepening Phase 3 (UPDATE: September 18, 2015)**

Great Lakes Dredge & Dock Company, LLC (GLDD) has completed dredge operations and work associated with the Miami Harbor Deepening Project Phase 3 in Lummus Island Turning Basin, Fisherman's Channel, Fisher Island Turning Basin and Cut-4 and Port Berthing Areas.

Points of contact for the project: Project Manager, Chris Pomfret (239) 250-0974, CPomfret@gldd.com, or Site Operations Manager, David

**FLORIDA - MIAMI HARBOR - MIAMI MAIN CHANNEL & FISHERMANS CHANNEL: Miami Harbor Deepening Phase 3 (UPDATE: September 18, 2015)**

Johanson (561) 758-2872 DJJohanson@gldd.com. For Coast Guard related issues contact Sector Miami Waterways Management Division at: (305) 535-8724 or 8720. Ref LNM: 05/14, 06/14, 51/14, 01/15, 08/15, 11/15, 12/15, 15/15, 21/15, 23/15, 26/15, 28/15,34/15, 38/15

**AIDS TEMPORARILY RELOCATED UNTIL FURTHER NOTICE:**

- Miami Main Channel TRLB 15 (LLNR 10550) temporarily relocated to 25-45-51.280N/080-08-10.407W
- Fishermans Channel TRLB 5 (LLNR 10655) temporarily relocated to 25-45-52.417N/080-09-00.451W
- Fishermans Channel TRLB 9 (LLNR 10665) temporarily relocated to 25-45-53.815N/080-09-32.951W Ref: LNM 18/15

**TEMPORARILY DISESTABLISHED UNTIL FURTHER NOTICE:**

- Lumms Island Turning Basin TRLB 9A (LLNR 10675) Ref: LNM 28/15
- Lumms Island Turning Basin TRLB 9E (LLNR 10680.7)

**AIDS TEMPORARILY DISESTABLISHED AND REPLACED WITH A TRLB UNTIL FURTHER NOTICE:**

- Miami Main Channel LT 15 (LLNR 10550) to TRLB, FI G 2.5s
- Miami Main Channel Light 19 (LLNR 10740) to TRLB, FI G 4s
- Fishermans Channel Light 5 (LLNR 10655) to TRLB, FI G 6s
- Fishermans Channel Light 7 (LLNR 10660) to TRLB, FI G 4s
- Fishermans Channel Light 9 (LLNR 10665) to TRLB, FI G 6s
- Lumms Island Turning Basin Light B (LLNR 10680) to TRLB 9B, FI G 4s
- Fishermans Channel Light 11 (LLNR 10685) to TRLB, FI Q G, and nominal range reduced from 5NM to 4NM, Ref: LNM 15/15

Charts: 11467 11468

LNM: 36/13

**FLORIDA – MIAMI – NORRIS CUT – FISHER ISLAND TO VIRGINIA KEY: Norris Cut Tunnel Project (UPDATE: January 4, 2016)**

Nicholson Construction will be tunneling underneath Norris Cut Channel starting September 21, 2015. The tunneling will be from Virginia Key to Fisher Island, approximately 45 feet below seafloor. The estimated completion date for this project is end of July 2016. Nicholson Construction will monitor VHF-channel 13 & 81. Boaters, divers, and swimmers are advised to proceed through the area with caution. Further information; contact Eugene Mirsky at (201) 341-4660. Ref: LNM 01/16

Charts: 11466 11468

LNM: 38/15

**FLORIDA - MIAMI TO MARATON AND FLORIDA BAY - CAESAR CREEK: Hazard to Navigation.**

Caesar Creek Daybeacon 30 (LLNR 11130) is destroyed. The remains of the concrete pile is a hazard to navigation. The Wreckage is marked with a TRLB WR30, FI Q R set 4 yards channelward in temporary position 25-24-15.270N/080-14-27.609W. Mariners are advised to exercise extreme caution while transiting the area.

Charts: 11451 11463

LNM: 22/16

**FLORIDA - MIAMI TO MARATHON AND FLORIDA BAY - LARGO SOUND CHANNEL: Hazard to Navigation (UPDATE: March 14, 2016)**

Largo Sound Channel Daybeacon 7 (LLNR 11800) is destroyed. The steel pile may pose a hazard to navigation. Wreckage is marked with a TRLB WR7, FI Q G. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11451

LNM: 10/16

**FLORIDA – MIAMI TO MARATHON AND FLORIDA BAY – HAWK CHANNEL: TRLT**

Mosquito Bank Light 35 (LLNR 11890) is extinguished. The structure is deemed unsafe to climb. A temporary light (TRLT) with different characteristics is mounted on the west facing lower beam displaying FI Q G, 4NM. Mariners are advised to transit the area with caution.

Chart 11451

LNM: 41/15

**FLORIDA – MIAMI TO MARATHON AND FLORIDA BAY – TAVERNIER CREEK: Private Aid/Hazard to Navigation.**

The U.S. Coast Guard received a report of Private aid Tavernier Creek Daybeacon 16 (LLNR 12140) is destroyed and poses a hazard to navigation. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11451

LNM: 14/16

**FLORIDA - KEY WEST - HAWK CHANNEL: Hazard to Navigation.**

The U.S. Coast Guard received a report of a sunken vessel in approximate position 24-32.722N 081-45.903W. The vessel a Sportfisher sunk in 10ft of water with 8ft of the flybridge exposed above the waterline. Mariners are advised to exercise extreme caution while transiting the area.

Charts: 11441 11442 11447

LNM: 49/15

**FLORIDA - KEY WEST HARBOR AND APPROACHES - KEY WEST MAIN CHANNEL: Temporary Establishment of Lighted Buoy of Hazard to Navigation (UPDATE: March 18, 2016).**

The M/V TUG TILLY has sunk and the 6-8ft mast is no longer sticking out of the water. The hazard is sub-surface. The wreckage is marked with a temporary "WR" Lighted Buoy, FI Q R light, 3NM in position 24-31-13.199N/081-49-50.819W. Mariners are advised to exercise extreme caution while transiting the area. Ref: Sector KWT BNM 036/14, 046/14. Ref: LNM 09/14

\*\*The TRLB marking the surface hazard to navigation is missing\*\*

Charts: 11441 11446 11447

LNM: 05/16

**FLORIDA - KEY WEST HARBOR AND APPROACHES - KEY WEST MAIN CHANNEL: Hazard to Navigation (UPDATE: March 18, 2016)**

The S/V PAPEETE has sunk and the mast of the S/V is approximately 2ft below the surface. The wreckage is marked with TRLB, FI Q W, and 3NM light in approximate position 24-30-35.156N/081-50-27.322W. Mariners are advised to exercise extreme caution while transiting the area.

Charts: 11441 11446 11447

LNM: 05/16

**FLORIDA - DRY TORTUGAS - BIRD KEY HARBOR: Hazard to Navigation.**

The U.S. Coast Guard received a report of Bird Key Harbor Daybeacon 3BK (LLNR 15580) the steel pile is missing dayboards. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11438

LNM: 02/16

**FLORIDA - CHATHAM RIVER TO CLAM PASS – NATIONAL PARK SERVICE BOAT BASIN SOUTH CHANNEL: Private Aid/Hazard to Navigation.**

The U.S. Coast Guard received a report of Private aid National Park Service Boat Basin South Channel Daybeacon 4 (LLNR 16120) is destroyed and poses a hazard to navigation. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11429

LNM: 14/16

**FLORIDA – LOSTMANS RIVER TO WIGGINS PASS - BIG MARCO PASS – BIG MARCO RIVER – COLLIER CREEK: Dredge Operations.**

Gator Dredging will commence dredging and a pipeline system along the mouth of Collier Creek beginning approximately 27 June 2016. Operations include installing submerged pipeline along the edge of Big Marco River from Collier Creek, crossing Big Marco River at the pass to dispose material at the Big Marco Pass/Capri Pass Borrow Area/Offshore Disposal Area. Operations will continue until approximately July 29, 2016. Further information contact Gator dredging (727) 527-1300 ext 24. See enclosure section for floating and marked pipeline and project vicinity map. Mariners are advised to exercise caution while transiting the area.

Chart 11430

LNM: 25/16

**FLORIDA - LOSTMANS RIVER TO WIGGINS PASS - BIG MARCO RIVER: Private Aid/Hazard to Navigation.**

Private aid Big Marco River Daybeacon 16 (LLNR 16860) is destroyed. The wreckage poses a hazard to navigation. Mariners are advised to transit the area with extreme caution while transiting the area.

Chart 11430

LNM: 13/16

**FLORIDA - LOSTMANS RIVER TO WIGGINS PASS - CITY OF MARCO ISLAND – HIDEAWAY BEACH: Nearshore Borrow Area Excavation Project (UPDATE: June 3, 2016).**

Gator Dredging Company will commence dredge operations and install submerged pipeline along Hideaway Beach, Tigertail Beach and Marco Gulf Front Beach Fill Area. Operations will be approximately 02 May until approximately the end of July, 2016. The project requires the assistance of two (2) booster pumps which will be staged in the offshore pipeline corridor at approximately 7,500 LF increments from the center of the borrow area. (See enclosure section for Project Site-Plan/Borrow Site Plan).

Most of the pipeline will be submerged except for approximately 400 feet directly behind the dredge to allow for dredge maneuverability, approximately 200 feet as it connects to and from the booster pump stations, and the transition from submerged to upland pipeline. There will be a 400 foot section of floating pipe behind the dredge and outfitted with floats every 25 feet. This floating pipe is the immediate dredge discharge pipe and will remain floating for dredge maneuverability. The floats will be lighted for navigation safety. There will also be 250 pound anchors placed every 500ft and tied to the pipeline. The location of the anchors will be marked by a 12" yellow buoy and it is estimated ~30 anchors used along the offshore pipeline corridor. The floating pipeline behind the dredge will be marked by yellow can buoys every 50 to 75ft and will flash an amber Light every 2s, 2NM during low-light or night-time hours. The Buoys will read "DREDGE PIPELINE". Offshore corridor sections around North and South ends of Tigertail Beach where depths are less than 6ft of water and where the two (2) booster pump stations are also be marked by yellow lighted can buoys as these will be the only areas within the submerged offshore pipeline corridor which have or may have navigation hazards. The can buoys will have an orange diamond sign and state "SUBMERGED PIPELINE". Further information contact Gator Dredging (727) 527-1300 Ext 24. Mariners are advised to exercise caution while transiting the area. (Ref: LNM 23/16)

Chart 11430

LNM: 18/16

**FLORIDA - LOSTMANS RIVER TO WIGGINS PASS - GORDON PASS CHANNEL TO NAPLES BAY CHANNEL: Shoaling/Hazard to Navigation.**

There is dangerous shoaling from Gordon Pass Channel Daybeacon 1 (LLNR 17453) to Naples Bay Channel Light 20 (LLNR 17540). There are currently no plans by the Army Corps of Engineers to maintain the federal project channel depth of 12ft.

Gordon Pass Daybeacon 1 (LLNR 17453) has been relocated to 26-05-27.605N/081-48-26.265W

Gordon Pass Channel Light 2 (LLNR 17455) has been replaced by a TRLB displaying a FI R 4s light and a 3NM range.

Gordon Pass Shoal Light (LLNR 17450) has been established in position 26-05-29.905N/081-48-26.427W displaying a FI Q W light and a 3NM range.

MARINERS ARE ADVISED TO EXERCISE EXTREME CAUTION AND LOCAL KNOWLEDGE OF THE CHANNEL CONDITIONS IS RECOMMENDED BEFORE ATTEMPTING PASSAGE.

Chart 11430

LNM: 22/15

**FLORIDA - FORT MYERS TO CHARLOTTE HARBOR AND WIGGINS PASS - TEMPUSTECH MARINA: Private Aid/Hazard to**

**FLORIDA - FORT MYERS TO CHARLOTTE HARBOR AND WIGGINS PASS - TEMPUSTECH MARINA: Private Aid/Hazard to Navigation.**

Private aid Barefoot Boat Club Daybeacon 8 (LLNR 17910) is destroyed. The remains of the aid may pose a hazard to navigation. Mariners are advised to transit the area with extreme caution.

Chart 11427

LNM: 32/14

**FLORIDA – FORT MYERS TO CHARLOTTE HARBOR AND WIGGINS PASS – NEW PASS CHANNEL IN LEE COUNTY: Shoaling/Hazard to Navigation.**

The U.S. Coast Guard has received a report of shoaling in the vicinity of New Pass. Shoaling is occurring from Private aid New Pass Lighted Buoy 1 (LLNR 17964) position 26-22-19.080N/081-52-27.960W to Buoy 4 (LLNR 17970) position 26-22-38.460N/081-52-09.330W. This channel is very shallow and marked with Private Aids to Navigation. MARINERS ARE ADVISED TO EXERCISE EXTREME CAUTION AND LOCAL KNOWLEDGE OF THE CHANNEL CONDITIONS IS RECOMMENDED BEFORE ATTEMPTING PASSAGE.

Chart 11427

LNM: 15/16

**FLORIDA – FORT MYERS TO CHARLOTTE HARBOR AND WIGGINS PASS – BIG CARLOS PASS: Shoaling/Hazard to Navigation.**

The U.S. Coast Guard has received a report of shoaling in the vicinity of Big Carlos Pass. Shoaling is occurring from Private aid Big Carlos Pass Lighted Buoy 1 (17975) position 26-23-11.760N/081-53-27.100W to the SR 865 Big Carlos Pass Bridge. This channel is very shallow and marked with Private Aids to Navigation. . MARINERS ARE ADVISED TO EXERCISE EXTREME CAUTION AND LOCAL KNOWLEDGE OF THE CHANNEL CONDITIONS IS RECOMMENDED BEFORE ATTEMPTING PASSAGE.

Chart 11427

LNM: 15/16

**FLORIDA - FORT MYERS TO CHARLOTTE HARBOR AND WIGGINS PASS - MATANZAS PASS CHANNEL: Fort Myers Beach Harbor, Matanzas Pass Channel Maintenance Dredging, 12-Foot Project (UPDATE: May 18, 2016)**

Southwind Construction Corporation will begin mobilizing equipment on or about 08 June and commence dredge operations on or about 16 June 2016 in Ft Myers Beach Harbor until approximately 01 August 2016.

A two-week mobilization period is anticipated from Goose Creek, South Carolina to Ft Myers Beach. Upon arrival, crews will commence setup of attendant plant and pipeline traversing from Cut-3 (Sta. 7+00) northerly and across Bowditch Point along south right of way line into Gulf of Mexico thence traversing southerly 800' offshore to the Nearshore Disposal Area. The Federal Channel design is established at 125' wide for Cut-3 which will be dredged in a north to south direction in a single pass to (Sta. 18+54.84). Upon completion, an acceptance survey shall be performed and all floating plant shall be relocated to Station 45+00 in Cut-1 along the northern end of Bowditch Point. Cut-1 and adjacent widener varies in width from 150' to 250' and shall be dredged in two separate cuts each being approximately 125' to 150' in width. Initially the north half of Cut-1 will be completed in its entirety with the south half to immediately follow. Pipeline placement in this area again shall be along the south right of way of Bowditch Point and completely clear of the proposed side slope of the design template. All vessel traffic shall pass to the north of plant and ancillary equipment during this timeframe. Placement of all material in the Nearshore Disposal Area shall progress in a west to east continuous manner to elevation -2.5 NAVD88.

Operations consist of maintenance dredging of Ft. Myers Beach Harbor and The Federal Channel within portions of Cut-1, Cut-2A, and Cut 3. Dredge WILKO and many other work boats, barges and submerged/floating pipeline will be utilized. All dredged material will be placed in the nearshore disposal area located approximately a quarter mile southeast of Ft. Myers Beach Pier. Maximum pumping distance will be approximately 3.5 miles. Work also includes turbidity monitoring and environmental protection activities related to the dredging operations. Dredge activities will run 24/7. Dredge WILKO will monitor VHF Fm channels 13, 16 and working 79.

The following aids have been temporarily relocated and temporarily changed to TRUB's and (1) TRLB to facilitate dredge operations: Ref LNM 21/16

- Matanzas Pass TEMP BUOY 2A (NO LLNR) to position 26-27-53.636N/081-58-11.506W.
- Matanzas Pass Channel Daybeacon 3 (LLNR 18090) TRUB 3 to position 26-27-49.111N/081-58-18.445W.
- Matanzas Pass Channel Daybeacon 4 (LLNR 18095) TRUB 4 to position 26-27-55.899N/081-58-08.484W.
- Matanzas Pass Channel Light 5 (LLNR 18107) TRLB 5, FI G 4s, 5M to position 26-27-57.400N/081-58-10.186W.
- Matanzas Pass Channel Daybeacon 6 (LLNR 18110) TRUB 6 to position 26-27-58.331N/081-58-02.467W.
- Matanzas Pass Channel Daybeacon 11 (LLNR 18230) TRUB 11 to position 26-27-50.599N/081-57-52.270W.

Project POC's Darrell Stewart, Project Manager (812) 455-7199 or dstewart@southwindco.com  
Project Superintendent: David Lynn (812) 455-1770 or dredgeboater79@aol.com  
CQC Manager: Patrick Gant (407) 493-8870 or pgant@titancae.com  
Site Safety /SSHO Steve Gant (931) 247-2299 or sgant@titancae.com  
Mr. Berlon Hansford (812) 455-8861

See enclosure section for project vicinity map.

Chart 11427

LNM: 20/16

**FLORIDA - FORT MYERS TO CHARLOTTE HARBOR AND WIGGINS PASS - MATANZAS PASS CHANNEL: SHOALING (Update June 17, 2015).**

Due to Shoaling in Matanzas Pass Channel the following aids have been relocated: Ref: LNM 20/15, 21/15.

- Matanzas Pass Channel TRUB 2A, to position 26-27-53.609N 081-58-10.667W (Ref: LNM 25/15)
- Matanzas Pass Channel Daybeacon 4 (LLNR 18095) to position 26-27-55.554N 081-58-08.442W
- Matanzas Pass Channel Light 5 (LLNR 18107) to position 26-27-56.855N 081-58-09.880W

**FLORIDA - FORT MYERS TO CHARLOTTE HARBOR AND WIGGINS PASS - MATANZAS PASS CHANNEL: SHOALING (Update June 17, 2015).**

-Matanzas Pass Channel Daybeacon 6 (LLNR 18110) to position 26-27-57.826N 081-58-04.171W

MARINERS ARE ADVISED TO EXERCISE EXTREME CAUTION AND LOCAL KNOWLEDGE OF THE CHANNEL CONDITIONS IS RECOMMENDED BEFORE ATTEMPTING PASSAGE.

Link to the survey [http://www.saj.usace.army.mil/Portals/44/docs/Navigation/hydro\\_surveys/14-101.pdf](http://www.saj.usace.army.mil/Portals/44/docs/Navigation/hydro_surveys/14-101.pdf)

Chart 11427

LNM: 20/15

**FLORIDA - FORT MYERS TO CHARLOTTE HARBOR AND WIGGINS PASS – HURRICANE BAY: HAZARD TO NAVIGATION.**

The U.S. Coast Guard received a report of Hurricane Pass Daybeacon 10 (LLNR 18350) is destroyed and poses a hazard to navigation. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11427

LNM: 17/16

**FLORIDA – PORT CHARLOTTE: South Gulf Cove Lock Myakka Waterway Maintenance & Repairs (UPDATE: June 21, 2016 - PHASE TWO).**

The South Gulf Cove Lock repairs will begin PHASE TWO Monday, June 27 and continue until July 1, 2016 with the lock being closed from 7am – 6pm daily for marine traffic. All work for phase two will be completed with the exception of the lock gate seals once the material is delivered further closures will be needed. For further information contact the Project Manager, Randy Vowell at the Charlotte County Public Works Maintenance & Operations Division (941) 575-3680.

Chart 11426

LNM: 18/16

**FLORIDA - CHARLOTTE HARBOR TO TAMPA BAY - BIG SARASOTA PASS: Shoaling.**

Mariners are advised to exercise extreme caution and use local knowledge of BIG SARASOTA PASS and its conditions due to shoaling before attempting passage through Big Sarasota Pass Channel, Shoal Daybeacon A (LLNR 21465) position 27-15-58.000N/ 082-33-53.000W to Daybeacon 15 A (LLNR 21530) position 27-18-17.609N/082-33-37.740W. Private Buoys are not charted due to constantly shifting shoals and Buoys may not signify best water.

Chart 11425

LNM: 20/16

**FLORIDA - CHARLOTTE HARBOR TO TAMPA BAY - BIG SARASOTA PASS: Private Aid/Hazard to Navigation.**

Private aid Big Sarasota Pass Daybeacon 8 (LLNR 21500.8) reported destroyed and poses a hazard to navigation. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11425

LNM: 24/16

**FLORIDA – CHARLOTTE HARBOR TO TAMPA BAY – NORTH SIESTA KEY: Private Aid/Hazard to Navigation.**

Private aid North Siesta Key Daybeacon 1 (LLNR 21570.1) is destroyed and partially submerged. The wreckage poses a hazard to navigation. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11425

LNM: 14/16

**FLORIDA - CHARLOTTE HARBOR TO TAMPA BAY – LONGBOAT PASS: Hazard to Navigation/SOALING (UPDATE: April 16, 2015)**

Due to Shoaling - Temporarily Disestablished Daybeacons:

-Longboat Pass DBN 1 (LLNR 21757)

-Longboat Pass DBN 2 (LLNR 21758)

-Longboat Pass DBN 3 (LLNR 21760)

Temporarily Established Buoys:

-Longboat Pass TEMP Buoy 1 (LLNR 21757) temporarily relocate to position 27-25-55.788N/082-41-43.138W (Ref: LNM 38/14, 12/15, 16/15)

-Longboat Pass TEMP Buoy 2 (LLNR 21758) temporarily relocate to position 27-25-56.232N/082-41-40.045W (Ref: LNM 16/15)

-Longboat Pass TEMP Buoy 2A in position 27-26-22.076N/082-41-39.324W

-Longboat Pass TEMP Buoy 3 (LLNR 21760) in position 27-26-10.131N/082-41-46.746W

-Longboat Pass TEMP Buoy 3A in position 27-26-20.809N/082-41-43.716W

MARINERS ARE ADVISED TO EXERCISE EXTREME CAUTION AND LOCAL KNOWLEDGE OF THE CHANNEL CONDITIONS IS RECOMMENDED BEFORE ATTEMPTING PASSAGE.

Chart 11424

LNM: 38/14

**FLORIDA - CHARLOTTE HARBOR TO TAMPA BAY - NEW PASS IN SARASOTA COUNTY.**

The U.S. Coast Guard has temporarily removed all Federal Aids to Navigation from the NEW PASS ENTRANCE LIGHT NP (LLNR 1345/21585) to NEW PASS LIGHT 7 (LLNR 21620)

NEW PASS ENTRANCE LIGHT NP (LLNR 1345/21585) has been temporarily discontinued and renamed NEW PASS SHOAL LIGHT and converted to a Danger Shoal marker with an FI Q W light and 3NM.

NEW PASS CHANNEL LIGHT 7 (21620) has been temporarily discontinued and renamed NEW PASS INTERIOR SHOAL LIGHT and converted to a Danger Shoal marker with an FI Q W light and 3NM.

**FLORIDA - CHARLOTTE HARBOR TO TAMPA BAY - NEW PASS IN SARASOTA COUNTY.**

The increased shoaling has created an unsafe situation and the U.S. Coast Guard can no longer mark "SAFE WATER". The following aids have been temporarily discontinued:

- NEW PASS CHANNEL BUOY 1 (21590)
- NEW PASS CHANNEL BUOY 2 (21595)
- NEW PASS CHANNEL BUOY 3A (21600)
- NEW PASS CHANNEL BUOY 4 (21603)
- NEW PASS CHANNEL BUOY 5 (21605)
- NEW PASS CHANNEL BUOY 5A (21610)

THE ENTRANCE CHANNEL IS SUBJECT TO CONTINUAL CHANGE. BUOYS ARE BEING REMOVED DUE TO INSUFFICIENT WATER. MARINERS ARE ADVISED TO AVOID NEW PASS AND SEEK ALTERNATE ROUTES TO AND FROM THE GULF OF MEXICO AND USE EXTREME CAUTION WHILE IN THIS AREA. FOLLOWING SUMMER DREDGE OPERATIONS, THE U.S. COAST GUARD WILL RETURN THE AIDS TO NAVIGATION BACK TO THEIR ASSIGNED POSITIONS.

Charts: 11424 11425

LNM: 13/16

**FLORIDA - CHARLOTTE HARBOR TO TAMPA BAY - LONG BOAT KEY PASS – BRADENTON BEACH: : Concrete Groin Removal Operations (UPDATE: May 10, 2016)**

CAYO, LLC will begin construction on the concrete groins at Bradenton Beach. Tug EMMA D and barge GRANITE II will arrive approximately 30 March. The work will include removal and reconstruction of the concrete structures. Hours of operations will be conducted Monday through Friday from 7:00am to 5:00pm daily. The work area will be located between 27.4514 N, 82.6948 W and 27.4455 N, 82.6926 W. Both vessels will monitor VHF FM Channel 16 while in the area. There will also be a temporary anchor buoy approximately ¼ mile off shore of the work area. The buoy will be painted high visibility yellow and will be equipped with a solar powered light mounted on top. During holidays and rough seas the Tug EMMA D and barge GRANITE II will be spudded down with proper lighting in Long Boat Key Inlet south of the channel. The approximate completion date is July 2016.

Mariners are advised to use caution when transiting the area. Contact Jeff Boyd, Project Manager at 903-360-5176, or Captain David Wiseman, Marine Superintendent at 386-566-2823 with any questions or concerns. Ref: LNM 51/15

Chart 11425

LNM: 11/15

**FLORIDA – TAMPA BAY ENTRANCE – MULLET KEY CHANNEL: (UPDATE: January 11, 2016)**

Mullet Key Channel Range Front Light (LLNR 22355) is extinguished. The range was hit and sustained damage. The rebuild of the range continues. A TRUB is marking the area. Mariners are advised to transit the area with caution and stay within the marked channel. Ref: LNM 32/15, 02/16.

Chart 11415

LNM: 51/14

**FLORIDA – TAMPA BAY ENTRANCE – TAMPA BAY – CUT A CHANNEL: Aids to Navigation Repairs.**

PAC Comm Inc. will be repairing the following Aids to Navigation:

- Tampa Bay Cut A Channel RFL (LLNR 22405/60445) 27-38-23.810N/082-36-46.991W
- Tampa Bay Cut A Channel RRL (LLNR 22410/60450) 27-38-51.002N/082-35-47.847W

The repairs will start the second week of April and last approximately 60 days. The equipment involved will be a Spud barge HJL109 (140' x 50') with a Crane and Pushboat LIL RITA (25' x 16'). The work involves the repairs of the concrete structures that support the range markers. The range markers will not be affected and will stay functional during the entirety of the repairs. The Crane and Pushboat will monitor channels 16, 13, and 8 on the marine radio during the day. All operations will be 12 hours a day Monday thru Friday. The Barge will be spudded down at all times even non-work times. All equipment will be properly lighted. PAC Comm POC: Loren Martinez, (305) 498-0590 or Superintendent, Yunesky Hernandez (786) 218 -2560.

Chart 11416

LNM: 13/16

**FLORIDA - TAMPA BAY - TAMPA BAY CUT J CHANNEL: Hazard to Navigation.**

Tampa Bay Cut J Channel Outbound Range Rear Light (LLNR 23725) the tower has been removed and replaced with a TRLT, FI Q W. Mariners are advised to use extreme caution while transiting the area.

Chart 11416

LNM: 23/16

**FLORIDA - TAMPA BAY - DANA SHORES: Private Aid/Hazard to Navigation.**

Private aid Dana Shores Daybeacon 9 (LLNR 24210) is destroyed. The wreckage poses a hazard to navigation. Mariners are advised to transit the area with extreme caution.

Chart 11416

LNM: 28/15

**FLORIDA - TAMPA BAY - BAHIA BEACH: Private Aid/Hazard to Navigation.**

The U. S. Coast Guard received a report of Private aid Little Harbor Channel Daybeacon 3 (LLNR 24501) reported destroyed at the waterline and marked with a yellow life jacket. Mariners are advised to exercise caution while transiting the area.

Chart 11416

LNM: 25/16

**FLORIDA – TAMPA BAY – APOLLO BEACH: Dredge Operations (UPDATE: June 14, 2016).**

Gator Dredging is planning to move their dredge from the North Channel of the (ABWIG), community to the South & Main Channel as early as next

**FLORIDA – TAMPA BAY – APOLLO BEACH: Dredge Operations (UPDATE: June 14, 2016).**

week. This will include installing submerged pipeline from the dredge material management area to the dredge area with up to 2 booster pump locations on land on vacant lots. It will take approximately 6 weeks to complete dredging of this area after which they will remove all the equipment from the project area and the dredging project will be complete. The work is estimated to begin 20 June and end approximately 31 July 2016. Further information contact Gator dredging (727) 527-1300 ext 24.

See enclosure section for proposed pipeline route, aerial vicinity map and south & main channel dredge limits. Mariners are advised to exercise caution while transiting the area. (Ref: LNM 23/16, 24/16).

Chart 11416

LNM: 19/16

**FLORIDA - TAMPA BAY - SNELL ISLE: Hazard to Navigation.**

The U.S. Coast Guard received a report of an unlit steel piling in the vicinity of Private aids Snell Isle Daybeacon 7 (LLNR 25020.4) and Daybeacon 8 (LLNR 25020.5). The hazard is in approximate position 27-47.386N/082-36.686W. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11416

LNM: 41/15

**FLORIDA – TAMPA BAY TO PORT RICHEY – PASS-A-GRILLE: Shoaling.**

The U.S. Coast Guard received a report of shoaling in Pass-A-Grille Channel in the vicinity of Daybeacon 7A (LLNR 25485) 27-40-38.910N/082-44-40.387W. Mariners are advised to use extreme caution while transiting the area.

Chart 11411

LNM: 19/16

**FLORIDA – TAMPA BAY - IVO HILLSBOROUGH CUT C CHANNEL WITHIN PORT TAMPA BAY: Dredge Operations (UPDATE: May 11, 2016)**

Orion Marine will commence dredge operations within the Port of Tampa in the following locations: Miscellaneous Berths within Port Tampa Bay to Disposal Island 2D. Mechanical Clamshell Dredging will be performed within Port Tampa Bay (also inclusive of Port Sutton, Port Redwing, and Big Bend Channel). Loaded scow barges will be transported from Port Berths to the North side of Disposal Island 2D. Material from scow barges will be slurried and hydraulically pumped to the North Cell of Disposal Island 2D via submerged high density polyethylene pipeline.

Type of Operation: Mechanical Clamshell Dredging with Hydraulic Offloading of Scow Barges and Pumping Dredge Slurry to Disposal Island 2D

Commence Date: September, 2015

Completion Date: April 15, 2017 (anticipated) Ref: LNM 19/16

Hours of Operation: Approximately 12 hours per day (day shift only)

Days of Operation: Monday through Sunday (7 days per week)

Name of Contact Vessel: DRAVO

VHF – FM Channels Monitored: Channels 13, 16 and Working Channel 1

Land Contact: Justin Chorlog (Project Manager) Cellular Phone: (904) 712-7971

Lisa Porter (Safety Representative) Cellular Phone: (813) 476-9951

Mariners are urged to use extreme caution in the area, transit at their slowest safe speed to minimize wake, and proceed with caution after passing arrangements have been made. Floating rubber and submerged polyethylene pipeline associated with the hydraulic unloading operation near Disposal Island 2D will be utilized. Pipeline, vessels, and mooring piles, and buoys will be visibly lighted. A submerged pipeline will be utilized from the offloading barge to Disposal Island 2D. The area utilized by the hydraulic offloading operation (including barge, mooring piles, and all pipeline) will be outside of the navigation channel. Ref: LNM 32/15, 38/15

**Approximate Location of Temporary Features:**

Identification	Description	Latitude Longitude
Buoy 1 Marker Buoy #1 –	30" Steel Ball	27°53'31.48"N 82°26'10.94"W
Buoy 2 Marker Buoy #2 –	30" Steel Ball	27°53'19.62"N 82°26'14.04"W
BG1 Offloading Barge –	120' x 50' w/ Spuds	27°53'16.49"N 82°25'55.79"W
MP1 Mooring Pile #1 –	24" Round Steel	27°53'16.75"N 82°25'58.00"W
MP2 Mooring Pile #2 –	24" Round Steel	27°53'16.69"N 82°25'57.25"W
MP3 Mooring Pile #3 –	24" Round Steel	27°53'16.46"N 82°25'54.39"W
MP4 Mooring Pile #4 –	24" Round Steel	27°53'16.40"N 82°25'53.60"W
MP5 Mooring Pile #5 –	24" Round Steel	27°53'16.34"N 82°25'52.82"W
MP6 Mooring Pile #6 –	24" Round Steel	27°53'16.27"N 82°25'51.99"W

Chart 11416

LNM: 38/14

**FLORIDA – TAMPA BAY TO PORT RICHEY – JOHNS PASS CHANNEL: Hazard to Navigation/SHOALING (UPDATE: May 4, 2016).**

The entrance to Johns Pass Channel has a project depth of 10ft. The ACOE surveys found the project depth between Johns Pass Channel Light 2 (LLNR 25585) and Johns Pass Channel Light 4 (LLNR 25600) have reported soundings as low as 7.5ft due to shoaling. Shoaling also exists between Johns Pass Channel DBN 8 (LLNR 25625) and Johns Pass Channel Light 10 (LLNR 25630) with soundings as low as 3.6ft along the northern side of the channel. Mariners are advised to exercise extreme caution while transiting these areas.

**FLORIDA – TAMPA BAY TO PORT RICHEY – JOHNS PASS CHANNEL: Hazard to Navigation/SHOALING (UPDATE: May 4, 2016).**

Severe Shoaling reported on the north side of the channel between Johns Pass Channel Daybeacon 1 (LLNR 25580) 27-46-37.333N/ 082-47-37.083W and Buoy 3 (LLNR 25585.5) 27-46-39.531N/ 082-47-18.862W Ref: LNM 19/16

MARINERS ARE ADVISED TO EXERCISE EXTREME CAUTION AND LOCAL KNOWLEDGE OF THE CHANNEL CONDITIONS IS RECOMMENDED BEFORE ATTEMPTING PASSAGE.

Chart 11411

LNM: 48/14

**FLORIDA – TAMPA BAY TO PORT RICHEY – CLEARWATER PASS – CLEARWATER MARINA CHANNEL: (UPDATE July 6, 2015)**

**Hazard to Navigation/Shoaling.**

There is significant shoaling in the entrance to Clearwater Marina Channel between Light 2 (LLNR 25730) and Light 6 (LLNR 25755). STP BNM 577-15

Clearwater Marina Channel Light 6 (LLNR 25730) the lateral daymarks have been removed and replaced with Non-lateral White Daymarks worded "DANGER SHOAL." A Temporary Lighted Buoy 2 with FI Q R, 4M characteristics in position 27-57-49.011N 082-49-09.073W was relocated to best mark the channel. Mariners are advised to transit the area with extreme caution. Ref LNM: 27/15

The Army Corps of Engineers (ACOE) survey project depth between Clearwater Marina Channel Light 2 (LLNR 25730) and Clearwater Marina Channel DBN 4 (LLNR 25745) are as low as 4ft due to shoaling. Ref: LNM 48/14

MARINERS ARE ADVISED TO EXERCISE EXTREME CAUTION WHEN TRANSITING THE AREA. LOCAL KNOWLEDGE RECOMMENDED AS THE CHANNEL IS CONSTANTLY SHIFTING AND CHANGING. Ref: LNM 21/15

Chart 11411

LNM: 48/14

**FLORIDA - TAMPA BAY TO PORT RICHEY - DUNEDIN PASS: Private Aid/Hazard to Navigation.**

Private aid Dunedin Pass Daybeacon 8 (LLNR 25870) is reported destroyed. The remains pose a hazard to navigation. Mariners are advised to use extreme caution when transiting the area.

Chart 11411

LNM: 22/16

**FLORIDA - TAMPA BAY TO PORT RICHEY – HURRICANE PASS: Shoaling.**

Shoaling has been reported in the vicinity of Hurricane Pass-Gulf of Mexico-Pinellas County, between Private aids Hurricane Daybeacon 1 (25975) position 28-03-20.040N/082-49-50.640W and Daybeacon 18 (26025.5) position 28-02-53.820N/082-47-45.060W. Mariners are advised to use caution when transiting these waters or seek alternative routes to and from the Gulf of Mexico.

Chart 11411

LNM: 25/16

**FLORIDA - TAMPA BAY TO PORT RICHEY - ANCLOTE ANCHORAGE SOUTH ENTRANCE: Hazard to Navigation/Severe SHOALING.**

Shoal exists with a depth of 2ft at high tide in approximate position 28-09-12.60N/082-50-12.00W. The shoal runs NW to SE between Anclote Anchorage South Entrance Daybeacon 5 (LLNR 26085) and Anclote Anchorage South Entrance Light 7 (LLNR 26100) and extending across the channel.

The Lateral Daymarks have been removed from Anclote Anchorage South Entrance Daybeacon 5 (LLNR 26085) and Anclote Anchorage South Entrance Daybeacon 6 (LLNR 26095) and replaced with Non-Lateral White Daymarks worded "DANGER SHOAL."

-Anclote Anchorage South Entrance TRUB 5 established in position 28-09-04.908N/082-50-20.881W

-Anclote Anchorage South Entrance TRUB 5A relocated to position 28-09-16.279N/082-50-10.078W

MARINERS ARE ADVISED TO EXERCISE EXTREME CAUTION AND LOCAL KNOWLEDGE OF THE CHANNEL CONDITIONS IS RECOMMENDED BEFORE ATTEMPTING PASSAGE.

Chart 11411

LNM: 42/14

**FLORIDA - TAMPA BAY TO PORT RICHEY - ANCLOTE RIVER: Hazard to Navigation/Severe SHOALING.**

There is severe shoaling in the center of the Turning Basin, Anclote River, Tarpon Springs in the vicinity of Anclote River Turning Basin Daybeacon 51 (LLNR 26360) 28-09-24.672N/082-45-32.307W and Anclote River Turning Basin Daybeacon 53 (LLNR 26365) 28-09-24.774N/082-45-29.448W. Mariners are advised to use extreme caution while transiting the area.

Chart 11411

LNM: 31/14

**FLORIDA – ANCLOTE KEYS TO CRYSTAL RIVER - HOMOSASSA BAY: Hazard to Navigation.**

Homosassa Bay Buoy 8 (LLNR 28380) is reported off station and a hazard to navigation. Mariners are advised to exercise extreme caution when transiting the area.

Chart 11409

LNM: 23/16

**FLORIDA – ANCLOTE KEYS TO CRYSTAL RIVER – HOMOSASSA RIVER: Hazard to Navigation.**

The U.S. Coast Guard received a report of an (FWC) waterway marker destroyed and poses a potential hazard to navigation. The piling remnants are located below the low water level at 28-47.155N/82-38.064W near the confluence of the Prices Creek and the Homosassa River. Mariners are advised to exercise extreme caution while transiting the area.

**FLORIDA – ANCLOTE KEYS TO CRYSTAL RIVER – HOMOSASSA RIVER: Hazard to Navigation.**

Chart 11409

LNM: 04/15

**FLORIDA - ANCLOTE KEYS TO CRYSTAL RIVER - CRYSTAL RIVER: Hazard to Navigation (UPDATE: February 16, 2016)**

Crystal River Entrance Light 1 (LLNR 28775) is destroyed. The remains of the steel pile are below the waterline and are a hazard to navigation. Wreckage has been marked with a TRLB, FI Q G, 4M and set 5 yards channelward in position 28-54-43.477N/082-44-51.292W. Mariners are advised to exercise extreme caution while transiting the area. Ref: LNM 08/16.

Charts: 11408 11409

LNM: 04/16

**FLORIDA – CRYSTAL RIVER TO HORSESHOE POINT – CEDAR KEYS NORTHWEST CHANNEL: Hazard to Navigation/SHOALING (UPDATE: July 9, 2015).**

The U.S. Coast Guard received a report of shoaling between Cedar Keys Northwest Channel LT 19 (LLNR 29995) 29-07-08.057N/083-03-06.291W and DBN 22 (LLNR 30010) 29-07-08.117N/083-02-58.731W with depths as low as 1ft at low tide. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11408

LNM: 23/15

**FLORIDA – STEINHATCHEE RIVER: Hazard to Navigation.**

Steinhatchee River Daybeacon 50 (LLNR 30581) is destroyed. The steel pile is marked a TRLB "WR50" with FI Q R characteristics. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11407

LNM: 37/14

**FLORIDA - HORSESHOE POINT TO ROCK ISLAND - KEATON BEACH: Hazard to Navigation.**

Keaton Beach Daybeacon 3 (LLNR 30605) is destroyed. The remains of the steel pile are approximately 2ft above the waterline and pose a hazard to navigation. Wreckage has been marked with a TRLB WR3, FI Q G, 4M and set 8 yards channelward in position 29-48-53.483N/083-36-58.680W. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11407

LNM: 18/15

**WEST INDIES - HAITI - PORT-AU-PRINCE: Navigational Aids Unreliable.**

The navigational aids located in Port-Au-Prince and near Port-Au-Prince South Pier may be unreliable. Not all ruins and dangers are marked or known due to the January 2010 Earthquake. Lights on the aids may be unreliable and the aids should be considered unlighted. The mariner must use extreme caution when navigating through the area. Chart: 26186

LNM: 49/13

**WEST INDIES - HAITI - CAP HAITIEN: Navigational Aids Unreliable.**

The floating navigational aids located in Cap Haitien may be unreliable. Lights on some aids are from sources other than the U.S. Coast Guard and should be considered unlit. Mariners are advised to use extreme caution when navigating the area.

LNM: 12/14

**WEST INDIES - PUERTO RICO - ISLA DE VIEQUES - BAHIA SALINAS DEL SUR: Safety Zone for Removal Action.**

The U.S. Navy is conducting a Removal Action in the area of Punta Carrenero south coast of Vieques Island. This removal operation requires that all non-essential personnel and vessels stay outside the SAFETY ZONE while work is being conducted Monday through Friday from 7:00am to 4:00pm until approximately late August 2016. The safety zone extends from Ensenada Honda to Bahia Salinas del Sur for approximately 4000 yards from shore out to sea. Person of contact is Madeline Rivera and can be contacted via phone number (757) 286-6457, email:madeline.rivera@navy.mil. For any Coast Guard related issues contact Sector San Juan via VHF-FM channel 16 or 787-289-2041.

Chart 25650

LNM: 08/16

**WEST INDIES - PUERTO RICO -BAHIA DE SAN JUAN: Dredge Operations.**

Manson Construction will commence terminal improvements and dredging on November 12, 2015 in the Crowley Isla Grande Terminal until approximately June 1, 2016. Vessels used will be Derrick Barge HAAKON and various Tug Boats. The vessels will monitor VHF channel 16. For Further information contact Phil Tyer- Assistant Project Manager (904) 239-9323 or Jeff Atkins- Project Manager (904) 305-0044. For Coast Guard related issues contact Sector San Juan (787) 289-2041. Mariners are urged to use extreme caution in the area, transit at their slowest safe speed to minimize wake.

Chart 25670

LNM: 46/15

**SOUTH CAROLINA - AICW - BEAUFORT RIVER TO ST SIMONS SOUND - HILTON HEAD - CALIBOGUE SOUND: Beach Renourishment Project (UPDATE: May 31, 2016)**

Weeks Marine will start approximately 15 June and continuing until approximately 30 October 2016. The Dredge C.R. MCASKILL will be operating just north of Hilton Head Island in the vicinity of Port Royal Sound.

The proposed submerged line corridors will be bound by the following approximate locations:

32°15'25.34"N/080°38'32.09"W

32°14'44.01"N/080°37'11.69"W

32°13'5.60"N/080°36'18.89"W

32°11'4.92"N/080°38'48.88W and 32°15'6.73"N/080°38'48.88"W

New location for the staging area for Dredge C.R. MCCASKILL and supply barge:

32°17'33.18"N/080°45'38.44"W and 32°17'24.81"N/080°45'25.63"W

**SOUTH CAROLINA - AICW - BEAUFORT RIVER TO ST SIMONS SOUND - HILTON HEAD - CALIBOGUE SOUND: Beach Renourishment Project (UPDATE: May 31, 2016)**

Continuing until approximately 15 Nov 2016, Weeks Marine Inc. will stage equipment/ pipeline just north side of the channel between Hilton Head Island and Pinckney Island waterway, bounded by the following approximate positions:

32°16'4.99"N/080°44'29.13"W  
32°15'58.87"N/080°44'23.85"W  
32°16'9.28"N/080°44'12.79"W and 32°16'15.40"N/080°44'19.54"W

The staging area north of the Calibogue Sound waterway will be located between the following approximate positions:  
32°9'40.11N/080°49'10.84W and 32°9'8.01N/80°49'37.74W

Dredge pipeline will be assembled and transported to the Hilton Head Island project using the Harbor River waterway and then submerged from the borrow area to a placement site. Operations will continue on a twenty-four (24) hours per day, seven (7) days per week basis. Dredge C.R. MCCASKILL and tugs will monitor marine VHF channels 13 and 16. Mariners are urged to use extreme caution and transit the area at their slowest safe speed to create minimum wake after passing arrangements have been made.  
POC on site are:

PM, Doug Nelson - (985) 237-9667, denelson@weeksmarine.com  
East Coast Operation Manager, Joe Mazzarella - (985) 273-1152, jmmazzarella@weeksmarine.com  
Dean Robinson – (985) 709-2970, edrobinson@weeksmarine.com  
QCM, Robert Webb – (985) 688-2882, rgwebb@weeksmarine.com  
(Ref: LNM 07/16, 09/16, 12/16, 13/16, 14/16, 21/16, 22/16)

Charts: 11507 11516

LNM: 07/16

**SOUTH CAROLINA - AICW - CASINO CREEK TO BEAUFORT RIVER - WINYAH BAY - CHARLESTON HARBOR: Hazard to Navigation.**

Ashepoo-Coosaw Cutoff Light 184 (LLNR 35205) is destroyed. The wreckage poses a hazard to navigation. Mariners are advised to use extreme caution when transiting the area.

Chart 11518

LNM: 22/16

**GEORGIA – AICW – BEAUFORT RIVER TO ST SIMONS SOUND – DUPLIN RIVER: Hazard to Navigation.**

Doboy Sound Light 178 (LLNR 36795) is destroyed and the multi-pile steel is partially submerged at near low-tide. A temporary lighted buoy with an FI Q R, characteristics has been placed in temporary position 31-24-33.533N/081-18-38.213W. Mariners are advised to use extreme caution while transiting the area.

Chart 11507

LNM: 19/16

**GEORGIA - AICW - ST SIMONS SOUND TO TOLOMATO RIVER - CUMBERLAND SOUND: Hazard to Navigation.**

Cumberland River Light 45A (LLNR 37535) is destroyed. The remains of the steel pile are approximately 4ft above the waterline and pose hazard to navigation. Wreckage has been marked with a TRLB, FI Q R, and set 25 yards channelward in position 30-53-53.464N/081-38-29.57.963W. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11504

LNM: 08/16

**FLORIDA - AICW – ST SIMONS SOUND - TOLOMATO RIVER – PABLO CREEK: Dredge Operations.**

The following aids have been disestablished and temporarily relocated with temporary buoys (TRUB's) to facilitate dredging. Mariners are advised to exercise caution while transiting the area.

-PABLO CREEK LIGHT 5 (LLNR 38360) TRUB 5 established in position 30-22-38.630N/081-27-18.048W  
-PABLO CREEK LIGHT 6 (LLNR 38365) TRUB 6 established in position 30-22-31.769N/081-27-17.886W  
-PABLO CREEK DAYBEACON 7 (LLNR 38370) TRUB 7 established in position 30-22-30.440N/081-27-10.044W

Chart 11489

LNM: 17/16

**FLORIDA - AICW - TOLOMATO RIVER - PALM SHORES - PONCE DE LEON CUT: Hazard to Navigation.**

There is a submerged object near the Swoop Public Boat Ramp in Ponce de Leon Cut. The object is barely visible above the waterline and poses a hazard to navigation. A TRLB, with FI Q G characteristics is marking the hazard in approximate position 29-03-47.431N/080-56-09.548W. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11485

LNM: 15/16

**FLORIDA - AICW – TOLOMATO RIVER TO PALM SHORES – BANANA RIVER: Hazard to Navigation.**

The U.S. Coast Guard received a report of an abandoned pole with no markings or reflectors. The pole is in the vicinity of Banana River Daybeacon 26 (LLNR 42600) and Daybeacon 27 (LLNR 42605) in approximate position 28-20-54.360N/080-39-10.560W. The pole poses a serious hazard to navigation. Mariners are advised to exercise extreme caution when transiting the area.

Chart 11481

LNM: 23/16

**FLORIDA – AICW – PALM SHORES TO WEST PALM BEACH – INDIAN RIVER SOUTH SECTION: Hazard to Navigation.**

Indian River (South Section) Light 96 (LLNR 43860) is destroyed. The remains of the steel pile is a hazard to navigation. Wreckage is marked with a TRLB WR96, with FI Q R characteristics. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11472

LNM: 25/16

**FLORIDA - AICW - PALM SHORES TO WEST PALM BEACH - INDIAN RIVER PLANTATION MARINA CHANNEL: Private Aid/Hazard to Navigation.**

Private Aid Ind River Plantation Marina Channel Daybeacon 1 (LLNR 45820) is destroyed and poses a hazard to navigation. The remains of the pile are 1ft above the waterline. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11472

LNM: 18/15

**FLORIDA - AICW - PALM SHORES TO WEST PALM BEACH – INDIAN RIVER SOUTH SECTION: Shoaling.**

South of Indian River (South Section) Daybeacon 188 (LLNR 45195) water depths as low as 4 feet were recorded extending approximately 10-15 feet into the channel. In approximate position is 27-27.3541N/080-19.0568W. Mariners are urged to exercise extreme caution while transiting the area.

Chart 11472

LNM: 18/16

**FLORIDA – AICW – PALM SHORES TO WEST PALM BEACH: Temporary Lighted Buoy Established to Mark Shoal.**

Indian River (South Section) Lighted Buoy 188A has been temporarily established in position 27-27-02.163N/080-18-54.202W to mark a shoal encroaching the channel from the west. The TRLB has a FI Q R light. Water depths were found as low as 4ft in the channel. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11472

LNM: 21/16

**FLORIDA – AICW – PALM SHORES TO WEST PALM BEACH - Loxahatchee River: Private Aid/Hazard to Navigation.**

Private aid Loxahatchee River Daybeacon 2 (LLNR 46260) reported destroyed. The remains of the pile is partially submerged and is a hazard to navigation. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11472

LNM: 20/16

**FLORIDA – AICW – PALM SHORES TO WEST PALM BEACH - LOXAHATCHEE RIVER: Shoaling.**

Shoaling reported in the vicinity of Private aid Loxahatchee River Light 12 (LLNR 46305). Maintenance dredging of the inlet may be later in 2016. Further information can be found on the Jupiter Inlet District website at [www.jupiterinletdistrict.org](http://www.jupiterinletdistrict.org) click on Navigational aids. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11472

LNM: 02/16

**FLORIDA - AICW - PALM SHORES TO WEST PALM BEACH - OLD SLIP MARINA: Private Aid/Hazard to Navigation.**

Private aid Old Slip Marina Daybeacon 4 (LLNR 46680) is destroyed. The remains of the pile is barely visible and leaning over just below the water. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11472

LNM: 40/15

**FLORIDA – AICW – PALM SHORES TO WEST PALM BEACH – NORTHWEST OF PEANUT ISLAND: Dredge Operations of Rybovich Riviera Beach Marina Facility.**

Cavache will commence dredge operations on or about March 28, 2016 with Dredge MAYA CAELYN. Operations will be dredging the marina and the entrance channel of Rybovich's Riviera Beach Marina Facility adjacent to the Intracoastal Waterway north of the Port of Palm Beach and northwest of Peanut Island. The entrance channel to be dredged is located on the west side of the Intracoastal Waterway northwest of Peanut Island. Dredging operations are expected to be completed no later than May 31, 2016. The dredge will be disposing of the material via floating, submerged and landward pipelines. The disposal area is the Dredge Material Management Area (DMMA) on Peanut Island. The Portions of the pipeline closest to the dredge will remain floating and will be marked with flashing lights at night. The pipeline will be sunk in all other locations. A booster pump may be located near the lagoon/docks on the west side of Peanut Island. Mariners are urged to maintain safe distance from the dredge to avoid potential interference with the pipeline. Mariners are urged to transit at their slowest safe speed to minimize wake and proceed with caution after arrangements have been made. Dredge MAYA CAELYN can be reached on VHF channels 7A, 13 and 16. Further information contact Cavache (954) 568-0007.

Chart 11472

LNM: 12/16

**FLORIDA – LAKE WORTH TO DEERFIELD BEACH – HILLSBORO CANAL: Dredge Operations.**

Diversified Inc will commence dredge operations on or about 05 May until approximately early September, 2016 between the Dixie Hwy Bridge and Deerfield Island Park in the Hillsboro canal. Dredging equipment to be used is a 390ft Excavator with a 3 yard clamshell for mechanically dredging. Two (2) fill barges for transporting dredge material, one 70ft and one 40 ft, a 24ft Tub Boat GUNNER and a 15ft twin engine push boat. The Tug will monitor VHF-FM Channels 11 and 16. Operations will run Monday-Saturday, daylight hours only. Further information contact Project Superintendent, Clinton Hodges (561) 722-5630. Mariners are advised to use extreme caution while transiting the dredge area.

Chart 11467

LNM: 18/16

**FLORIDA - AICW - WEST PALM BEACH TO MIAMI - FORT LAUDERDALE: Intracoastal Waterway Deepening Project.**

The Florida Inland Navigation District (FIND) is sponsoring a project to deepen the AICW channel to -15 ft MLW in a ±2-mile section from 17th Street Causeway to just north of the Las Olas Bridge. Material from the AICW channel will be mechanically dredged by Cashman Dredging, Inc. and placed into a barge. The material will be dewatered and temporarily placed at a Dredged Material Management Area (DMMA) located at Port Everglades. Dredging will begin the first week of May 2016, and is expected to continue for about 50 weeks. The Dredge CAPTAIN A.J. FOURNIER will work daylight hours only. During the project, every reasonable effort will be made to accommodate normal, safe navigation operations. However, mariners should be aware that clearances within the AICW will be reduced and navigability will be limited during dredge operations. Mariners are urged to subscribe to daily email updates at [IWWDredgePosition@jaycashman.com](mailto:IWWDredgePosition@jaycashman.com) for operation reports and potential impacts to navigation, or call Stephen Tobin (877) 294-9990 or (888) 280-9630 for general questions concerning the project.

Chart 11470

LNM: 19/16

**FLORIDA - AICW - WEST PALM BEACH TO MIAMI - NEW RIVER: Hazard to Navigation.**

The U.S. Coast Guard received a report of a destroyed Regulatory sign in position 26-06.636N/080-06.615W. Mariners are urged to exercise caution while transiting the area.

Chart 11467

LNLM: 13/16

**FLORIDA – AICW – WEST PALM BEACH TO MIAMI – NEW RIVER – NEW RIVER CANAL: Hazard to Navigation.**

A hazard to navigation has been reported just west of the SR 7/441 Bridge on the north side of the New River Canal, Ft Lauderdale, Broward County, Florida. The hazard is a large tree that is currently visible during daylight hours; but does have the potential of sinking. Mariners should proceed with caution through this area.

LNLM: 18/16

**FLORIDA - AICW - WEST PALM BEACH TO MIAMI - BISCAYNE BAY: Severe Shoaling (UPDATE: April 29, 2016)**

Shoaling protrudes into the channel on the east side which reduces the channel width by approximately half of the charted width. To best mark water Biscayne Bay Buoy 7A and Biscayne Bay Buoy 7B have been relocated.

Biscayne Bay Buoy 7A (LLNR 47824) to 25-54-08.889N/080-07-50.887W  
Biscayne Bay Buoy 7B (LLNR 47828) to 25- 54-05.380N 080-07-53.838W

The water depths has been recorded as low as 6-ft at low tide within this channel. MARINERS ARE ADVISED TO EXERCISE EXTREME CAUTION WHILE TRANSITING THE AREA. LOCAL KNOWLEDGE RECOMMENDED AS THE CHANNEL IS CONSTANTLY SHIFTING AND CHANGING. (Ref: LNM 18/16)

Chart 11467

LNLM: 08/16

**FLORIDA – AICW – WEST PALM BEACH TO MIAMI – CORAL GABLES WATERWAY: Private Aid/ Hazard to Navigation.**

Private aid Coral Gables Waterway Daybeacon 4 (LLNR 49300) is missing both daymarks and poses a hazard to navigation. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11467

LNLM: 06/16

**FLORIDA - AICW - MIAMI TO MARATHON - LITTLE BASIN EAST: Private Aid/Hazard to Navigation.**

Private aid Little Basin East Daybeacon 3 (LLNR 50550) reported destroyed and broken at the waterline. Mariners are advised to transit the area with extreme caution.

Chart 11451

LNLM: 12/16

**FLORIDA – ST LUCIE TO FORT MEYERS TO LAKE OKEECHOBEE – ST LUCIE RIVER: Hazard to Navigation.**

Woods Point Daybeacon 1 (LLNR 50760) is destroyed. Wreckage is marked with a TRLB, FL Q G, 3NM in temporary position 27-12-15.657N/080-12-45.285W. Mariners are advised to exercise caution while transiting the area.

Chart 11428

LNLM: 14/16

**FLORIDA - ST LUCIE CANAL TO FORT MYERS AND LAKE OKEECHOBEE - ST LUCIE INLET: Hazard to Navigation.**

St Lucie Canal Daybeacon 37 (LLNR 51115) is destroyed. The remains of the concrete pile may pose a hazard to navigation. Wreckage has been marked with a TRLB, FL Q G, 3M light on its assigned position. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11428

LNLM: 22/16

**FLORIDA - OKEECHOBEE WATERWAY ROUTE 2: Culvert Construction Restricting Navigation.**

The U.S. Army Corps of Engineers has multiple contracted companies in the process of replacing culverts along Route 2 of the Okeechobee Waterway from Port Mayaca to Moore Haven as part of the Herbert Hoover Dike Rehabilitation Project. Construction consists of steel and earthen cofferdams on the lakeside and landside of the dike to create a self-contained work area. The waterway will be obstructed during installation and removal of the cofferdams and during the process of replacing culverts. Recreational and commercial boaters are asked to use caution when navigating through these sections of waterway. Buoys, lights and reflectorized hazard signs will be placed at each cofferdam to delineate its location and assist boaters through the work zone. Once culvert replacements are complete, the cofferdams will be removed and waterway restored. Construction will occur 5 to 6 days a week with the possibility of night time work. The projects are anticipated to be completed in 2017. Point of contact is Carl Williams at 863-983-8101.

Chart 11428

LNLM: 28/15

**FLORIDA - OKEECHOBEE WATERWAY: Herbert Hoover Dike Rehabilitation Project CULVERTS 10 and 12 (UPDATE: June 17, 2015)**

Thalle Construction Company, Inc. is replacing two culverts along the Okeechobee Waterway near Belle Glade, FL (Culverts 12) and Pahokee, FL (Culvert 10) as part of the overall Herbert Hoover Dike Rehabilitation Project sponsored by the U.S. Army Corps of Engineers. Construction consists of the steel and earthen cofferdams on both the lakeside and landside of the dike to create a self-contained work area. The waterway will be obstructed during the installation and removal of the cofferdams and during the process of replacing the culverts. Recreational and commercial boaters are asked to use caution when navigating through this section of the waterway between the Paul Rardin park boat ramps location (26-44-57.01N/080-41-04.84W) and just north of Palm Beach Glades Airport location (26-47-53.58N/080-41.46.38W). Four (4) obstruction buoys with solar powered lights, reflectorized hazard warning and symbol will be placed at the outermost edge of cofferdams obstructing the waterway to delineate the cofferdam location and guide boaters through the work zone area. Also, two (2) obstruction buoys will be placed in the vicinity of boat ramps. Once the culvert replacements are complete, the cofferdams will be removed and waterway restored. Construction will occur 5 to 6 days a week, with the possibility of night time work. The project is anticipated to be completed in 2017. The Project point of contact is Tim Pernsteiner at 919-282-4674 or tpernsteiner@thalle.com.

**FLORIDA - OKEECHOBEE WATERWAY: Herbert Hoover Dike Rehabilitation Project CULVERTS 10 and 12 (UPDATE: June 17, 2015)**

Chart 11428

LNM: 28/14

**FLORIDA - OKEECHOBEE WATERWAY: Herbert Hoover Dike Rehabilitation Project CULVERT C-3 Replacement Adjacent to the Okeechobee Waterway.**

Mariners transiting the Okeechobee Waterway (OWW) are advised of water based construction activity on the Herbert Hoover Dike. The C3 location is 870,313.9N, 704,735.5E to 870,494.6N, 704,418.6E or from 26° 43' 40.66"N, 80° 51' 4.31"W to 26° 43' 42.45"N, 80° 51' 7.81"W.

Archer Western Construction will be replacing one culvert along the Okeechobee Waterway near Clewiston (Culvert C-3) as part of the overall Herbert Hoover Dike Rehabilitation Project sponsored by the U.S. Army Corps of Engineers. Work is scheduled to be completed September 1, 2016. A 'No Wake Zone' has been established extending 1000 feet either side of the projects to ensure safe management of bi-directional traffic throughout the construction period. Mariners are advised they transit at their own risk. Transiting vessels are restricted to a controlling width of 20-ft minimum through Culvert C-3 project area, limited by a controlling depth of 6ft when the lake is at elevation +11.0-ft Mean Sea Level. Once culvert replacement is complete, the cofferdam will be removed and waterway restored. Construction will occur 5 to 6 days a week, with the possibility of night time work. Reports of vessel grounding have been received. Mariners should be aware of and diligently follow the instructions of signage located along the shoreline. Flagmen will be present as needed to signal vessels to stop or to proceed with caution. Mariners should be prepared to stop their vessel or proceed with caution as directed by flagmen.

Construction consists of steel and earthen cofferdams on both the lakeside and landside of the dike to create a self-contained work area. The waterway will be restricted and may be intermittently obstructed during the installation and removal of the cofferdams and during the process of replacing the culverts.

Recreational and commercial boaters are asked to use caution and be prepared to stop when navigating through this section of the waterway. Additional information concerning Lake Okeechobee, the Okeechobee Waterway and related navigation bulletins including controlling depths may be obtained on Jacksonville District's website at <http://www.saj.usace.army.mil/>

Chart 11428

LNM: 14/15

**FLORIDA - OKEECHOBEE WATERWAY: Herbert Hoover Dike Rehabilitation Project CULVERTS 1 and 1A (UPDATE: 02/17/2015)**

Odebrecht Construction, Inc. is replacing two culverts along the Okeechobee Waterway near Moore Haven (Culverts 1 and 1A) as part of the overall Herbert Hoover Dike Rehabilitation Project sponsored by the U.S. Army Corps of Engineers. Construction consists of the steel and earthen cofferdams on both the lakeside and landside of the dike to create a self contained work area. The waterway will be restricted and may be intermittently obstructed during the installation and removal of the cofferdams and during the process of replacing the culverts. Recreational and commercial boaters are asked to use caution and be prepared to stop when navigating through this section of the waterway between the Alvin L Ward park boat ramps and Uncle Joe's Fish Camp boat ramps. Flagmen will be present as needed to signal vessels to stop or to proceed with caution. The controlling width through Culvert 1A project area is 20ft minimum, limited by a controlling depth of 6ft when the lake is at elevation +11.0ft Mean Sea Level.

Due to the orientation of Culvert C1, construction activities for the western half of the cofferdam will be completed landward of the proposed cofferdam; however it is expected that all the equipment will stay within the limits of the construction, resulting in a navigable channel of approximately 45ft. Once the culvert replacements are complete, the cofferdams will be removed and waterway restored. Construction will occur 5 to 6 days a week, with the possibility of night time work. Signs and navigational markers are in place before the construction area to advise mariners to reduce speed and use caution. The project is anticipated to be completed in August, 2016. The Project point of contact is Christopher Conerly at 225-936-8806 or [cconerly@odebrecht.com](mailto:cconerly@odebrecht.com).

Chart 11428

LNM: 09/12

**FLORIDA - OKEECHOBEE WATERWAY: Herbert Hoover Dike Rehabilitation Project Culvert 2 – CLEWISTON**

Harry Pepper & Associates, Inc. will be replacing one culvert along the Okeechobee Waterway near Clewiston (Culvert C-2) as part of the overall Herbert Hoover Dike Rehabilitation Project sponsored by the U.S. Army Corps of Engineers. Construction will occur 5 to 6 days a week, with the possibility of night time work. Construction consists of steel and earthen cofferdams on both the lakeside and landside of the dike to create a self-contained work area. The coordinates for the work site are as follows; 26°45'51"N, 80°55'32"W. Recreational and commercial boaters are asked to use caution when navigating through this section of the waterway west and adjacent to the Hoover Dike Road City Boat Ramp and Clewiston City Marina and Boat Ramp. All vessels should operate as slow to idle speeds with only enough forward movement to maintain control of the vessel. Boaters are responsible for any damage from boat wakes they create. Two (2) obstruction buoys with solar powered lights, reflectorized hazard warning and symbol will be placed at the outermost edge of cofferdams obstructing the waterway to delineate the cofferdam location and guide boaters through the work zone area. Once the culvert replacements are complete, the cofferdams will be removed and waterway restored. The project is anticipated to be completed in November 2017. For further information contact Mike Nelson, 863-902-1303 or [mnelson@hpepper.com](mailto:mnelson@hpepper.com)

Chart 11428

LNM: 37/15

**FLORIDA - OKEECHOBEE WATERWAY - HARNEY POND CANAL: Replacement of Culverts (Herbert Hoover Dike Rehabilitation Project)**

Thalle Construction Company, Inc. is replacing two culverts along the Harney Pond Canal waterway near Lakeport, FL, located on the Seminole Tribe of Florida property, Culverts HP-2 and Culvert HP-3 as part of the overall Herbert Hoover Dike Rehabilitation Project sponsored by the U.S. Army Corps of Engineers.

Construction consists of the steel cofferdams on both the lakeside and landside of the dike to create a self-contained work area. The waterway will be obstructed during the installation and removal of the cofferdams and during the process of replacing the culverts. Recreational and commercial

**FLORIDA - OKEECHOBEE WATERWAY - HARNEY POND CANAL: Replacement of Culverts (Herbert Hoover Dike Rehabilitation Project)**

boaters are asked to use caution when navigating through this section of the waterway between 27-00-43.522N 081-04-12.738W and 27-00-43.523N 081-04-10.204W.

Nine (9) obstruction buoys with reflectorized hazard warning and symbols will be placed at the outermost edges of the buoys obstructing the waterway to delineate the construction location and guide boaters away from the work zone area. Once the culvert replacements are complete, the cofferdams will be removed and waterway restored. Construction will occur 5 days a week, with the possibility of night time work. The project is anticipated to be completed in January 2019. The Project point of contact is Bill Miller at 336-212-2422 or bmiller@thalle.com.

Chart 11428

LNM: 24/15

**FLORIDA – GIWW – FORT MYERS TO CHARLOTTE HARBOR AND WIGGINS PASS – MOODY CHANNEL Private Aid/Hazard to Navigation.**

Private aid Moody Canal Daybeacon 2 (LLNR 53295) has been reported destroyed and the remains pose a hazard to navigation. Mariners are advised to use extreme caution while transiting the area.

Chart 11427

LNM: 25/16

**FLORIDA - GIWW - CHARLOTTE HARBOR TO TAMPA BAY - SIESTA KEY-TAMPA BAY: Hazard to Navigation.**

Siesta Key-Tampa Bay Light 15 (LLNR 58670) is destroyed. The remains of the steel pile pose a hazard to navigation. Wreckage has been marked with a TRLB, FI Q G, 4M. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11425

LNM: 24/16

**FLORIDA - GIWW - TAMPA BAY - CATS POINT CHANNEL: Hazard to Navigation.**

Cats Point Channel Daybeacon 14 (LLNR 60690) is destroyed. The remains of the concrete pile may pose a hazard to navigation. Wreckage has been marked with a TRLB, FL Q R, 4M light. Mariners are advised to exercise extreme caution while transiting the area.

Chart 11416

LNM: 22/16

**FLORIDA - GIWW - TAMPA BAY TO PORT RICHEY: Hazard to Navigation.**

The Narrows Daybeacon 37 (LLNR 61655) is destroyed and poses a hazard to navigation. A TRUB is set on assigned position. Mariners are advised to exercise caution when transiting the area.

Chart 11411

LNM: 22/16

**SECTION VIII - LIGHT LIST CORRECTIONS**

An Asterisk \*, indicates the column in which a correction has been made to new information

(1) No.	(2) Name and Location	(3) Position	(4) Characteristic	(5) Height	(6) Range	(7) Structure	(8) Remarks
16985	CAPRI PASS LIGHT 9	25-58-19.254N 081-44-36.073W	Q G	16	5	SG on pile.	25/16
17470	Gordon Pass Channel Daybeacon 5	26-05-34.669N 081-47-58.890W			*	SG on pile.	25/16
17490	GORDON PASS CHANNEL LIGHT 6	* 26-05-33.790N 081-47-54.987W	FI R 4s	16	5	TR on pile.	25/16
17505	GORDON PASS CHANNEL LIGHT 9	26-05-48.197N 081-47-54.304W	FI G 4s	16	5	SG on pile.	25/16
17540	NAPLES BAY CHANNEL LIGHT 20	* 26-06-05.295N 081-47-11.485W	FI R 4s	16	5	TR on pile.	25/16
					*		

## SECTION VIII - LIGHT LIST CORRECTIONS (Continued)

(1) No.	(2) Name and Location	(3) Position	(4) Characteristic	(5) Height	(6) Range	(7) Structure	(8) Remarks	
17570	NAPLES BAY CHANNEL LIGHT 24	26-06-45.994N 081-47-11.322W	FI R 4s	16	5	TR on pile.	25/16	
17630	NAPLES BAY CHANNEL LIGHT 32	26-07-45.096N 081-47-25.594W	FI R 4s	16	5	TR on pile.	25/16	
17635	NAPLES BAY CHANNEL LIGHT 34	26-07-51.573N 081-47-29.370W	FI R 2.5s	16	5	TR on pile.	25/16	
30720	Arecibo Light	* 18-28-55.076N 066-41-55.335W	FI W 5s	120	11	White hexagonal tower attached to square flat roofed dwelling. 120	25/16	
32290	Cabo Rojo Light	17-56-00.900N 067-11-32.000W	FI W 20s	121	11	Gray hexagonal tower attached to flat- roofed dwelling 121	Emergency light when main light is extinguished shows FI W 6s nominal range 9 miles.	25/16
34500	Winyah Bay-Charleston Harbor Daybeacon 115	32-48-53.156N 079-45-02.824W				SG-SY on pile.	25/16	
40520	Inlet Harbor Buoy 4	* 29-05-01.825N 080-56-10.448W				Red nun.	25/16	
46380	LAKE WORTH CREEK LIGHT 8	* 26-56-42.321N 080-05-24.147W	FI R 4s	16	5	TR-TY on pile.	25/16	

---



---

**PUBLICATION CORRECTIONS**


---

None

---



---

**ENCLOSURES**


---

**1. Summary of Dredging and Marine Construction**

Weekly updates

**2. Summary of Shoaling and Hazardous Situations**

Weekly updates

**3. Summary of Bridge Construction and Repair/Drawbridge Status**

Weekly updates

**4. Summary of Safe Boating Programs**

Auxiliary Programs and Classes

LNM: 01/15

**5. Summary of Marine Events**

Weekly Updates

LNM: 01/15

**6. Gator Dredging - Turkey Creek Muck Removal Project Map**

Fl, Indian River

LNM: 04/16

**7. Cashman - Project Vicinity Map**

Fl, AICW, Fort Lauderdale

LNM: 19/16

**8. Ebsary Foundation: Marina Project (Seagrass & Sponge Mitigation Area Turbidity Curtain Layout)**

Fl, Miami, Biscayne Bay, Julia Tuttle

LNM: 34/14

**9. Gator Dredging - Excavation Project**

Fl, Hideaway Beach, Tigertail Beach and Marco Gulf Front Beach Fill

LNM: 18/16

**10. Southwind Construction - Project Vicinity Map**

Fl, Ft Myers Beach Harbor, Matanzas Pass Channel

LNM: 20/16

**11. Gator Dredging - A.B.W.I.G. South & Main Channel Project Areas**

Fl, Apollo Beach

LNM: 24/16

**12. Gator Dredging - Project Vicinity Map**

Fl, Big Marco River, Collier Creek

LNM: 25/16

---

S. A. Buschman  
Rear Admiral, U.S. Coast Guard  
Commander, Seventh Coast Guard District

## SUMMARY OF DREDGING/MARINE CONSTRUCTION PROJECTS CURRENTLY IN PROGRESS

**The Coast Guard released Marine Safety Alert 14-15, Don't Fear, Steer Clear of Dredging Equipment Hazards. This Safety Alert brings awareness to the hazards associated with dredging for recreational and commercial vessels. Mariners should be aware of these hazards – see more at: <http://www.uscg.mil/hq/cg5/cg545/alerts/1415.pdf>**

**SC-Charleston-Ashley River** – Marcol/CAPTAIN LEO, completion 30 JUN 2016, POC: Marcol (843) 747-2177, Charts: 11524, Ref: LNM 16/16.

**SC-Charleston Harbor-Cooper River** – Marinex/SAVANNAH, completion 30 SEP 2016, Marinex (843) 722-9083, chart: 11524, Ref: LNM 19/16.

**SC-AICW-Calibogue Sound** – Weeks Marine/Tugs, Dredge reassigned to another project ops re-schedule later date (MAY/JUN 2016), staging area running until further notice. POC: Miguel Cruz, (985) 875-2500 or [macruz@weeksmarine.com](mailto:macruz@weeksmarine.com), charts: 11507, Ref: LNM 07/16, 09/16, 12/16.

**GA-Savannah Harbor and Brunswick Inner Harbor** – Marinex/HAMPTON ROADS, completion 08 JUL 2016, POC: Marinex (843) 722-9083. Ref: LNM 15/16, 22/16, 23/16.

**FL-St Johns-Jacksonville** – Manson/BECHTOLT, POC: Charles Markham (904) 524-7646, completion SEP 2016, chart: 11491, Ref: LNM 47/15.

**FL-AICW-Indian River** – Gator Dredging, Project POC: Tyler McDougal (727) 527-1300 or [tyler@gatordredging.com](mailto:tyler@gatordredging.com), completion 01 JUN 2016, chart: 11472, Ref: LNM 04/16.

**FL-AICW-Fort Lauderdale** – Cashman Dredging/CAPTAIN A.J. FOURNIER, POC: Stephen Tobin, (877) 294-9990 or (888) 280-9630, completion: end of APR 2017, chart: 11470, Ref: LNM 19/16.

**FL-Miami-Biscayne Bay-Julia Tuttle** – Ebsary/Marina Project, POC: Brent Huffman (305) 325-0530 ext 113, completion update: 30 JUN 2016, charts: 11467, 11468, Ref: LNM 33/14, 41/15, 02/16.

**FL-Miami-Norris Cut Channel** - Nicholson Construction/Tunneling, POC: Eugene Mirsky (201) 341-4660, completion end JUL 2016, chart: 11467, Ref: LNM 38/15, 01/16.

**FL-Marco-Hideaway Beach** – Gator Dredging, Project POC: Tyler McDougal (727) 527-1300 or [tyler@gatordredging.com](mailto:tyler@gatordredging.com), completion end of JULY 2016, chart: 11430, Ref: LNM 18/16, 23/16.

**FL-OWW-Route 2** – ACOE/Replacing multiple Culverts along Route 2 from Port Mayaca to Moore Haven POC: Carl Williams (863) 983-8101, completion 2017, chart: 11428, Ref: LNM 28/15.

**FL-OWW-Herbert Hoover Dike Rehab Project** – Thalle Construction/Culverts 10 and 12, POC: Tim Pernsteiner (919) 282-4674 or [tpernsteiner@thalle.com](mailto:tpernsteiner@thalle.com) completion 2017, chart: 11428, Ref LNM 28/14.

**FL-OWW-Herbert Hoover Dike Rehab Project** – Archer Western Construction /Culvert C-3, POC: Buck Rand (813) 849-7500, completion 01 SEP 2016, chart: 11428, Ref: LNM 14/15.

**FL-OWW-Herbert Hoover Dike Rehab Project** – Odebrecht Construction /Culverts 1 and 1A, POC: Christopher Conerly (225) 936-880 or [cconerly@odebrecht.com](mailto:cconerly@odebrecht.com) completion AUG 2016, chart: 11428, Ref: LNM 09/12, 40/12, 07/15.

**FL-OWW-Herbert Hoover Dike Rehab Project** – Harry Pepper & Assoc/Culvert C-2, POC: Mike Nelson (863) 902-1303 or [mnelson@hpepper.com](mailto:mnelson@hpepper.com), completion NOV 2017, chart: 11428, Ref: LNM 37/15.

**FL-OWW-Harney Pond Canal** – Thalle Construction/Culverts HP-2 and HP-3, POC: Bill Miller (336) 212-2422, or [bmiller@thalle.com](mailto:bmiller@thalle.com), completion JAN 2019, chart: 11428, Ref: LNM 23/15.

**FL-Ft Myers-Matanzas Pass** – Southwind Construction/WILKO, POC: Darren Stewart (812) 455-7199, completion 01 AUG 2016, chart: 11427, Ref: LNM 20/16.

**FL-Big Marco River-Collier Creek** – Gator Dredging, Project POC: Tyler McDougal (727) 527-1300 or [tyler@gatordredging.com](mailto:tyler@gatordredging.com), completion end of 29 JUL 2016, chart: 11430, Ref: LNM 25/16.

**FL-Apollo Beach** – Gator Dredging, Project POC: Tyler McDougal (727) 527-1300 or [tyler@gatordredging.com](mailto:tyler@gatordredging.com), completion end of JUL 2016 (First Phase) Chart: 11416, Ref: LNM 19/16, 23/16.

**FL-West Coast-Long Boat Key Pass-Bradenton Beach** – Cayo Inc/Barge GRANITE II and Tug EMMA D, POC: (903) 360-5176, completion JUL 2016, chart: 11425, Ref: LNM 11/15, 51/15.

**FL-West Coast-Port of Tampa** – Orion/DRAVO, POC: Justin Chorlog (813) 835-2847, completion 15 APR 2017, chart: 11416, Ref: LNM 38/14, 32/15, 38/15, 19/16.

**West Indies-Puerto Rico-Bahia De San Juan** – Manson/Isla Grande Terminal, Manson (206) 220-7280, completion 01 JUN 2016, chart: 25670, Ref: LNM 46/15.

# SHOALING

The below list is not all inclusive. The U.S. Army Corps of Engineers publishes Channel Condition Surveys and Hydrographic Surveys that may be found on the Charleston, Savannah, and Jacksonville District US Army Corps of Engineers websites.

Charleston District: <http://www.sac.usace.army.mil/>

Savannah District: <http://www.sas.usace.army.mil/>

Jacksonville District: <http://www.saj.usace.army.mil/>

LOCATION	SIGNIFICANT INFORMATION
<b>SC-AICW-Winyah Bay Charleston Harbor</b> Chart: 11518 Ref: LNM 44/13	Shoaling reported IVO Winyah Bay-Charleston Harbor DBN 35A (LLNR 34237) and DBN 37 (LLNR 34240). The ACOE has no future plans for dredging due to budget restrictions. Further information can be found on the ACOE Charleston website <a href="http://www.sac.usace.army.mil/">http://www.sac.usace.army.mil/</a>
<b>SC-AICW-Winyah Bay Charleston Harbor</b> Chart: 11518 Ref: LNM 35/13, 36/14	Shoaling reported northeastern tip of the Ashepoo-Coosaw Cutoff near Ashepoo-Coosaw LT 177 (LLNR 35195). Another area is at the southwestern tipoff the Ashepoo-Coosaw cutoff between Ashepoo-Coosaw C/O DBN 180 (LLNR 35195.3) and DBN 185(LLNR 35205.2) The ACOE has no future plans for dredging due to budget restrictions. Further information can be found on the ACOE Charleston website <a href="http://www.sac.usace.army.mil/">http://www.sac.usace.army.mil/</a>
<b>GA/FL-St Marys River</b> Chart: 11503 Ref: LNM 19/14	Excessive shoaling protruding approximately 15ft into the channel between St Marys River DBN 6 (LLNR 6805) and DBN (LLNR 6810) reestablished TRUB Buoy 6A in position 30-42-52.379N 081-32-00.613W
<b>FL-AICW-Fernandina River</b> Chart: 11489 Ref: LNM 19/14	Excessive shoaling visible at low-tide IVO Fernandina Beach LT 3 (LLNR 37990) reestablished. Fernandina Beach TRUB 2 in position 30-38-54.689N/081-29-03.486W
<b>FL-AICW-Gunnison Cut</b> Chart: 11489 Ref: LNM 20/14	Extreme shoaling at low-tide IVO Gunnison Cut DBN 73 (LLNR 38270) in position 30-26 46.733N/081-26-54.250W
<b>FL- Indian River South Section</b> Chart: 11472 Ref: LNM 21/16	Indian River (South Section) Lighted Buoy 188A has been temporarily established in position 27-27-02.163N/080-18-54.202W to mark a shoal encroaching the channel from the west. Water depths were found as low as 4ft in the channel.
<b>FL-Gordon Pass Channel</b> Chart: 11430 Ref: LNM 06/16	Gordon Pass Daybeacon 1 (LLNR 17453) relocated to 26-05-27.605N/081-48-26.265W Gordon Pass Channel Light 2 (LLNR 17455) replaced by A TRLB displaying FI R 4s, 3NM Gordon Pass Shoal Light (LLNR 17450) established in position 26-05-29.905N/081-48-26.427W displaying FI Q W, 3NM
<b>FL-New Pass (Lee County)</b> Chart: 11427 Ref: LNM 15/16	Shoaling is occurring from Private aid New Pass Lighted Buoy 1 (LLNR 17964) position 26-22-19.080N/081-52-27.960W to Buoy 4 (LLNR 17970) position 26-22-38.460N/081-52-09.330W.
<b>FL- Big Carlos Pass</b> Chart: 11427 Ref: LNM 15/16	Shoaling is occurring from Private aid Big Carlos Pass Lighted Buoy 1 (17975) position 26-23-11.760N/081-53-27.100W to the SR 865 Big Carlos Pass Bridge.
<b>FL-Matanzas Pass Channel</b> Chart: 11427 Ref: LNM 20, 21 and 25/15	Relocated - TEMP Buoy 2A to 26-27-53.609N/081-58-10.667W DBN 4 (LLNR 18095) 26-27-55.554N/081-58-08.442W LT 5 (LLNR 18107) 26-27-56.855N/081-58-09.880W DBN 6 (LLNR 18110) 26-27-57.826N/081-58-04.171W  <a href="http://www.saj.usace.army.mil/Portals/44/docs/Navigation/hydro_surveys/14-101.pdf">http://www.saj.usace.army.mil/Portals/44/docs/Navigation/hydro_surveys/14-101.pdf</a>

<p><b>FL-Big Sarasota Pass</b> Chart: 11425 Ref: LNM 20/16</p>	<p>Mariners are advised to exercise extreme caution and use local knowledge of BIG SARASOTA PASS and its conditions due to shoaling before attempting passage through Big Sarasota Pass Channel, Shoal Daybeacon A (LLNR 21465) position 27-15-58.000N/ 082-33-53.000W to Daybeacon 15A (LLNR 21530) position 27-18-17.609N/082-33-37.740W. Private Buoys are not charted due to constantly shifting shoals and Buoys may not signify best water.</p>
<p><b>FL-New Pass</b> Chart: 11425 Ref: LNM 47/15, 02/16, 04/16, 09/16</p>	<p>The Coast Guard no longer recommends using New Pass due to significant dangerous shoaling. Temporarily discontinue the following floating aids to navigation: New Pass Channel Buoy 1 (LLNR 21590) New Pass Channel Buoy 2 (LLNR 21595) New Pass Channel Buoy 3A (LLNR 21600) New Pass Channel Buoy 4 (LLNR 21603) New Pass Channel Buoy 5 (LLNR 21605) New Pass Channel Buoy 5A (LLNR 21610) New Pass Entrance Channel Light NP (LLNR 1345/21585) will be renamed NEW PASS SHOAL LIGHT with NW dayboards labeled "DANGER SHOAL" FI Q W, 3NM New Pass Channel Light 7 (LLNR 21620) will be renamed NEW PASS INTERIOR SHOAL LIGHT with NW dayboards labeled "DANGER SHOAL" FI Q W, 3NM</p>
<p><b>FL- Longboat Pass</b> Chart: 11424 Ref: LNM 38/14, 12/15, 16/15</p>	<p>Longboat Pass Approach LT (LLNR 1350/21755) relocated to 27-25-50.747N/082-41-40.341W Longboat Pass DBN 1 (LLNR 21757) temporarily changed to TRUB 1 relocated to 27-25-55.788N/082-41- 43.138W Longboat Pass DBN 2 (LLNR 21758) temporarily changed to TRUB 2 relocated to 27-25-56.232N/082-41-40.045W Temp established TRUB 2A at 27-26-22.076N/082-41-39.324W Longboat Pass DBN 3 (LLNR 21760) temporarily changed to TRUB 3 relocated to 27-26-10.131N/082-41-46.746W Temp established TRUB 3A at 27-26-20.809N/082-41-43.716W</p>
<p><b>FL-Pass A Grille</b> Chart: 11411 Ref: LNM 19/16</p>	<p>Report of shoaling in Pass-A-Grille Channel in the vicinity of Daybeacon 7A (LLNR 25485) 27-40-38.910N/082-44-40.387W</p>
<p><b>FL-Johns Pass Channel</b> Chart: 11411 Ref: LNM 48/14</p>	<p>Entrance to Johns Pass Channel project depth 10ft. ACOE surveys found the project depth between Johns Pass Ch LT 2 (LLNR 25585) and LT 4 (LLNR 25600) reported soundings as low as 7.5ft. Shoaling exists between Johns Pass DBN 8 (LLNR 25625) and LT 10 (LLNR 25630) with Soundings as low as 3.6ft along the northern side of the channel.</p> <p>Severe Shoaling reported on the north side of the channel between Johns Pass Channel Daybeacon 1 (LLNR 25580) 27-46-37.333N/ 082-47-37.083W and Buoy 3 (LLNR 25585.5) 27-46-39.531N/ 082-47-18.862W Ref: LNM 19/16</p>
<p><b>FL-Hurricane Pass Channel</b> Chart: 11411 Ref: LNM 25/16</p>	<p>Shoaling has been reported in the vicinity of Hurricane Pass-Gulf of Mexico-Pinellas County, between Private aids Hurricane Daybeacon 1 (25975) position 28-03-20.040N/082-49-50.640W and Daybeacon 18 (26025.5) position 28-02-53.820N/082-47-45.060W.</p>
<p><b>FL-Anclote Anchorage S Entrance</b> Chart: 11411 Ref: LNM 42/14</p>	<p>Shoal exists with a depth of 2ft at high tide in approximate position 28-09-12.60N/082-50-12.00W the shoal runs NW to SE between DBN 5 (LLNR 26085) and LT 7 (LLNR 26100) and extending across the channel. The Lateral Daymarks have been removed from Daybeacon 5 (LLNR 26085) and 6 (LLNR 26095) and replaced with non-lateral white daymarks worded "Danger Shoal". Established TRUB 5 in position 28-09-04.908N/082-50-20.881W and TRUB 5A in position 28-09-16.279N/082-50-10.078W.</p>
<p><b>FL-Anclote River</b> Chart: 11411 Ref: LNM 31/14</p>	<p>Shoaling reported in the center of the Turning Basin IVO Anclote River DBN 51 (LLNR 26360) at 28-09-24.672N/082-45-32.307W and DBN 53 (LLNR 26365) 28-09-24.744N/082-45-29.448W</p>
<p><b>FL-Cedar Keys Main Channel</b> Chart: 11408 Ref: LMN 23/15, 28/15</p>	<p>Report of shoaling between Cedar Keys North West Channel LT 19 (LLNR 29995) 29-07-08.057N/083-03-06.291W and DBN 22 (LLNR 30010) 29-07-08.117N/083-02-58.731W with depths as low as 1ft at low tide.</p>

<b>FL- Matlacha Pass</b> Chart: 11426 Ref: LNM 16/15	Shoaling reporting IVO Private Aid Matlacha Pass DBN 56 (LLNR 55140) 26-38-06.864N/082-04-14.028W
--	---

## BRIDGE CONSTRUCTION/REPAIR

LNM 25-16

06/21/2016

## SPECIAL NOTICE:

Location	Type of Work	EST Comp Date	Bridge	Ref LNM
SC-ICW-Myrtle Bch	Bridge Construction	MAY 17	SC 31/Carolina Bay Pkwy	07-14
SC-Wando River	Bridge Construction	MAR 17	Wando Riv Bridge	34-15
FL-ICW- St Simons Snd to Tolomato Riv	Bridge Construction	SEP 16	Sister's Creek	05-15/14-16
FL-St Johns Riv-Jacksonville	Bridge Repairs	JAN 17	Dames Pt/I-295 Bridge	22-16
FL-St Johns Riv-Jacksonville	Bridge Repairs	APR 17	Main St Bridge	23-16
FL-St Johns Riv-Sanford	Bridge Construction	DEC 15	SR 415 Bridge	48-12/45-14
FL-ICW-Halifax Riv-Daytona Bch	Bridge Construction	NOV 18	Veteran Memorial Bridge	23-16
FL-ICW-Tolomato Riv – Palm Shores-Cocoa	Bridge Repairs	JAN 17	SR 520 Bridge	10-16
FL-ICW-Tolomato Riv – Palm Shores-Cocoa	Bridge Repairs	DEC 16	John F Kennedy/NASA Pkwy	11-16
FL-ICW-Ft Pierce to West Palm – Jupiter	Bridge Repairs	AUG 16	Jupiter Fed Bridge	22-16
FL-ICW-W Palm Bch – Palm Bch	Bridge Construction	SEP 16	Flagler Memorial Bridge	01-12/32-12
FL-ICW-W Palm Bch – Miami – Middle Riv	Bridge Construction	JUL 16	E Sunrise Blvd Bridge	08-14
FL-ICW-W Palm Bch – Miami – New River	Bridge Construction	JUN 16	CSX R/R Bridge	50-13
FL-ICW-W Palm Bch – Miami – Dania Bch	Bridge Repairs	APR 16	Dania Bch Blvd Bridge	49-15
FL-ICW-W Palm Bch – Miami – Dania Cutoff	Bridge Construction	MAY 17	Ravenswood Rd Bridge	38-15
FL-ICW-W Palm Bch – Miami – Sunny Isles	Bridge Construction	DEC 16	Town Center Park Canal Bridge	11-16
FL-ICW-W Palm Bch – Miami	Bridge Repairs	JUN 16	Broad Cswy Bridge	13-14
FL-ICW-W Palm Bch – Miami	Bridge Repairs	DEC 16	E Venetian Bridge	15-16
FL-Miami Riv	Fender Repairs	DEC 16	I-95 Bridge	52-15
FL-Miami Riv-Miami Canal	Bridge Construction	JAN 17	Tamiami Canal Bridge	12-16
FL Keys – Largo	Bridge Repairs	APR 17	Card Snd Rd Bridge	11-16
FL-Charlotte Hbr – E Spring Lake	Bridge Construction	NOV 16	Edgewater Dr Bridge	06-15
FL-Charlotte Hbr – W Spring Lake	Bridge Construction	NOV 16	Edgewater Dr Bridge	06-15
FL-Charlotte Hbr – Sunrise W/W	Bridge Construction	NOV 16	Edgewater Dr Bridge	06-15
FL-OWW – Caloosahatchee Riv	Bridge Repairs	OCT 16	SR 45/US 41 Bridge	21-16
FL-Hurricane Bay	Scour Protection	NOV 16	Under SR 865 Bridge	23-16
FL-ICW-Gasparilla	Bridge Construction	JUL 16	Gasparilla Island Bridge	04-14
FL-Charlotte Hbr – Myakka Riv	Bridge Repairs	OCT 16	SR 776 Bridge	21-16
FL-ICW-Charlotte Hbr to Tampa Bay	Bridge Repairs	MAY 16	Stickney Pt Bridge	15-15/14-16
FL-Tampa Bay-Manatee Riv	Bridge Construction	FEB 17	Fort Hamer Bridge	31-15
FL-Tampa Bay-Hillsborough River	Bridge Repairs	AUG 16	Laurel St Bridge	20-16
FL-Tampa Bay – Old Tampa Bay	Bridge Demolition	DEC 16	Friendship Bridge	37-15
FL-ICW-Tampa Bay – Anclote	Bridge Repairs	JUN 16	Single-leaf Ops	20-16

## B. DRAWBRIDGE STATUS SUMMARY

The following is a list of known drawbridge discrepancies, restrictions, and closures in navigable waters of the Seventh Coast Guard District. Additional information regarding bridges can be found in Volume 4 (Cape Henry to Key West) or Volume 5 (Gulf of Mexico, Puerto Rico and Virgin Islands) of the U.S. Coast Pilot, 33 CFR 117, or by calling (305) 415-6744. Unless otherwise noted in the date column, the described status will be in effect until further notice. Mariners knowing of bridge activities not listed below are urged to notify the Seventh Coast Guard District Bridge Branch.

BRIDGE	LOCATION	DATE	STATUS	REF
US 17	Ashley Riv, Char, SC	Until further notice	Single-leaf Ops	22-16
Main St	St Johns Riv, Jacksonville	Jul 23, 2016		
		6:45 pm – 7:45 pm	Closed to Nav	23-16
CSX – Trout Riv	Trout Riv, Jacksonville, FL	Until further notice	Special Regs	09-15
Bridge of Lions	AICW, St Augustine, FL	Jul 4, 2016		
		8:30 pm – 10:30 pm	Closed to nav	25-16
Bridge of Lions	AICW, St Augustine, FL	Jul 16, 2016		
		7:30 am – 8 am	Closed to nav	14-16
John F Kennedy/NASA Pkwy	AICW, Canaveral, FL	See Article Below	Special Regs	24-16
Flagler Memorial	AICW, W Palm Bch, FL	Until further notice	Special Regs	12-13
Flagler Memorial/Royal Park/ Southern Blvd	AICW, W Palm Bch, FL	Jul 4, 2016		
		9 pm – 11 pm	Closed to nav	25-16
Lake Worth (Robert Harris)	AICW, Lake Worth, FL	Jul 4, 2016		
		8:50 pm – 9:50 pm	Closed to Nav	22-16
NE 8 St (George Bush)/ E Atlantic Ave/Linton Blvd	AICW, Delray Beach, FL	Jul 4, 2016		
		8 pm – 11:30 pm	Closed to Nav	24-16
Hillsboro Blvd	AICW, Deerfield Bch, FL	Apr 1 – Jun 20, 2016		
		7 am – 5 pm	Single-leaf Ops	13-16

Hillsboro Blvd	AICW, Deerfield Bch, FL	Jul 4, 2016 7 pm – 11 pm	Closed to Nav	21-16
NE 14 <sup>th</sup> St/Atlantic Blvd	AICW, Pompano Bch, FL	Jul 4, 2016 9 pm – 11 pm	Closed to Nav	14-16
Hillsboro Blvd	AICW, Ft Laud, FL	Jul 4, 2016 9 pm – 11 pm	Closed to Nav	21-16
Commercial Blvd	AICW, Ft Laud, FL	Jul 4, 2016 9 pm – 11 pm	Closed to Nav	22-16
Dania Bch/Sheridan Hollywood Blvd	AICW, Ft Laud, FL	Jul 4, 2016 8 pm – 11:30 pm	Closed to Nav	22-16
Broad Cswy	AICW, Miami, FL	Until Jun 30, 2016	Single-leaf Ops	22-16
East Venetian	Indian Cr, Miami, FL	Until Further Notice	Closed to Nav	49-14/10-16
Stickney Pt/Siesta Key	GICW, Siesta Key, FL	Jul 4, 2016 9 pm – 11:59 pm	Closed to Nav	19-16
Welch Cswy	GICW, St Pete, FL	Until Aug 15, 2016	Single-leaf Ops	24-16/25-16
Dunedin	GICW, Dunedin, FL	11 pm Jul 3 - 2 am Jul 4, 2016	Closed to Nav	19-16

### C. BRIDGE INFORMATION.

SOUTH CAROLINA – CHARLESTON HARBOR – ASHLEY RIVER – US 17 BRIDGE: [Single-leaf Operations.](#)

Due to a malfunction the US 17 Bridge across the Ashley River, Charleston, South Carolina is currently on single-leaf operations until further notice.

Ref: LNM 22 through 24-16

Chart: 11524

SOUTH CAROLINA – CHARLESTON HARBOR – WANDO RIVER – WANDO RIVER (SC 41) BRIDGE: [Bridge Construction.](#)

The South Carolina Department of Transportation has advised the Coast Guard that their contractors PCL Civil Constructors Inc are currently working on building the new Wando River(SC 41) Bridge, South Carolina. The contractor will have floating equipment in the waterway during this project. This project is expected to be completed in March 2017.

Update: The South Carolina Department of Transportation is currently conducting repairs on the SC41 Bridge across the Wando River. The repairs will finish on June 2, 2016. The bridge will remain open to navigation during the maintenance. Vessels are urged to use caution while transiting the area.

The tug "MRS BRIDGETTE" will be on scene and will be positioned outside of the navigational channel.

For on-scene communications, contact the tug "MRS BRIDGETTE" on VHF-FM channels 13 and 16. For questions regarding the maintenance, please contact the South Carolina Specialized Bridge Division at: (843) 740-1695. If you have additional questions or concerns regarding this matter, please contact Coast Guard Sector Charleston at: (843) 740-7050.

Ref: LNM 34-15 through 24-16

Chart: 11524

FLORIDA – ST JOHNS RIVER – DAMES POINT (I-295) BRIDGE: [Bridge Repairs.](#)

M&J Construction has advised the Coast Guard that they will be working on the Dames Point/I-295) Bridge across the St Johns River, Jacksonville, Florida from June 2, 2016 through January 2017. There will be floating equipment in the vicinity of the bridge; but they do not anticipate restriction navigation during these repairs.

Ref: LNM 22 through 24-16

Chart: 11491

FLORIDA – ST JOHNS RIVER – MAIN STREET BRIDGE: [Bridge Repairs.](#)

M&J Construction has advised the Coast Guard that they will be working on the Main Street Bridge across the St Johns River, Jacksonville, Florida from June 6, 2016 through April 6, 2017. The bridge operations schedule has been temporarily changed to allow the time needed to complete these repairs; therefore from June 6, 2016 through April 6, 2017, Monday through Friday except Federal holidays the Main Street Bridge will only open at 12 midnight, 4:00 a.m., 6:45 a.m., 12 noon, 4:15 p.m. and 8:00 p.m. On Saturdays, Sundays, Federal holidays, Jaguars game days, the weeks leading up to the Florida/Georgia and ND/Navy football games, and for any other unforeseen event that would seriously impact navigation the bridge will operate on its normal schedule. There will be floating equipment in the vicinity of the bridge; but they do not anticipate restriction navigation during these repairs.

Please contact Mr. Alan Dale: 561.818.9534 or Mr. Eddie Beard: 904.652.3237 for updates.

Ref: LNM 23 and 24-16

Chart: 11491

FLORIDA – ST JOHNS RIVER – MAIN STREET BRIDGE: [Bridge Closure.](#)

The Main Street Bridge across the St Johns River, Jacksonville, Florida will be closed to navigation from 6:45 p.m. to 7:45 p.m. on July 23, 2016 to facilitate the Vestcor 5K event. Vessels that may pass through the bridge without an opening may do so at any time.

Ref: LNM 23 and 24-16

Chart: 11491

FLORIDA – ST JOHNS RIVER – TROUT RIVER – CSX RAILROAD BRIDGE: Bridge Closure.

The Coast Guard has been advised that the CSX Railroad Bridge across Trout River, Jacksonville, Florida will be opened to navigation from 9:00 a.m. to 3:00 p.m. each day, except for the possibility of one train crossing during this time. The bridge will remain closed to navigation from 3:00 p.m. to 9:00 a.m. and will be unable to open under any circumstances. The estimated time of repair is unknown. The Coast Guard Captain of the Port Jacksonville will provide updates via Broadcast Notice to Mariners. The vertical clearance of the CSX R/R Bridge in the closed position is 2 feet.

Ref: LNM 09-15 through 24-16

Chart: 11491

FLORIDA – ST. JOHNS RIVER – LAKE DEXTER TO LAKE HARVEY – SANFORD – SUNRAIL BRIDGE: Bridge Repairs/Restrictions.

The Florida Department of Transportation has advised the Coast Guard that they will be working on the Sunrail Railroad Bridge west of the I-4 Bridge, across the St Johns River, Sanford, Florida.

The Coast Guard will allow this bridge to not open to navigation from 5:00 a.m. to 8:15 p.m. daily Monday through Friday except that the bridge will be open to navigation from 10:30 a.m. and 11:30 a.m. and 1:15 p.m. to 2:30 p.m. On weekends and Federal holidays, this bridge will be on its normal operating schedule.

This bridge has a vertical clearance of eight feet in the closed to navigation position at Mean High Water. Vessels that may pass through the bridge without an opening may do so at any time.

This work is anticipated to start on June 23, 2016 and will last approximately 12 weeks.

Chart: 11498

FLORIDA – ST. JOHNS RIVER – LAKE DEXTER TO LAKE HARVEY – SANFORD – SR 415 BRIDGE: Bridge Construction.

UIG Construction has advised the Coast Guard that they will be restricting the channel under the SR 415 Bridge across the St. Johns River, Sanford, Florida during construction of the new bridge. There will be short delays up to 10 minutes of waterway closures when materials are being transferred to and from the barge. The project will start in January 2015.

Orion Marine Construction has advised that they will have floating equipment in the area. Mariners should proceed with caution and minimum wake.

Ref: LNM 48-12 through 24-16

Chart: 11498

CG File: 3848

FLORIDA – MIAMI ENTRANCE CHANNEL – MIAMI BEACH CHANNEL – EAST VENETIAN BRIDGE: Bridge Discrepancy.

The East Venetian Bridge is closed to navigation until further notice, due to mechanical/electrical issues.

Miami-Dade County has advised the Coast Guard that they will need an additional time to repair the East Venetian Bridge to operational status. Therefore, this bridge will remain closed to navigation until approximately December 30, 2016.

Ref: LNM 39-14 through 24-16

Chart: 11467

FLORIDA – MIAMI ENTRANCE – MIAMI RIVER: Fender System Damage.

The I-95 Bridge Fender System across the Miami River, Miami, Florida, has been damaged. Mariners are requested to use caution in this area. The bridge owner will be repairing this system in the near future. Waterway restrictions are anticipated.

Ref: LNM 52-15 through 24-16

Chart: 11467

FLORIDA - MIAMI HARBOR - MIAMI RIVER - SW 1ST STREET BRIDGE: Special Bridge Notice.

The Coast Guard has issued a public notice announcing a permit application from the Florida Department of Transportation, for the approval of location and plans for the replacement of a bridge over the Miami River, mile 0.9, also known as the SW 1st Street Bridge, at Miami, FL. Public Notice 02-16 provides details of the proposed bridge project and solicits comments concerning the project. The public notice is available at <http://www.navcen.uscg.gov/?pageName=pnBridges&Active=1&region=7>.

Chart: 11467

FLORIDA – MIAMI ENTRANCE – MIAMI RIVER – MIAMI CANAL – TAMIMIAMI CANAL BRIDGE: Bridge Construction.

The U.S. Coast Guard has authorized the closure of the Miami Canal, Miami, Florida, due to the removal of the Tamimai Canal Swingbridge. The Miami Canal will be closed to navigation from 7:00 a.m. on March 30, 2016 through 7:00 a.m. on April 3, 2016. After this date that contractor, Archer Western will need various short waterway restriction while the new bridge is being build. This work is expected to continue until February 14, 2018.

Ref: LNM 11 through 24-16

Chart: 11467

FLORIDA – GULF COAST – MATANZAS PASS – ESTERO PASS – HURRICANE BAY: SR 865 BRIDGE: Scour Countermeasures/Waterway Restrictions.

Coastal Marine Construction will be installing scour countermeasures under the SR 865 Bridge across Hurricane Bay from July 2016 through November 2016. There will be floating equipment in the vicinity of the bridge and at times the waterway will be closed. Contact the on-scene tug on VHF-FM channels 13/16 for additional information.

Ref: LNM 23 and 24-16

Chart: 11427

FLORIDA – ESTERO BAY TO LEMON BAY – CHARLOTTE HARBOR – EAST AND WEST SPRING LAKE AND SUNRISE WATERWAY – EDGEWATER DRIVE BRIDGE: Bridge Construction.

Thomas Marine Construction, Inc has advised the Coast Guard that they are replacing and widening three bridges along the Edgewater Driver Corridor in Port Charlotte across the East Spring Lake, West Spring Lake and Sunrise Waterway. This work is anticipated to start on March 2, 2015 and will be completed on November 30, 2016. The contractor anticipated leaving one of the spans open at all times for marine traffic. Any channel restrictions or temporary closures will be coordinated with the Coast Guard and published in the Local Notice to Mariners.

Ref: LNM 08-15 through 24-16

Chart: 11426

FLORIDA – GULF COAST – ESTERO BAY TO LEMON BAY INCLUDING CHARLOTTE HARBOR – MYAKKA RIVER – SR 776 BRIDGE: Bridge Repairs.

Inland Construction and Engineering, Inc. has advised the Coast Guard that they will be working on the SR 776 Bridge across the Myakka River, Charlotte Harbor, Charlotte County, Florida from May 24 through October 22, 2016. Work conducted will involve concrete repairs to the bridge pilings. Repairs will be performed on floating platforms including barges. The work conducted is not expected to impact vessel traffic through the main channel. Mariners are requested to proceed with caution.

Ref: LNM 21 through 24-16

Chart: 11426

FLORIDA – WEST COAST – TAMPA BAY – MANATEE RIVER – FORT HAMER BRIDGE: Bridge Construction.

Johnson Brothers Corporation has advised the Coast Guard that they have begun work on the Fort Hamer Bridge across the Manatee River, Manatee County, Florida. The contractor will have floating equipment in the area starting July 24, 2015. Anticipated waterway restrictions/closures will start in April 2016 through December 2016. This estimated time of completion is February 28, 2017.

Ref: LNM 30-15 through 24-16

Chart: 11415

FLORIDA – TAMPA BAY – HILLSBOROUGH RIVER – LAUREL STREET BRIDGE: Bridge Repairs.

All mariners be advised that the Laurel Street Bridge across the Hillsborough River, Tampa, Florida will be under construction from May 30, 2016 through July 8, 2016. The construction will require a 72 hours notification with an 8 hour emergency notice. The construction will include floating equipment in the vicinity of the bridge. Mariners are advised to stay clear of all construction equipment and use extreme caution with transiting this area. For questions contact Royal Bridge Inc. at 727-934-6042 for further details.

Ref: LNM 20 through 24-16

Chart: 11416

FLORIDA – TAMPA BAY – OLD TAMPA BAY – GANDY (FRIENDSHIP) BRIDGE: Bridge Deterioration/Demolition.

American Bridge Co. has started a demolition project on the Friendship Trail Bridge on the waters of Old Tampa Bay in Tampa, FL. A floating barge will be stationed approximately 10 feet from the fender system outside the channel for the duration of the project.

The contractor has advised that they will be working in the vicinity of the center span of the Gandy Bridge from 8:00 a.m. to 5:00 p.m. until approximately May 20, 2016.

This demolition project will continue until an approximate date of December 31, 2016. Normal work hours for the project will be Monday-Thursday from 7:00 am to 5:30 p.m. and Friday from 7:00 a.m. to 3:30 p.m.

All mariners are urged to use caution when transiting the area. Contact Ray Hagen, Project Manager at: 813-254-4127 with any questions or concerns.

Ref: LNM 53-14 through 24-16

Chart: 11416

SOUTH CAROLINA – ATLANTIC INTRACOASTAL WATERWAY – CAPE FEAR RIVER TO CASINO CREEK – MYRTLE BEACH – SC 31 (CAROLINA BAYS PARKWAY) BRIDGE: Bridge Construction.

The South Carolina Department of Transportation has hired Flatiron Constructors Inc. who has started building the SC 31, Carolina Bays Parkway, Myrtle Beach, Horry County, South Carolina. This project is anticipated to be completed by May 17, 2017 and will involve some

waterway restrictions/closures. These channel restrictions/closures anticipated for this project will be published in future Local Notice to Mariners.

Ref: LNM 07-14 through 24-16

Chart: 11534

SOUTH CAROLINA – ATLANTIC INTRACOASTAL WATERWAY – CAPE FEAR RIVER TO CASINO CREEK – LADY’S ISLAND/WOOD MEMORIAL BRIDGE: Notice of Proposed Rulemaking.

The Coast Guard proposes modifying the operating schedule that governs the Lady’s Island Bridge, across the Beaufort River, Mille 536.0 at Beaufort, SC. This modification would allow Lady’s Island Bridge to remain closed during peak vehicular traffic times. The bridge owner, South Carolina Department of Transportation, requested this action to assist in reducing traffic caused by bridge openings. We invite your comments on this proposed rulemaking.

Comments and related material must reach the Coast Guard on or before July 11, 2016.

You may submit comments identified by docket number USCG-2015-0343 using the Federal eRulemaking Portal at <http://www.regulations.gov>.

Ref: LNM 20 through 24-16/Docket Number USCG-2015-0343

Chart: 11485

FLORIDA - ATLANTIC INTRACOASTAL WATERWAY - ST SIMONS SOUND TO TOLOMATO RIVER - HECKSHER DRIVE/SISTERS CREEK BRIDGE: Bridge Construction.

Archer Western Contractors, LLC has advised the Coast Guard that they are working on constructing the new High-Level Fixed Sisters Creek Bridge across the Atlantic Intracoastal Waterway, mile 739.2, Jacksonville, Duval County, Florida.

\*\* UPDATE \*\*

The navigational channel at Sisters Creek Bridge will be restricted to a 35-foot horizontal clearance intermittently from 7 a.m. to 7 p.m., from April 1st until June 10, 2016 for the installation of the fendering system  
If your vessel has a wider beam and needs to pass, contact the bridge tender to make arrangements.

The demolition of existing bridge is planned for July through September 2016.

There will be no clearance restrictions for the following dates: 5/28-30 and 7/18-23.

Ref: LNM 05-15 through 24-16

Chart: 11489

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – ST SIMONS SOUND TO TOLOMATO RIVER – BRIDGE OF LIONS: Bridge Closure.

The Bridge of Lions across the Atlantic Intracoastal Waterway, St Augustine, Florida will be closed to navigation from 8:30 p.m. to 10:30 p.m. on July 4, 2016 to facilitate the a 4<sup>th</sup> of July Celebration event.. Vessels that may pass through the bridge without an opening may do so at any time.

Chart: 11489

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – ST SIMONS SOUND TO TOLOMATO RIVER – BRIDGE OF LIONS: Bridge Closure.

The Bridge of Lions across the Atlantic Intracoastal Waterway, St Augustine, Florida will be closed to navigation from 7:30 a.m. to 8:00 a.m. on July 16, 2016 to facilitate the Annual Bridge of Lions 5K Walk/Run event. Vessels that may pass through the bridge without an opening may do so at any time.

Ref: LNM 14 through 24-16

Chart: 11489

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – HALIFAX RIVER: Replacement of the Veterans Memorial Bridge.

Johnson Brothers Corporation will commence the deconstruction and rebuilding of the Veterans Memorial Bridge in Daytona Beach, FL. The project will begin on June 6th, 2016 and run until November 2018. The project will include the construction of a trestle to assist with the deconstruction and rebuilding of the entire span of the bridge. Although there are no restrictions to the navigational channel at this time, anticipate future closures and restrictions during this project. They will be posted in subsequent versions of this publication. Recreational and commercial boaters are advised to use extra precaution when navigating through this section of the waterway. For more information contact Project Manager Jim Charles at (321) 200-3147.

Ref: LNM 23 and 24-16

Chart: 11485

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – TOLOMATO RIVER TO PALM SHORES – CORONADO BEACH (GEORGE MUSSON) BRIDGE: Notice of Proposed Rulemaking.

The Coast Guard proposes modifying the operating schedule that governs the Coronado Beach (George Musson) Bridge across the Atlantic Intracoastal Waterway mile 845, New Smyrna Beach, FL. This proposed rule would change the existing 20 minute opening

schedule to a 30 minute opening schedule between 7 a.m. and 7 p.m. This action would provide some relief to vehicle traffic congestion and would have little to no effect on navigation. The proposed rule will also add the local bridge name to the regulation published in the Code of Federal Regulations, George Musson/Coronado Beach (SR 44). We invite your comments on this proposed rulemaking. Comments and related material must reach the Coast Guard on or before July 11, 2016.

You may submit comments identified by docket number USCG-2016-0205 using the Federal eRulemaking Portal at <http://www.regulations.gov>.

Ref: LNM 20 through 24-16/Docket Number USCG-2016-0205 Chart: 11485

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – TOLOMATO RIVER TO PALM SHORES – INDIAN RIVER – COCOA BEACH – JOHN F KENNEDY/NASA PARKWAY BRIDGE: Bridge Repairs.

Construction Management of Florida will be repairing the John F Kennedy/NASA Parkway Bridge across the Atlantic Intracoastal Waterway, Cape Canaveral, Florida. All equipment will be stationed outside the navigable channel. Mariners are requested to maintain minimum wake through this construction area. This work is anticipated to be completed by July 2016.

Update:

The contractor will be working on both the East bound and West bound spans of this bridge and at times two of the four leaves will be in the open position. Mariners will need to request an opening to pass through the down structure. From June 20 through June 26, 2016 between the hours of 6:30 a.m. and 12 noon, this bridge will be closed to navigation, no exceptions. Mariners that can pass through the bridge in the closed position may do so at any time. Mariners are advised to contact the bridge tender for updates.

Ref: LNM 11 through 24-16 Chart: 11485

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – TOLOMATO RIVER TO PALM SHORES – INDIAN RIVER – BANANA RIVER - COCOA BEACH – JOHN F KENNEDY/NASA PARKWAY BRIDGE: Bridge Repairs.

Construction Management of Florida will be repairing the John F Kennedy/NASA Parkway Bridge across the Banana River, Cape Canaveral, Florida. A small boat and float will be in the waterway at times; but will not restrict the navigable channel. Mariners are requested to maintain minimum wake through this construction area. This work is anticipated to be completed by July 2016.

Ref: LNM 11 through 24-16 Chart: 11485

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – TOLOMATO RIVER TO PALM SHORES – INDIAN RIVER – COCOA BEACH – SR 520 BRIDGE: Bridge Repairs.

Southern Road and Bridge has been contracted by FDOT to repair the SR 520 Bridge across the Atlantic Intracoastal Waterway, Cocoa, Brevard County, Florida. This work will start on March 9, and will continue through January 3, 2017. The contractor is anticipating on having floating equipment in and around the channel consisting of barges, towing boats and transport boats. Vessels requiring a full channel clearance should contact the towing vessel on VHF-FM channel 13 for passing information. The vertical clearance will be reduced by 4 feet on one-half the channel. The full 65 feet of vertical clearance will be available at all times by one-half the channel (45 feet of horizontal clearance). Mariners are requested to maintain minimum wake through this area.

Ref: LNM 10 through 24-16 Chart: 11485

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – FORT PIERCE TO WEST PALM – JUPITER FEDERAL (US 1) BRIDGE: Bridge Repairs.

Southern Road & Bridge has advised the Coast Guard that they will be repairing the Jupiter Federal (US 1) Bridge across the Atlantic Intracoastal Waterway, Jupiter, Florida. The contractor will be using small barges under the bridge as well as adjacent areas to the north and south of the bridge. This will start on June 11, 2016 and will continue for 67 days. The contractor has advised that they will not be blocking/restricting the main channel. Vessels are requested to maintain minimum speed through this area.

Ref: LNM 22 through 24-16 Chart: 11472

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – PALM SHORES TO WEST PALM BEACH – FLAGLER MEMORIAL/ROYAL PARK/SOUTHERN BOULEVARD BRIDGES: Bridge Construction/Waterway Restriction/Temporary Bridge Regulation Changes/Update.

The Florida Department of Transportation has requested that the Flagler Memorial Bridge be placed on a restricted opening schedule until the new Flagler Memorial Bridge construction can be completed.

Mariners are reminded that the horizontal clearance at the Flagler Memorial Bridge is currently set at 70 feet and will remain until the new bridge is built and this bridge is removed.

**Flagler Memorial Bridge Construction Update:**

The main bascule spans of the new bridge are ready to be built along with concrete pours. This work will require the new spans to be left in the down position along with channel blockage due to floating equipment mandated to be in the waterway. The following schedule has

been approved by the Coast Guard with the understanding that this method will take the least amount of time. This work will start on May 9 and will run through August 1, 2016

Half-channel closures with the old Flagler Bridge also being on a single-leaf operation from May 31 through June 6, 2016.

Complete channel closure on June 7 to June 15, 2016.

Half-channel closures with the old Flagler Bridge also being on a single-leaf operation from June 16 through July 1, 2016.

The bridge will be on its temporary operating schedule during July 4th weekend, July 2 through July 5, 2016

Complete channel closure on July 6 to July 14, 2016.

Half-channel closures with the old Flagler Bridge also being on a single-leaf operation from July 15 through August 1, 2016.

For once a week double-leaf bridge openings will be available during specific days, please contact PCL at 561-253-6995 between the hours of 8am and 4pm Monday through Thursday, and Friday 8am and 2pm. Please call 48 hours before the potential opening.

#### UPDATE:

The existing Flagler Memorial Bridge will remain on the following opening schedule - once an hour on the quarter-hour, with no openings at 8:15 a.m. or 4:15 p.m., Monday through Friday, except Federal holiday to allow for rush hour traffic.

Per 33 CFR §117.31 Drawbridge operations for emergency vehicles and emergency vessels.

(a) Upon receiving notification that an emergency vehicle is responding to an emergency situation, a drawtender must make all reasonable efforts to have the drawspan closed at the time the emergency vehicle arrives.

(b) When a drawtender receives notice, or a proper signal as provided in §117.15 of this part, the drawtender shall take all reasonable measures to have the draw opened, regardless of the operating schedule of the draw, for passage of the following, provided this opening does not conflict with local emergency management procedures which have been approved by the cognizant Coast Guard Captain of the Port:

- (1) Federal, State, and local government vessels used for public safety;
- (2) Vessels in distress where a delay would endanger life or property;
- (3) Commercial vessels engaged in rescue or emergency salvage operations; and
- (4) Vessels seeking shelter from severe weather.

Ref: LNM 45-12 through 24-16

Chart: 11472

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – FLAGLER MEMORIAL/ROYAL PARK/SOUTHERN BOULEVARD: [Bridge Closures](#).

The Flagler Memorial, Royal Park and Southern Boulevard Bridges across the Atlantic Intracoastal Waterway, Palm Beach Beach, Palm Beach County, Florida will be closed to navigation from 9:00 p.m. to 11:00 p.m. on July 4, 2016 to facilitate pedestrian and vehicle traffic movements during a 4<sup>th</sup> of July event. Vessels that may pass through the bridge without an opening may do so at any time.

Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – LAKE WORTH (ROBERT HARRIS/SR 802) BRIDGE: [Bridge Closure](#).

The Lake Worth (Robert Harris/SR 802) Bridge across the Atlantic Intracoastal Waterway, Lake Worth, Palm Beach County, Florida will be closed to navigation from 8:50 p.m. to 9:50 p.m. on July 4, 2016 to facilitate pedestrian and vehicle traffic movements during a 4<sup>th</sup> of July event. Vessels that may pass through the bridge without an opening may do so at any time.

Ref: LNM 22 through 24-16

Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – NORTHEAST 5 STREET (GEORGE BUSH)/EAST ATLANTIC AVENUE/LINTON BOULEVARD BRIDGES: [Bridge Closures](#).

The NE 8<sup>th</sup> Street (George Bush), East Atlantic Avenue and Linton Boulevard Bridges across the Atlantic Intracoastal Waterway, Delray Beach, Palm Beach County, Florida will be closed to navigation from 8:00 p.m. to 11:30 p.m. on July 4, 2016 to facilitate pedestrian and vehicle traffic movements during a 4<sup>th</sup> of July event. Vessels that may pass through the bridge without an opening may do so at any time.

Ref: LNM 24-16

Chart: 11467

FLORIDA - ATLANTIC INTRACOASTAL WATERWAY - WEST PALM BEACH TO MIAMI –HILLSBORO BOULEVARD BRIDGE: [Bridge Repairs](#).

Seacoast, Incorporated has been contracted by Florida Department of Transportation to repair the Hillsboro Boulevard Bridge across the Atlantic Intracoastal Waterway, Deerfield Beach, Broward County, Florida. The Coast Guard has approved single-leaf operations with a double-leaf available with a four hour notice to the bridge tender from April 1 through June 30, 2016 between the hours of 7:00 a.m. and

5:00 p.m. This single-leaf operation will be continue to be on the twice an hour schedule. There will be a work barge under the down span during working hours and will need to be removed for double-leaf openings. Vessels not requiring an opening or the work barge removed may pass at any time.

Ref: LNM 14 through 24-16

Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – HILLSBORO BOULEVARD BRIDGE: Bridge Closure.

The Hillsboro Boulevard Bridge across the Atlantic Intracoastal Waterway, Deerfield Beach, Broward County, Florida will be closed to navigation from 7:00 p.m. to 11:00 p.m. on July 4, 2016 to facilitate pedestrian and vehicle traffic movements during a 4<sup>th</sup> of July event. Vessels that may pass through the bridge without an opening may do so at any time.

Ref: LNM 21 through 24-16

Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – POMPANO – NE 14 STREET/ATLANTIC BOULEVARD BRIDGES: Bridge Closure.

The NE 14<sup>th</sup> Street and Atlantic Boulevard Bridges across the Atlantic Intracoastal Waterway, Pompano Beach, Florida will be closed to navigation from 9:00 p.m. to 11:00 p.m. on July 4, 2016 to facilitate pedestrian and vehicle traffic movements during a 4<sup>th</sup> of July event. Vessels that may pass through the bridge without an opening may do so at any time.

Ref: LNM 14 through 24-16

Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – COMMERCIAL BOULEVARD BRIDGE: Bridge Closure.

The Commercial Boulevard Bridge across the Atlantic Intracoastal Waterway, Ft Lauderdale, Broward County, Florida will be closed to navigation from 9:00 p.m. to 11:00 p.m. on July 4, 2016 to facilitate pedestrian and vehicle traffic movements during a 4<sup>th</sup> of July event. Vessels that may pass through the bridge without an opening may do so at any time.

Ref: LNM 21 through 24-16

Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – MIDDLE RIVER – EAST SUNRISE BOULEVARD BRIDGE: Bridge Construction.

Dragados USA, Inc has been contracted by the Florida Department of Transportation to replace the East Sunrise Boulevard Bridge across, Middle River, Fort Lauderdale, Florida. This work is expected to be completed in July 2016.

Ref: LNM 08-14 through 24-16

Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – NEW RIVER – FEC RAILROAD BRIDGE: Test Deviation.

The following information has been extracted from the Test Deviation, please view [www.regulations.gov](http://www.regulations.gov) USCG-2015-0271 for the complete text.

The Coast Guard is issuing a temporary deviation from the operating schedule that governs the Florida East Coast Railway (FEC) Railroad Bridge across the New River, mile 2.5, at Fort Lauderdale, FL. This test deviation is from April 19 through 6:00 a.m. on October 16, 2015.

During the test deviation period, the draw of the FEC Railroad bridge across the New River, mile 2.5, at Fort Lauderdale, FL, will operate as follows:

The bridge is constantly tended.

The bridge tender will utilize a VHF-FM radio to communicate on channels 9 and 16 and may be contacted by telephone at 305-889-5572. Signage will be posted displaying VHF radio contact information and the bridge tender and dispatch telephone number. A countdown clock for bridge closure shall be posted at the bridge site and visible for maritime traffic.

A bridge log will be maintained including, at a minimum, bridge opening and closing times.

(e) When the draw is in the fully open position, green lights will be displayed to indicate that vessels may pass.

(f) When a train approaches, the lights go to flashing red and a horn starts four blasts, pauses, and then continues four blasts then the draw lowers and locks.

(g) After the train has cleared the bridge, the draw opens and the lights return to green.

(h) The bridge shall not be closed more than 60 minutes combined for any 120 minute time period beginning at 12:01 a.m.

You may submit comments identified by docket number USCG-2015-0271 using any one of the following methods:

Federal eRulemaking Portal: <http://www.regulations.gov>.

Fax: 202-493-2251.

Mail or Delivery: Docket Management Facility (M-30), U.S. Department of Transportation, West Building Ground Floor, Room W12-140, 1200 New Jersey Avenue SE, Washington, DC 20590-0001.

To read the entire test deviation please go to [www.regulations.gov](http://www.regulations.gov).

The Notice of Proposed Rulemaking (NPRM) for Docket Number USCG-2015-0271 was posted on Tuesday, November 3, 2015. The request for comments on this NPRM extends through December 3, 2015. All comments will be reviewed prior to the issuance of a Final Rule for this bridge.

Ref: LNM 20-15 through 24-16 and Docket Number USCG-2015-0271  
Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – NEW RIVER (SOUTH FORK) – CSX RAILROAD BRIDGE: New Bridge Construction/Temporary Regulation Change/Horizontal Clearance Reduction.

The contractor working on the CSX (SFRTA) Railroad Bridge replacement across the South Fork of the New River mile 2.8, Fort Lauderdale, Broward County, Florida has requested to temporarily change the regulation governing the existing CSX Railroad Bridge. This temporary regulation change has been approved and has placed this bridge to an on demand schedule whereas the bridge will be placed in the closed to navigation position during certain portions of the construction operations with an open on demand schedule. Mariners are requested to contact the bridge tender on VHF-FM channel 9 for opening and passing information.

UPDATE as of May 24, 2016

The SFRTA/CSX Railroad Bridge across the New River will be allowed to be closed from 9:30 p.m. to 6:00 a.m. starting on June 8, 2016. They will be closing the waterway each night, Monday through Friday between 9:30 p.m. to 6:00 a.m. until June 29, 2016.. Please plan accordingly.

The estimated completion date for this project is June 2016.

Ref: LNM 16-08 through 24-16  
Chart: 11467

CG File: 2500

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – RAVENSWOOD ROAD BRIDGE: Bridge Construction.

The Florida Department of Transportation is replacing the Ravenswood Road Bridge across the Dania Cut-off Canal, Dania Beach, Florida. This project will start in early January 2016 and is anticipated to be completed by May 31, 2017. There will be floating equipment in the vicinity of the bridge during most of this work. The contractor is anticipating several waterway closures during the times that the new steel is being placed across the waterway. For additional information, please contact Casey Lienes, Public Information Officer at (954) 940-7585 or email: cliening@corrado.com.

Ref: LNM 38-15 through 24-16  
Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – DANIA BEACH/SHERIDAN STREET/HOLLYWOOD BOULEVARD BRIDGES: Bridge Closure.

The Dania Beach, Sheridan Street and Hollywood Boulevard Bridges across the Atlantic Intracoastal Waterway, Broward County, Florida will be closed to navigation from 8:00 p.m. to 11:30 p.m. on July 4, 2016 to facilitate pedestrian and vehicle traffic movements during a 4<sup>th</sup> of July event. Vessels that may pass through the bridge without an opening may do so at any time.

Ref: LNM 21 through 24-16  
Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – MIAMI – SUNNY ISLES – TOWN CENTER PARK CANAL BRIDGE: Bridge Construction.

Ebsary Foundation has advised the Coast Guard that they will be starting construction of the Town Center Park Canal Bridge across Town Center Park Canal, Sunny Isles, Miami-Dade County, Florida on May 1, 2016 and will continue until December 31, 2016. This work will consist of floating equipment blocking this waterway in the vicinity of the Canal throughout construction. Mariners are requested to maintain minimum wake through this area. This bridge will provide a vertical clearance of 6 feet and a horizontal clearance of 35 feet once completed. The work is planned from Monday through Saturday, 7:00 a.m. to 7:00 p.m.

Ref: LNM 11 through 24-16  
Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – WEST PALM BEACH TO MIAMI – MIAMI – BROAD CAUSEWAY BRIDGE: Bridge Discrepancy.

M&J Construction has advised the Coast Guard that starting January 12, 2015, they will begin repairing the Broad Causeway Bridge across the Atlantic Intracoastal Waterway, Bal Harbor, Miami-Dade County, Florida. In order to complete these repairs, the Coast Guard has agreed to allow this bridge to operate on single-leaf operations with a four hour notice for a double-leaf opening to the bridge tender at 305-891-2221. This bridge provides a horizontal clearance of 33 feet with one leaf in the closed position. The vertical clearance of the down span will be reduced by 3 feet due to the containment system. Mariners are advised that during this 480 day operation, M&J Construction will be requesting permission to block the navigation channel at night to install the fender system under the bridge. This nighttime work will minimize disruptions to marine traffic.

Ref: LNM 13-14 through 24-16  
Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – MIAMI TO FLORIDA KEYS – EAST AND WEST 79<sup>TH</sup> STREET CAUSEWAY BRIDGES: Notice of Proposed Rulemaking.

The Coast Guard proposes modifying the operating schedule that governs the West 79<sup>th</sup> Street Bridge across the Atlantic Intracoastal Waterway mile 1084.6, Miami, FL and the operating schedule that governs the East 79<sup>th</sup> Street Bridge across Miami Beach Channel, Miami, FL. This action will place the East and West 79<sup>th</sup> Street Bridges across Miami Beach Channel and Atlantic Intracoastal Waterway, Miami, FL on a twice an hour opening schedule between 7 a.m. and 7 p.m., Monday through Friday, except Federal holidays. This action is intended to reduce vehicular traffic caused by these bridges opening on demand.

Comments and related material must reach the Coast Guard on or before July 11, 2016.

You may submit comments identified by docket number USCG-2015-0768 using the Federal eRulemaking Portal at <http://www.regulations.gov>.

Ref: LNM 20 through 24-16/Docket Number USCG-2015-0768 Chart: 11467

FLORIDA - ATLANTIC INTRACOASTAL WATERWAY - WEST PALM BEACH TO MIAMI - INDIAN CREEK - 63RD STREET BRIDGE: Final Rule.

The Coast Guard is changing the operating schedule that governs the 63<sup>rd</sup> Street Bridge across Indian Creek mile 40.0, at Miami Beach, FL. This rule is effective July 8, 2016.

Section 117.293 – Indian Creek – The draw of the 63<sup>rd</sup> Street Bridge, Indian Creek, mile 4.0, at Miami Beach, shall open on signal except as follows:

- (a) From 7 a.m. to 7 p.m., Monday through Friday except Federal holidays, the draw need open only on the hour and half-hour.
- (b) From 7:10 a.m. to 9:55 a.m. and 4:05 p.m. to 6:59 p.m., Monday through Friday except Federal holidays, the draw need not open for the passage of vessels.
- (c) In February of each year during the period seven days prior to the City of Miami Beach Yacht and Brokerage Show and the four days following the show, from 10 a.m. to 4 p.m., the bridge need not open except for 10 minutes at the top of the hour. At all other times the bridge shall operate on its normal schedule.

Ref: LNM 24-16/Docket Number [USCG-2015-0940] Chart: 11467

FLORIDA – ATLANTIC INTRACOASTAL WATERWAY – MIAMI TO FLORIDA KEYS – CARD SOUND ROAD BRIDGE: Bridge Repairs.

Coastal Gunite Construction Company is currently repairing the Card Sound Road Bridge across the Atlantic Intracoastal Waterway, Key Largo, Florida. This work will reduce the horizontal clearance by no more than 20 feet at any time. The vertical clearance will be reduced by 4 feet for one-half the channel due to scaffolding. Mariners are requested to maintain minimum wake through this area. This project is anticipated to be completed by April 30, 2017.

Ref: LNM 11 through 24-16 Chart: 11463

FLORIDA - OKEECHOBEE WATERWAY – ST LUCIE INLET TO FORT MYERS – CALOOSAHATCHEE RIVER – OLD CSX RAILROAD SUBSTRUCTURE: Pile Deterioration.

The Substructure of an old Railroad line next to the existing Seminole Gulf Railroad line across the Caloosahatchee River, Lee County, Fort Myers, Florida, is deteriorating and parts have been reported floating in the waterway. Mariners are advised to remain vigilant when transiting this area.

Ref: LNM 01-13 through 24-16 Chart: 11428

FLORIDA - OKEECHOBEE WATERWAY – ST LUCIE INLET TO FORT MYERS – CALOOSAHATCHEE RIVER – US 45 BRIDGE: Bridge Repairs.

Inland Construction and Engineering, Inc. has advised the Coast Guard that they will be working on the SR 45 (US 41) Bridge across the Caloosahatchee River, Fort Myers, Lee County, Florida from May 24 through October 22, 2016. Work conducted will involve concrete repairs to the bridge pilings. Repairs will be performed on floating platforms including barges. The work conducted is not expected to impact vessel traffic through the main channel. Mariners are requested to proceed with caution.

Ref: LNM 21 through 24-16 Chart: 11428

FLORIDA – GULF INTRACOASTAL WATERWAY – CHARLOTTE HARBOR – TAMPA BAY – GASPARILLA SWINGBRIDGE: Bridge Construction/Channel Closure/UPDATE.

GLF USA Corporation has advised the Coast Guard that the new Gasparilla Island Swingbridge across the Gulf Intracoastal Waterway, Gasparilla, Florida is open to vehicle traffic. The old swingbridge is currently in the open to navigation position and the north channel provides a horizontal clearance of 58 feet and the south channel provides a horizontal clearance of 47 feet. The vertical clearance of the new swingbridge is 22 feet at mean high water.

The contractor is working on a schedule to remove the old swingbridge in the near future. This schedule with waterway restrictions will be published in the Local Notice to Mariners as soon as it is available. Mariners should proceed with caution.

The tug/barge will monitor VHF channel 9. The Construction Manager, Bob Fitzgerald's phone number is (786) 999-3411. The Project Manager, Rick Alexander's phone number is (941) 648-0919. The Project Engineer, John Kipp's phone number is (954) 317-6169.

Ref: LNM 04-14 through 24-16

Chart: 11425

FLORIDA - GULF INTRACOASTAL WATERWAY - CHARLOTTE HARBOR - TAMPA BAY – STICKNEY POINT AND NORTH SIESTA KEY BRIDGES: Bridge Closure.

The Stickney Point (SR 72), mile 68.6 and North Siesta Key (SR 758), mile 71.6 Bridges across the Gulf Intracoastal Waterway, Sieast Key, Florida will be allowed to not open to navigation from 9:00 p.m. to 11:59 p.m. on July 4, 2016 to facilitate the Annual Siesta Key July 4<sup>th</sup> Celebration event. Vessels that may pass through the bridge without an opening may do so at any time.

Ref: LNM 19 through 24-16

Chart: 11411

FLORIDA – GULF INTRACOASTAL WATERWAY – TAMPA BAY TO NEW PORT RICHEY – BOCA CIEGA BAY – PINELLAS BAYWAY STRUCTURE 'E': Special Bridge Notice.

The Coast Guard has issued a public notice announcing a permit application from the Florida Department of Transportation (FDOT) for the approval of location and plans for the construction of a bridge over the Gulf Intracoastal Waterway (GICW), mile 113.0 (Boca Ciega Bay) Lat 27.693775, Long -82.717781. The FDOT proposes to replace the existing double leaf bascule bridge on Pinellas Bayway S (SR679) with a high level fixed bridge. The bridge is known as Bayway E or the Tierra Verde Bridge and connects Isla Del Sol and Tierra Verde, FL. Public Notice 04-16 provides details of the proposed new bridge and solicits comments concerning the project. The public notice is available at <http://www.navcen.uscg.gov/?pageName=pnBridges&Active=1&region=7>.

Ref: LNM 21 through 24-16

Chart: 11411

FLORIDA – GULF INTRACOASTAL WATERWAY – TAMPA BAY – ANCLOTE RIVER – WELCH CAUSEWAY/TOM STUART BRIDGE: Bridge Repairs

Quinn Construction is currently repairing the Welch Causeway/Tom Stuart Bridge across the Gulf Intracoastal Waterway mile 122.8, Madera Beach, Pinellas County, Florida. The Coast Guard has agreed to allow this bridge to operate on single-leaf operations with a four hour notice for a double-leaf opening from May 16, 2016 through August 15, 2016, the bridge tender can be contacted via VHF-FM or call 727-644-0210. This bridge provides a horizontal clearance of 45 feet with one leaf in the closed position. This work will have floating equipment under the down span. Mariners are requested to proceed with caution.

Ref: LNM 20 through 24-16

Chart: 11411

FLORIDA - GULF INTRACOASTAL WATERWAY - TAMPA BAY – ANCLOTE RIVER – DUNEDIN BRIDGE: Bridge Closure.

The Dunedin Causeway Bridge across the Gulf Intracoastal Waterway, Dunedin, Florida will be allowed to not open to navigation from 11:00 p.m. on July 3 to 2:00 a.m. on July 4, 2016 to facilitate the Annual Kiwanis-Virgina Street Dermatology Midnight Run event. Vessels that may pass through the bridge without an opening may do so at any time.

Ref: LNM 20 through 24-16

Chart: 11411

## **AUXILIARY SAFE BOATING PROGRAM**

Become a better, safe boater. Find a course near you - see more at: [www.cgaux.org](http://www.cgaux.org) or call Boat U.S. at 1-800-336-2628.

Boating Safety, Life Jackets, Top Priority of National Safe Boating Week held from May 21-27, 2016 – see more at: <http://www.safeboatingcampaign.com/boating-safety-life-jackets-top-priority-of-national-safe-boating-week/>

U.S. Coast Guard's Boating Safety Division – see more at: <http://uscgboating.org/>

Before You Head Out Download The Boating Safety Mobile App - see more at: <http://live.cgaux.org/?p=5083#sthash.XDTJ6oxs.dpuf>

HOST	DATES	TIME	LOCATION
U.S. Coast Guard Auxiliary Flotilla 10-10 St Simons Island, GA (704)254-1643 <a href="mailto:fsope@cgauxssi.us">fsope@cgauxssi.us</a>	About Boating Safely (ABS)  Saturdays 27 February 30 April 16 July 15 October 12 November Sign up at: <a href="http://www.cgauxssi.us">www.cgauxssi.us</a>	9:00am - 5:00pm	UGA Marine Extension 715 Bay St Brunswick, GA
U.S. Coast Guard Auxiliary Flotilla 10-10 St Simons Island, GA (704)254-1643 <a href="mailto:fsope@cgauxssi.us">fsope@cgauxssi.us</a>	Boating Skills and Seamanship (BS&S)  Saturday, 12 March 3 week nights through Saturday, 19 March Sign up at: <a href="http://www.cgauxssi.us">www.cgauxssi.us</a>	Saturday 9:00am – 5:00pm  Week days 6:00pm – 9:00pm	UGA Marine Extension 715 Bay St Brunswick, GA
U.S. Coast Guard Auxiliary Flotilla 10-10 St Simons Island, GA (704)254-1643 <a href="mailto:fsope@cgauxssi.us">fsope@cgauxssi.us</a>	GPS for Mariners  Saturday, 16 April Sign up at: <a href="http://www.cgauxssi.us">www.cgauxssi.us</a>	9:00am - 5:00pm	UGA Marine Extension 715 Bay St Brunswick, GA
U.S. Coast Guard Auxiliary Flotilla 10-10 St Simons Island, GA (704)254-1643 <a href="mailto:fsope@cgauxssi.us">fsope@cgauxssi.us</a>	Boating Skills and Seamanship (BS&S)  Saturday, 18 June 3 week nights through Saturday, 25 June Sign up at: <a href="http://www.cgauxssi.us">www.cgauxssi.us</a>	Saturday 9:00am – 5:00pm  Week days 6:00pm – 9:00pm	UGA Marine Extension 715 Bay St Brunswick, GA
U.S. Coast Guard Auxiliary	Boating Skills and	Saturday	UGA Marine

Flotilla 10-10 St Simons Island, GA (704)254-1643 <a href="mailto:fsope@cgauxssi.us">fsope@cgauxssi.us</a>	Seamanship (BS&S)  Saturday, 10 September 3 week nights through Saturday, 17 September Sign up at: <a href="http://www.cgauxssi.us">www.cgauxssi.us</a>	9:00am – 5:00pm  Week days 6:00pm – 9:00pm	Extension 715 Bay St Brunswick, GA
U.S. Coast Guard Auxiliary Flotilla 17-6 Cocoa, FL (877) 835-3760 <a href="mailto:Flotilla1706@ureach.com">Flotilla1706@ureach.com</a>	Continuous ABS 3 <sup>rd</sup> Saturday of the month **No classes in December**	8:00am - 5:00pm	USCG Auxiliary Bldg Lee Wenner Park 300 Riveredge Blvd Cocoa Village, FL
U.S. Coast Guard Auxiliary Flotilla 3-2 Fort Lauderdale, FL (954) 463-0034	Continuous ABS 1 <sup>st</sup> Saturday of each month	7:30am - 4:00pm	McVey House 601 Seabreeze Blvd Fort Lauderdale, FL
U.S. Power Squadron Fort Lauderdale (954) 523-3577	Continuous BSB 1 <sup>st</sup> Monday each month	7:00pm - 9:00pm	Lauderdale Marine Ctr 2029 SW 20 <sup>th</sup> Street Fort Lauderdale, FL
U.S. Coast Guard Auxiliary Flotilla 3-8 (954) 296-2303 (954) 423-9245	Continuous ABS every Saturday	8:30am - 5:00pm	Bass Pro Shop 200 Gulf Stream Way Dania Beach, FL
U.S. Coast Guard Auxiliary Flotilla 7-16 (727) 399-7986	Continuous BSS 1 <sup>st</sup> and 3 <sup>rd</sup> Wednesday each month	7:30pm	USCG Auxiliary Building 3120 Miriam Street South Gulfport, FL
U.S. Coast Guard Aux Flotilla 11-3 Pete Lore (727) 391-5185	Continuous ABS 1 <sup>st</sup> Saturday of each month	8:00am - 5:00pm	Training Bldg 299 Boca Ciega Drive Madeira, FL
U.S. Coast Guard Auxiliary Flotilla 7-9 Brian Garry (813) 884-2010	Continuous BSS 12 weeks every Wednesday	7:00pm - 9:00pm	Flotilla 7-9 HQ 5108 W Gandy Blvd Gandy Boat Ramp Tampa, FL
U.S. Coast Guard Auxiliary Flotilla 11-1 (727) 469-8895	Continuous ABS 2 <sup>nd</sup> weekend Saturday & Sunday Monthly	8:00am - 1:00pm	Cheek-Powell Heart & Vascular Pavilion 455 Pinellas Street Clearwater, FL
U.S. Coast Guard Auxiliary Flotilla 11-9 (727) 938-8568	Continuous ABS 2 <sup>nd</sup> Saturday of each month	9:00am - 4:00pm	Flotilla 11-9 HQ 847 Roosevelt Blvd Tarpon Springs, FL
U.S. Coast Guard Auxiliary	Continuous ABS	9:00am - 4:30pm	USCG Auxiliary

Flotilla 11-6 (727) 375-1196	1 <sup>st</sup> Saturday of each month		Communications Bldg 3920 Marine Parkway New Port Richey, FL
U.S. Coast Guard Auxiliary Flotilla 11-7 (727) 697-8013 <a href="mailto:HUDSONFLOTILLA11.7@GMAIL.COM">HUDSONFLOTILLA11.7@GMAIL.COM</a>	Continuous ABS 4 <sup>th</sup> Saturday of each month	9:00am - 4:00pm	Flotilla 11-7 HQ (besides the Elks Club) 9135 Denton Avenue Hudson, FL 34667

## **D7 SUMMARY OF MARINE EVENTS**

### **DISTRICT SEVEN AOR: FLORIDA-GEORGIA-SOUTH CAROLINA: Operation Stand-Up America/Paddleboard Event**

“Operation Stand Up America” is a 5-month long paddleboard event. The event begins in Corpus Christi, TX moving along the coast of the Gulf States, down south to Key West, traveling up towards Cape Canaveral, and finishing up in NYC Harbor, NY at the Statue of Liberty.

Event date: March 1, 2016 – August 1, 2016 (weather dependant)  
Time: 5:00am to 7:00pm, reoccurring daily and daylight hours only

There will be (2) 14ft Stand up Paddleboards, (1) 24ft Safety boat and (1) 110ft Safety Sea Doo. The boats will monitor VHF channel 16. Various paddleboats will join in from rally points to participate for segments of the route. Ref: LNM 09/16

### **SOUTH CAROLINA-MURRELLS INLET, NORTH MYRTLE BEACH, MOUNT PLEASANT, NORTH CHARLESTON: July 4<sup>th</sup> Event and Locations COTP Zone Charleston Safety Zones**

Murrells Inlet, South Carolina. All waters within a 500 yard radius around Veterans Pier, where the fireworks will be launched, located in Murrells Inlet, SC at approximate position 33°33'23"N, 79°01'48"W. This safety zone will be enforced from 9:15 p.m. until 10:00 p.m. on July 4, 2016.

North Myrtle Beach, South Carolina. All waters within a 500 yard radius around Cherry Grove Pier, where the fireworks will be launched, located on the Atlantic Ocean at approximate position 33°49'38"N, 78°37'54"W. This safety zone will be enforced from 9:15 p.m. until 10 p.m. on July 4, 2016.

Mount Pleasant, South Carolina. All waters within a 500 yard radius around the barge from which the fireworks will be launched, located on the Cooper River at approximate position 32°47'01"N, 79°53'8"W. This safety zone will be enforced from 8:45 p.m. until 9:45 p.m. on July 4, 2016.

North Charleston, SC. All waters within a 500 yard radius around the barges from which the fireworks will be launched, located on the Cooper River, at River Front Park in approximate position 32°51'57"N, 79°57'35"W. This safety zone will be enforced from 8:45 p.m. until 10:15 p.m. on July 4, 2016.

No one shall enter transit through, anchor in or remain within the regulated area unless specifically authorized by the Captain of the Port or his designated representative. All persons requesting to transit through the regulated area must contact the Coast Guard via VHF-FM channel 16 or by telephone at: (843) 740-7050. For any concerns, please contact Sector Charleston Waterways Management Office at: (843) 740-3180. Ref: LNM 25/16

**SOUTH CAROLINA-BUCKSPORT: Summer Extravaganza Drag Boat Races**

The Coast Guard Captain of the Port Charleston has established a Special Local Regulation for the Summer Extravaganza drag boat races in Bucksport, SC (Mile Marker 377 on the Atlantic Intracoastal Waterway) from noon until 7:00 p.m. on July 9 and 10, 2016. The Special Local Regulation will be enforced to protect participants and spectators from the hazards associated with this event. Provisions will be made for marine traffic to transit between races. The regulated area will be bounded by the following coordinates:

33° 39' 11.46"N 079° 05' 36.78W  
33° 39' 12.18"N 079° 05' 47.76W  
33° 38' 39.48"N 079° 05' 37.44W  
33° 38' 42.30"N 079° 05' 30.60W

No one shall enter, transit through, anchor in, or remain within the regulated area unless specifically authorized by the Captain of the Port or their designated representative. All persons requesting to transit through the regulated area must contact the Coast Guard via VHF-FM channel 16 or by telephone at: (843) 740-7050. Ref: LNM 25/16

**SOUTH CAROLINA-BEAUFORT: Beaufort Water Festival Air Show**

The Coast Guard is establishing a special local regulation for the Beaufort Water Festival Air Show in Beaufort, SC on July 23, 2016 from noon to 5:00 p.m. The special local regulation will encompass a portion of the waterway that is 700 ft wide by 2600 ft in length, whose approximate corner coordinates are as follows:

32° 25' 47" N / 080° 40' 44" W 32° 25' 41" N / 080° 40' 14" W  
32° 25' 40" N / 080° 40' 46" W 32° 25' 35" N / 080° 40' 16" W

No one shall enter, transit through, anchor in, or remain within the regulated area unless specifically authorized by the Captain of the Port or their designated representative.

All persons requesting to transit through the regulated areas must contact the Coast Guard via VHF-FM channel 16 or by telephone at: (843) 740-7050. For any concerns, please contact Sector Charleston Waterways Management Office at: (843) 740-3180. Ref: LNM 25/16

## **FLORIDA-JACKSONVILLE: July 4<sup>th</sup> Event and Locations**

The Captain of the Port Jacksonville Florida advises mariners that a 500-yard safety zone will be in effect around multiple fireworks events being held on July 4th, 2016. The safety zones will be in effect around the fireworks staging locations during the storage, preparation, and launching of fireworks. All persons and vessels are prohibited from entering, transiting through, anchoring in, or remaining within the safety zones unless authorized by the Captain of the Port or designated representatives. Ref: LNM 25/16

The locations and times of the fireworks displays are as follows:

- St. Marys River, Kiwanis club of St. Marys, GA (9:30 p.m.-10:30 p.m.)
- St. Johns River, Orange Park, FL (9:00 p.m.-9:30 p.m.)
- Jacksonville Beach Pier, Jacksonville, FL (9:00 p.m.-9:25 p.m.)
- Palatka City Pier, Palatka, FL (9:00 p.m.-9:25 p.m.)
- Matanzas River, North side of the Bridge of Lions, St. Augustine, FL (9:00 p.m.-9:20 p.m.)
- Flagler Beach Pier, Flagler Beach, FL (9:00 p.m.-9:30 p.m.)
- Halifax River, North Side of the Granada Bridge, Ormond Beach, FL (9:00 p.m.-9:30 p.m.)
- Southwest Corner of Chicken Island, New Smyrna Beach, FL (9:15 p.m.-9:40 p.m.)
- Lake Tavares, Wootton Park, Tavares, FL (9:00 p.m.-9:30 p.m.)
- Southwest Side of Merritt Island Causeway, Cocoa, FL (9:15 p.m.-9:35 p.m.)
- Lake Tohopekaliga, Lakefront Park, Kissimmee, FL (9:00 p.m.-9:30 p.m.)



## BREVARD COUNTY – TURKEY CREEK MUCK REMOVAL PROEJCT

### **TEMPORARY DREDGE PIPELINE PLAN**

Updated 1-23-2016

#### INTRODUCTION

Gator Dredging plans to temporarily deploy and utilize an estimated 9,000 LF of 14 inch inside diameter (16" O.D.) HDPE pipe from the dredge template to the NW corner of the DMMA as shown on attached Figure A. The length pipeline requires the assistance of one (1) booster pump which will be staged at Castaway Point Park at 2990 Bay Blvd. NE, Palm Bay, FL 32905.

The route identified provided by Brevard County as shown on attached **Figure A** follows approved route which has necessary easements and has met requirements of regulatory agencies.

Before any work is performed, pre-work videos of the upland and shorelines along and adjacent to the pipeline route will be collected to record existing conditions. Pre-work videos will be taken of the entire Castaway Point Park parcel.

Gator Dredging proposes to submerge all pipeline except for (500 LF) directly behind the dredge to allow for dredge maneuverability and the area(s) (~200 LF) as it transitions from submerged to upland.

#### PIPELINE PREPARATION & STORAGE

Dredge pipe will be delivered in 50 foot lengths and offloaded at the staging site located on Popsoil Avenue and one (1) load will be delivered to the DMMA site located at 3600 Dixie Highway NE. A 618 McElroy pipe fusing machine will fuse the pipe at both locations into 400 to 500 foot sections and install flanges on each end. The pipe ends will be temporarily capped and will be floated into position prior to dredge launch and positioning. Specialized pipe weights will be strategically placed along each section of pipe prior to launch of pipe. A 500 foot section of pipe will be outfitted with floats every 25 feet. This floating pipe is the immediate dredge discharge pipe and requires to be floated for dredge maneuverability. The floats will be lighted for navigation safety. The pipeline will be lighted and demarcated in accordance with 33 CFR 88.15. While floating in the storage location, the pipeline will be marked with amber yellow lights and have red lights at each end of the stored pipe. The lights will be as described in 33 CFR 88, Annex V.



Initially 9,000 LF of pipe will be installed and dredging will commence. As the dredge progresses further from DMMA additional 500 LF “sticks” of submerged pipe will be transported from the temporary pipeline storage area and attached to the pipeline via a shallow draft tender vessel.

Approximately 1,500 LF of the initial 9,000 LF of pipe required will be prepared at the DMMA site. 1,300 LF of pipe will be fused and placed into position along the uplands from Dixie Highway NE to the northwest corner of the dewatering cell. A final 200 foot segment will be temporarily fused and stored next to the 24-inch dredge inlet pipe casing inside the DMMA parcel.

#### PIPELINE INSTALLATION / CONNECTION

Prior to dredge launch and positioning, the 7,500 LF of floating pipe located at the in-water temporary storage area will be towed into position. Using a tender vessel and specialized pipeline barge with small excavator mounted on it, the first 400 to 500 foot segment of pipe which contains floats every 25 feet will be connected to the dredge discharge end. Subsequent sections of weighted floating pipe will be connected from the dredge to the booster pump located on the uplands at Castaway Point Park. Additional segments of the weighted floating pipe will connect to the booster pump discharge end and will exit the palm bay project limits and continue along the revised offshore pipeline corridor (depths deeper than -5' MLW). If they remain floating during low light conditions, they will be lighted as per the requirements of 33 CFR 88.15.

At the end of the offshore pipeline corridor, two (2) temporary pilings will be installed at approximate pipeline coordinate PLC-6. The pilings will be 15 to 20 feet in length depending on existing depth, made of timber and 8 inches in diameter. These offshore pilings will be jetted in with a small pump and have amber lights secured on top which automatically flash during low-light hours. The lighting will be in accordance with 33 CFR 88.15. The pilings will be approximately 10' apart and the pipeline will extend through the two pilings through the seagrass pipe corridor from PLC-6 to PLC-9. Additional details on how the seagrasses in this area are to be protected can be found in the **Seagrass Protection Plan**.

The 200 LF piece of staged pipe will be pushed through the Dixie Highway - 24" under-road crossing to extend out to the Indian River Lagoon and meet with the pipe awaiting connection at PLC-9. An excavator located inside the DMMA parcel at the west end of the pipeline crossing casing will push the final 200 foot segment of pipe through the casing. Once the pipe is passed through the casing, the final two connections will be made. An angle bend may be installed on the east side of the highway crossing to facilitate the drop in elevation between the casing invert to the water. The pipeline will run along the north side of the DMMA property and traverse up the dike. It will have to cross the roadway at the top of the dike near the NW corner of the DMMA. The pipeline will be buried where it crosses the road, and reinforcement will be placed in the ground above the pipe to allow for vehicles and trucks to pass above.



## PIPELINE SECURING, USE, MARKING AND MAINTENANCE

To ensure the pipeline stays within the designated corridor(s) during dredging operations 250 pound anchors will be placed every 1000 feet and tied to the pipeline. The location of the anchors will be marked by a small yellow buoy.

The floating pipeline behind the dredge will be marked by can buoys every 75 feet and will flash an amber light every 2 seconds during low-light or night-time hours and have a 2 mile illumination radius. The lights have a light sensor and will automatically turn on and off. The lighting will be in accordance with 33 CFR 88.15. The cans will read "Dredge Pipeline".

Offshore corridor section – 3 and the booster pump pipe entrance/exit area will also be marked by lighted can buoys as shown in **Figure A**. The temporary pipeline storage area will also be marked with can buoys.

All the features of the pipeline system will be monitored and inspected daily by tender vessel operators to ensure:

- Pipeline is anchored
- Pipeline is not leaking
- Pipeline is within the designated corridor(s)
- Pipeline is lit during low-light or night-time hours
- Pipeline is submerged as designed (or floating behind dredge)
- All buoys, can buoys, PVC stakes, wood piles, signs, anchors, etc. are intact / in position
- The pipeline is not causing a navigation hazard in any way

## PIPELINE REMOVAL

Once in-water dredging operations are complete, the pipeline will be removed in reverse order as to how it was installed. All anchors, temporary pilings, buoys and lights will be removed from the dredge area and the Indian River Lagoon. The in-water pipe will be capped (so it can float) and be towed back to the shoreline area at the staging site for loading and cutting back into 50 foot pieces.


Details of seagrass protection measures for the pipe removal within the seagrass corridor can be found in the **Seagrass Protection Plan**.

Estimated Schedule: Begin work 2-1-16  
Complete work 6-1-16.






**PROJECT LOCATION MAP:**

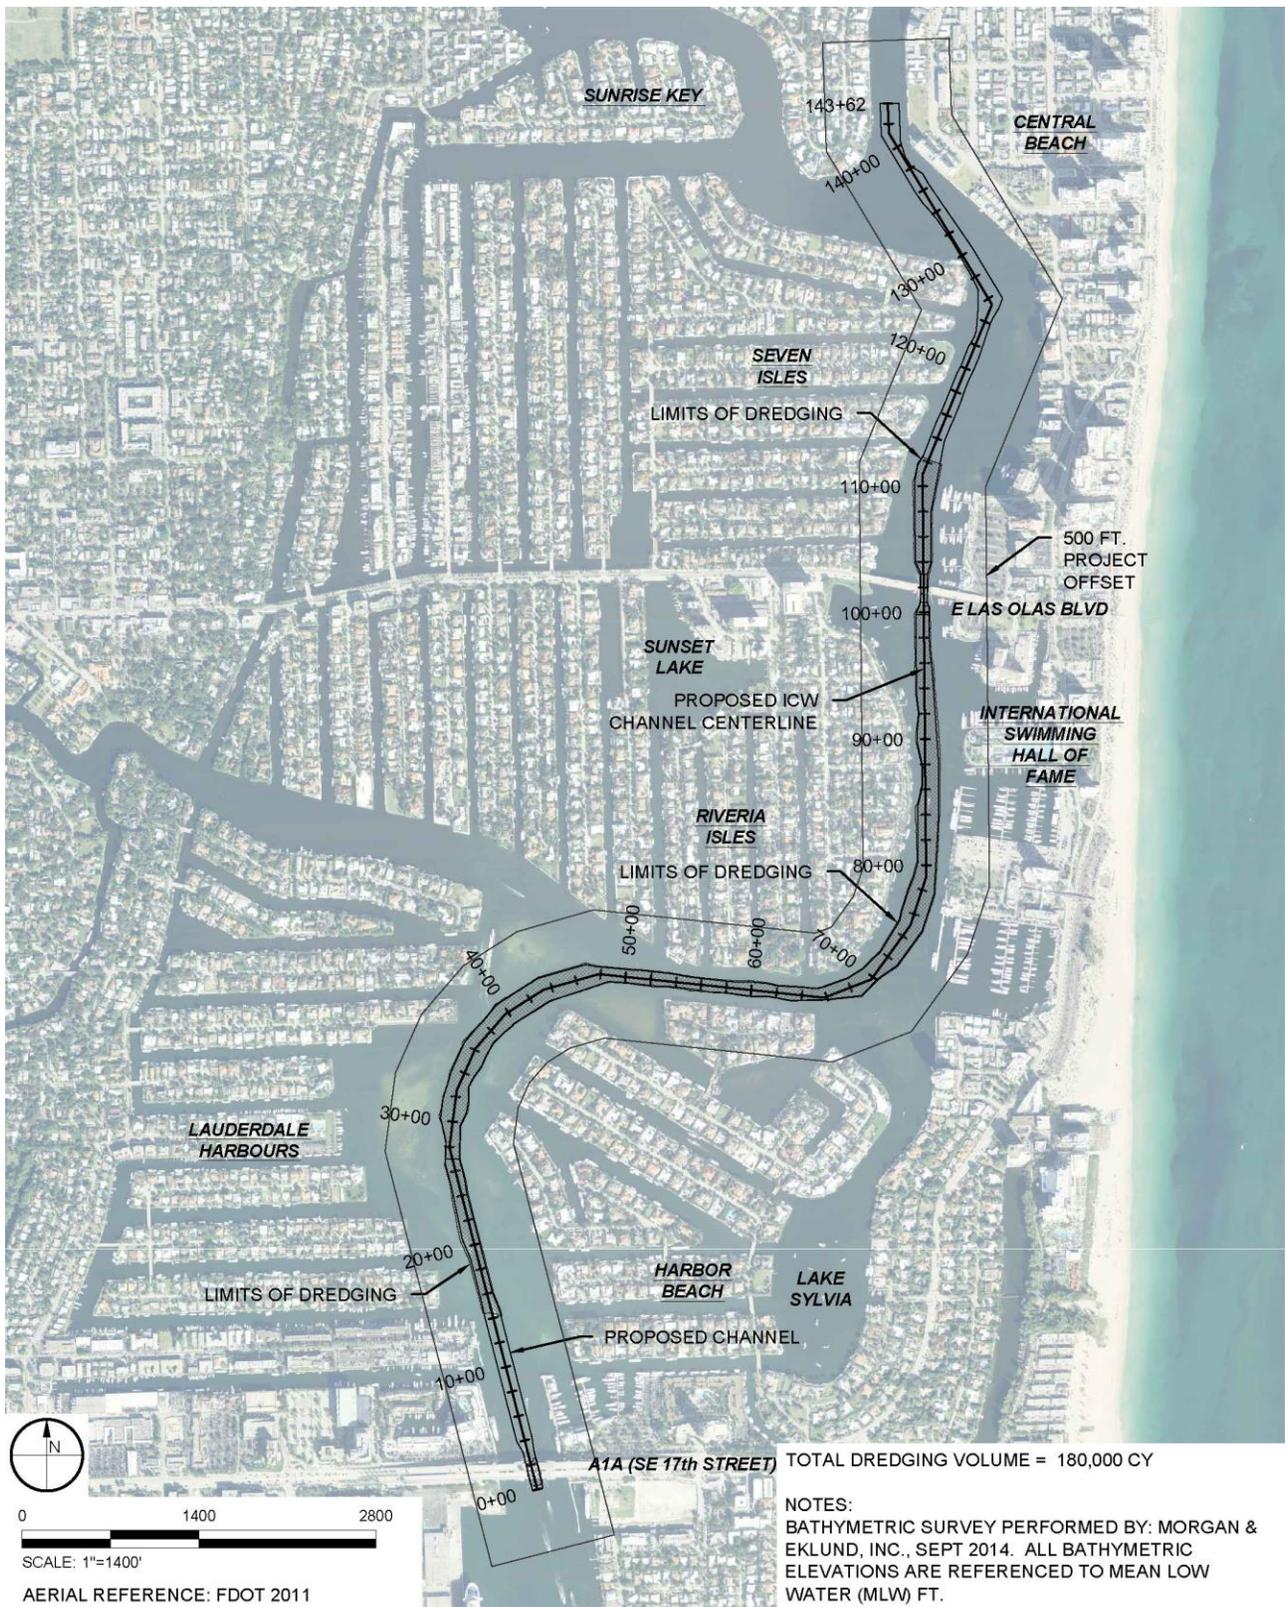



**Figure 2.** Broward County IWW deepening project overview



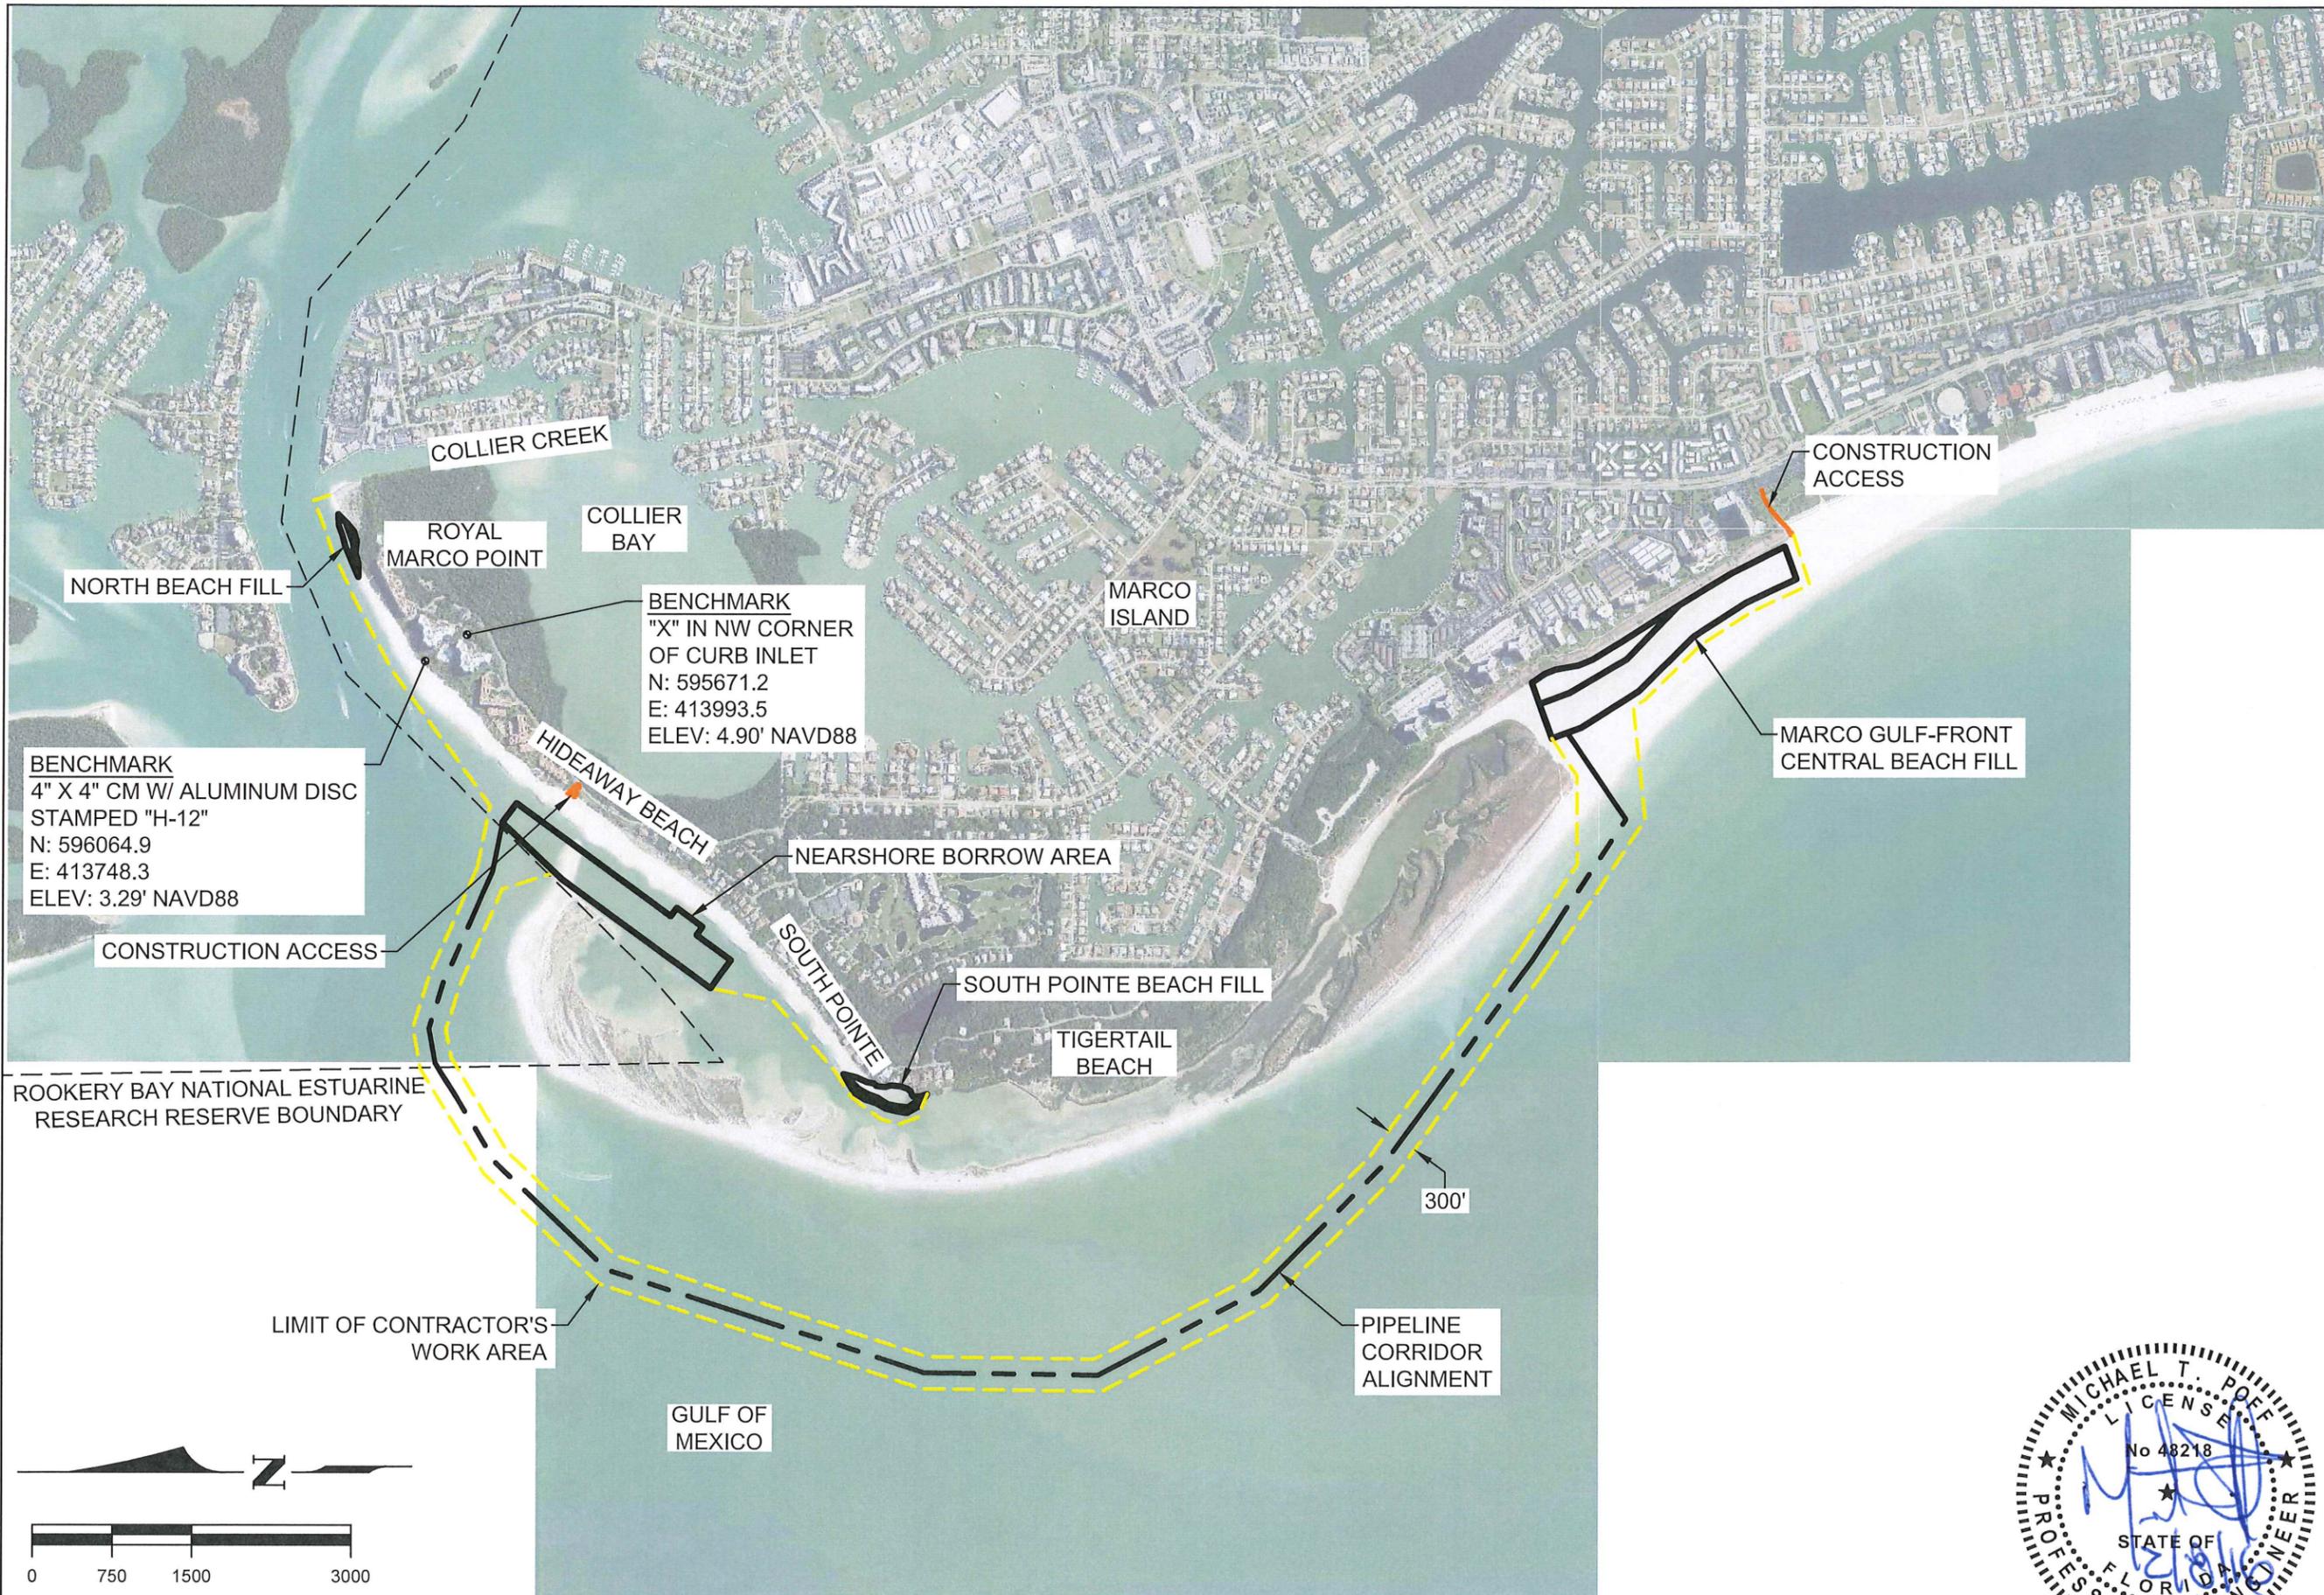

DATE: 1/21/2016		SCALE: AS NOTED	
DRAWN: SDB	F.B.	DATE: 1/21/2016	SCALE: AS NOTED
CHECKED: MTP	PG.	DATE: 1/21/2016	SCALE: AS NOTED
SEC.	TWP.	DATE: 1/21/2016	SCALE: AS NOTED
ACAD NO.	16020-C.dwg	DATE: 1/21/2016	SCALE: AS NOTED
REF. NO.	16,020	DATE: 1/21/2016	SCALE: AS NOTED
CITY OF MARCO ISLAND		PROJECT SITE PLAN	
CLIENT: CIVIL ENGINEERING SURVEY & MAPPING COASTAL ENGINEERING ENVIRONMENTAL PLANNING SERVICES		TITLE: PROJECT SITE PLAN	
PHONE: (239)643-2324		FAX: (239)643-1143	
WWW.COASTALENGINEERING.COM		E-MAIL: INFO@CECIFI.COM	
COASTAL ENGINEERING CONSULTANTS INC. A CECI GROUP COMPANY		Serving Florida Since 1977	
3106 SOUTH HORSESHOE DRIVE		NAPLES, FLORIDA 34104	
SHEET 2		FILE NO: 16020-C-2	




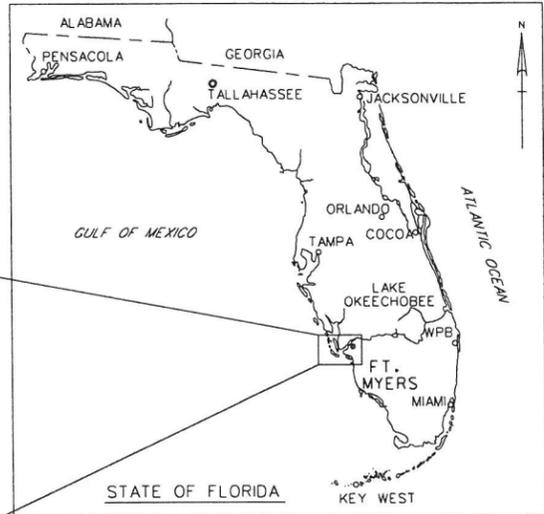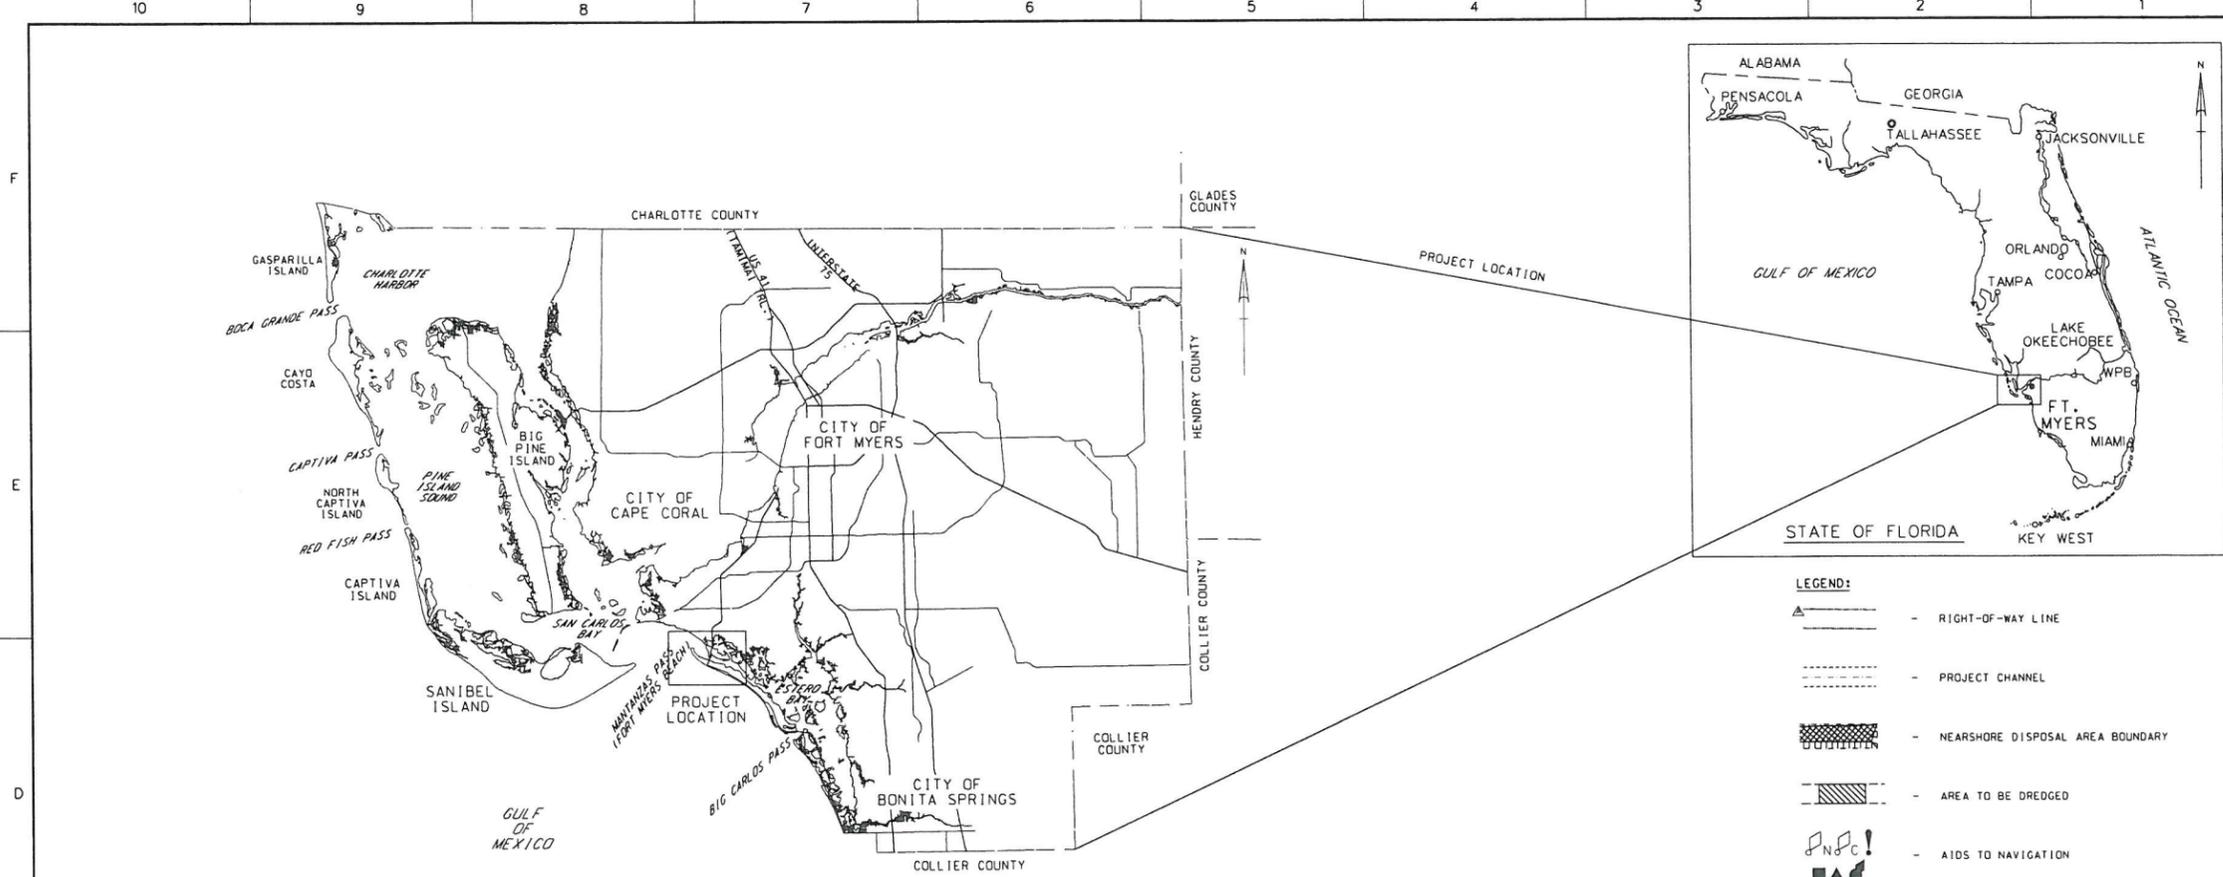

- LEGEND:**
- RIGHT-OF-WAY LINE
  - PROJECT CHANNEL
  - NEARSHORE DISPOSAL AREA BOUNDARY
  - AREA TO BE DREDGED
  - AIDS TO NAVIGATION
  - 12.5 - ELEVATION AND LOCATION
  - CORE BORING DESIGNATION AND LOCATION
  - SEAGRASS
  - CONSTRUCTION ACCESS
  - STAGING AREA
  - CLEARING AND GRUBBING AREA

- ABBREVIATIONS:**
- DWG. = DRAWING
  - CON. = CONCRETE
  - ELEV. = ELEVATION
  - MHW. = MEAN HIGH WATER
  - MLW. = MEAN LOW WATER
  - MLLW. = MEAN LOWER LOW WATER
  - NO. = NUMBER
  - RGE. = RANGE
  - STA. = STATIONING
  - TYP. = TYPICAL
  - USACE = UNITED STATES ARMY CORPS OF ENGINEERS
  - USCG = UNITED STATES COAST GUARD

- NOTES:**
1. REFER TO THIS DWG. FOR LOCATION MAP, GENERAL NOTES, AND LEGEND.
  2. SEE DWG. NO. G-003 FOR CHANNEL CONTROL DATA.
  3. SEE DWG. NO. C-101 FOR CHANNEL SURVEY NOTES.
  4. SEE DWG. NO. C-102 FOR NORTHERN TIP SURVEY NOTES.
  5. SEE DWG. NO. C-701 FOR NEARSHORE DISPOSAL AREA SURVEY NOTES.
  6. ALL PLANIMETRIC LAND FEATURES DEPICTED ON THESE PLANS ARE FOR INFORMATION ONLY AND WERE NOT PHYSICALLY LOCATED BY SURVEY UNLESS OTHERWISE INDICATED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE LOCATION OF ALL SUCH FEATURES THAT HE/SHE DETERMINES ARE NECESSARY FOR OR AFFECT THE PERFORMANCE OF CONSTRUCTION OF THIS PROJECT.

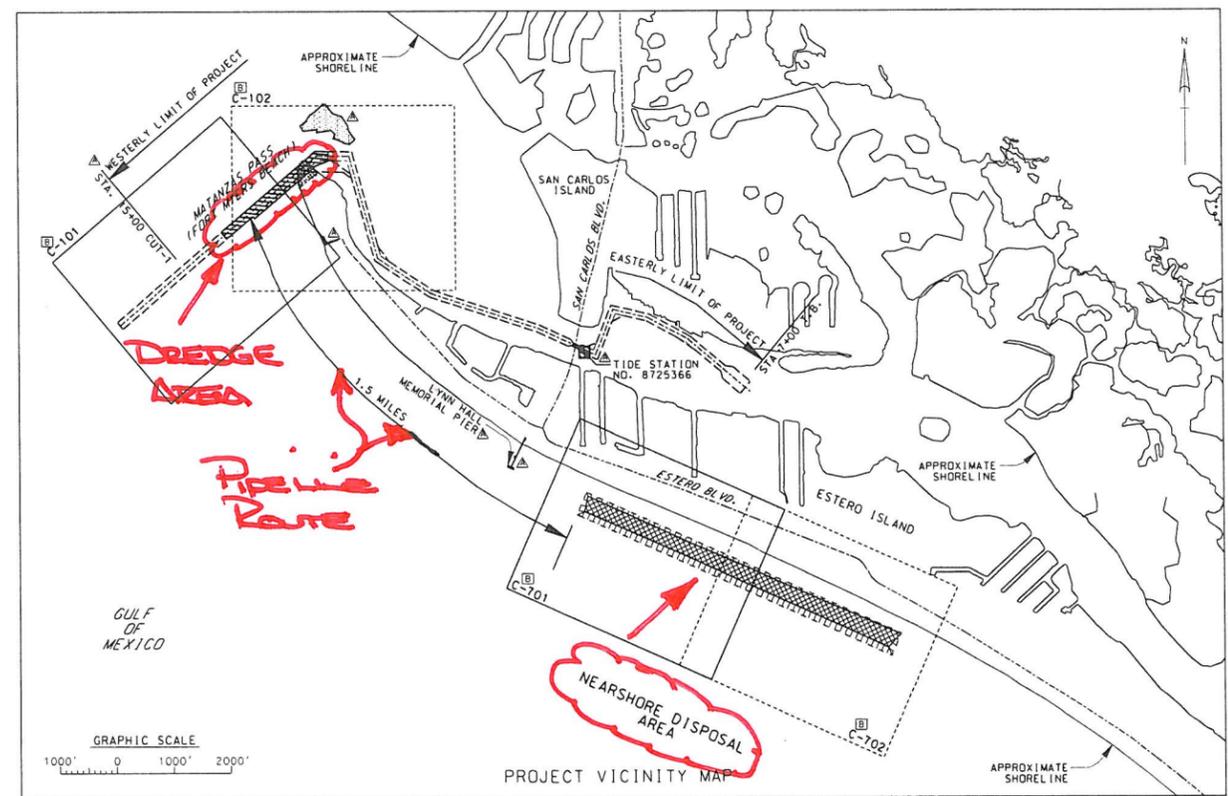

STATION TO STATION	REQUIRED DEPTH (CY)	ALLOWABLE OVERDEPTH (CY)	TOTAL CUBIC YARDS
▲ CUT-1 STA 24+00 TO STA 45+28.96	▲ 166,500	▲ 44,000	▲ 210,500
▲ CUT-2A STA 0+00 TO STA 2+00	▲ 11,500	▲ 3,000	▲ 14,500
▲ TOTAL	178,000	47,000	225,000

US Army Corps of Engineers  
Jacksonville District  
SAFETY ON THIS JOB DEPENDS ON YOU

DEPARTMENT OF THE ARMY  
JACKSONVILLE DISTRICT, CORPS OF ENGINEERS  
JACKSONVILLE, FLORIDA


Scale: AS SHOWN

Drawing no. **G-002**

STATE OF FLORIDA  
LEE COUNTY

BAY

PROJECT LIMITS

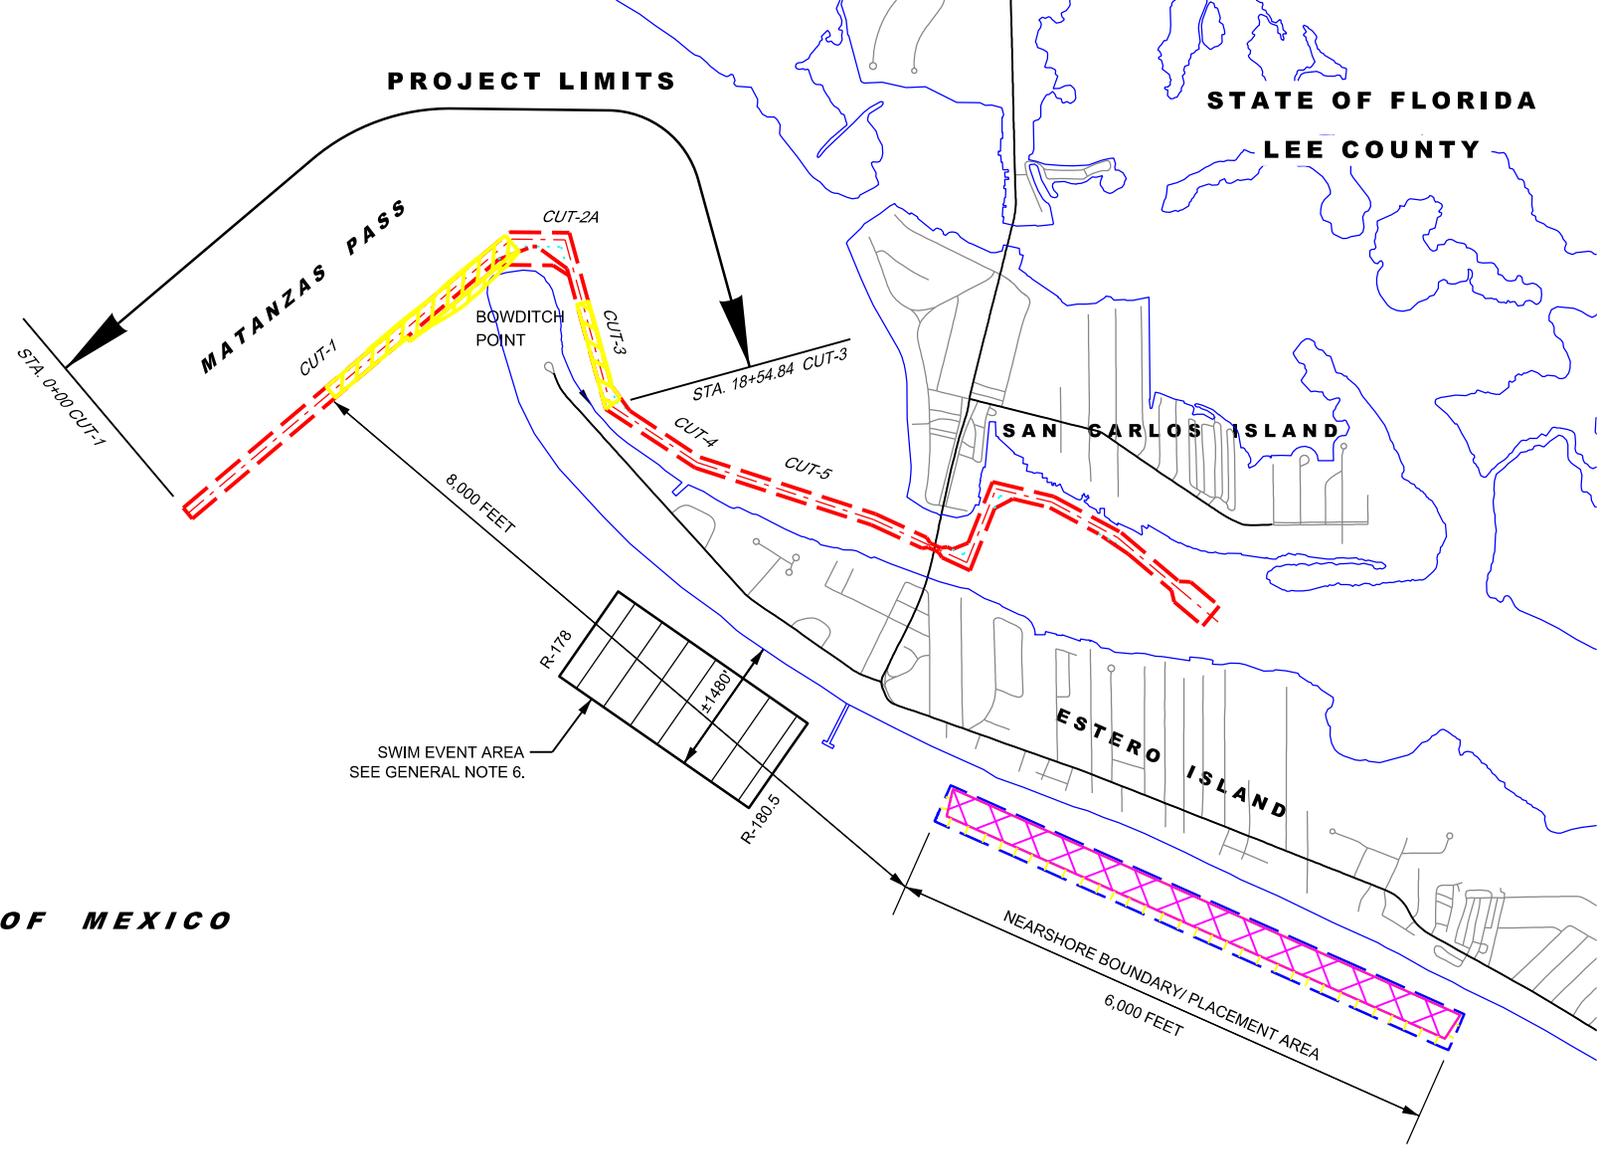

GULF OF MEXICO



**VICINITY MAP**

GRAPHIC SCALE





APOLLO BEACH WATERWAY IMPROVEMENT GROUP (A.B.W.I.G.)  
CHANNEL DREDGING PROJECT

**NAVIGATION CONTROL PLAN – SOUTH & MAIN CHANNEL**

Updated 6-13-2016

**INTRODUCTION**

Gator Dredging plans to temporarily deploy a 14" hydraulic dredge in the South & Main Channel project areas including 15,000 LF of 14 inch inside diameter (16" O.D.) HDPE submerged pipe which will transport dredged material to the dredge material management area. The dredging is proposed to a depth of -7.0-ft MLW with a maximum over-dredge allowance of 0.5 feet. Two (2) booster pumps may be necessary in order to achieve the maximum pumping distance which are proposed on upland vacant lots located at:

- 1.) 6502 Surfside Blvd., Apollo Beach, FL 33572
- 2.) 6114 Marbella Blvd., Apollo Beach, FL 33572

Before any work is performed, pre-work videos of the upland and shorelines along and adjacent to the area will be collected to record existing conditions.

Gator Dredging proposes to submerge all pipeline shown in attached **Figure 1** except for 500 LF directly behind the dredge to allow for dredge maneuverability which will be properly marked with buoys as discussed later in this text. **Plan Sheet 0** has an overview map of the entire project, **Plan Sheet 2** has an overview of the South & Main Channel dredging limits. They are attached to this document for reference.

The work is estimated to begin on June 20<sup>th</sup>, 2016 and end on July 31<sup>st</sup>, 2016.

**PIPELINE INSTALLATION / CONNECTION**

Prior to dredge launch and positioning, the ~10,000 LF of weighted floating pipe will be towed into position to begin operations at the bay side of the Main Channel working inland. Using a tender vessel and specialized pipeline barge with small excavator mounted on it, the first 400 to 500 foot segment of pipe which contains floats every 25 feet will be connected to the dredge discharge end. The pipeline will become submerged upon dredge adding water to the system. Additional segments of the pipe will be added as the dredge progresses away from the dredge material management area until the work is complete. There will be a small 500 LF segment of pipe directly behind the dredge which will float at all times for dredge maneuverability.



### PIPELINE SECURING, USE, MARKING AND MAINTENANCE

The floating pipeline directly behind the dredge will be marked by yellow can buoys every 50 to 75 feet and will flash an amber light every 2 seconds during low-light or night-time hours and have a 2 mile illumination radius. The lights have a light sensor and will automatically turn on and off. The cans will read "Dredge Pipeline".

If necessary to aid with securing the submerged pipeline within the channel / dredge area during dredging operations, 250 pound anchors will be placed every 500 feet and tied to the pipeline. The location of the anchors will be marked by a 12" yellow buoy and it is estimated ~30 anchors may be used along the offshore pipeline corridor.

All the features of the pipeline system will be monitored and inspected daily by tender vessel operators to ensure:

- Pipeline is anchored and within designated channel / dredge area
- Pipeline is not leaking
- Pipeline is lit during low-light or night-time hours
- Pipeline is submerged as designed (only floating ~500' behind dredge)
- All buoys, can buoys, signs, anchors, etc. are intact / in position
- The pipeline is not causing a navigation hazard in any way

### MARINE MAMMAL PROTECTION


All in-water operations, including vessels, shall be shutdown if a marine mammal comes within 50 feet of the operation. Activities shall not resume until the animal(s) has moved beyond the 50 foot radius of the operation, or until 30 minutes elapses if the animal(s) has not reappeared within 50 feet of the operation.

Any collision with or injury to a marine mammal will be reported immediately to FWC Hotline at 1-888-404-3922 and to [ImperiledSpecies@myFWC.com](mailto:ImperiledSpecies@myFWC.com) and to FWS in Jacksonville at 1-904-731-3336.

### PIPELINE REMOVAL


Once in-water dredging operations are complete; the dredge, pipeline, signs, anchors and work vessels will be towed from the dredge areas back to the DMMA site or nearby marina for final removal from the project area.

FIGURE 1: PROPOSED PIPELINE ROUTE (APPROX.)

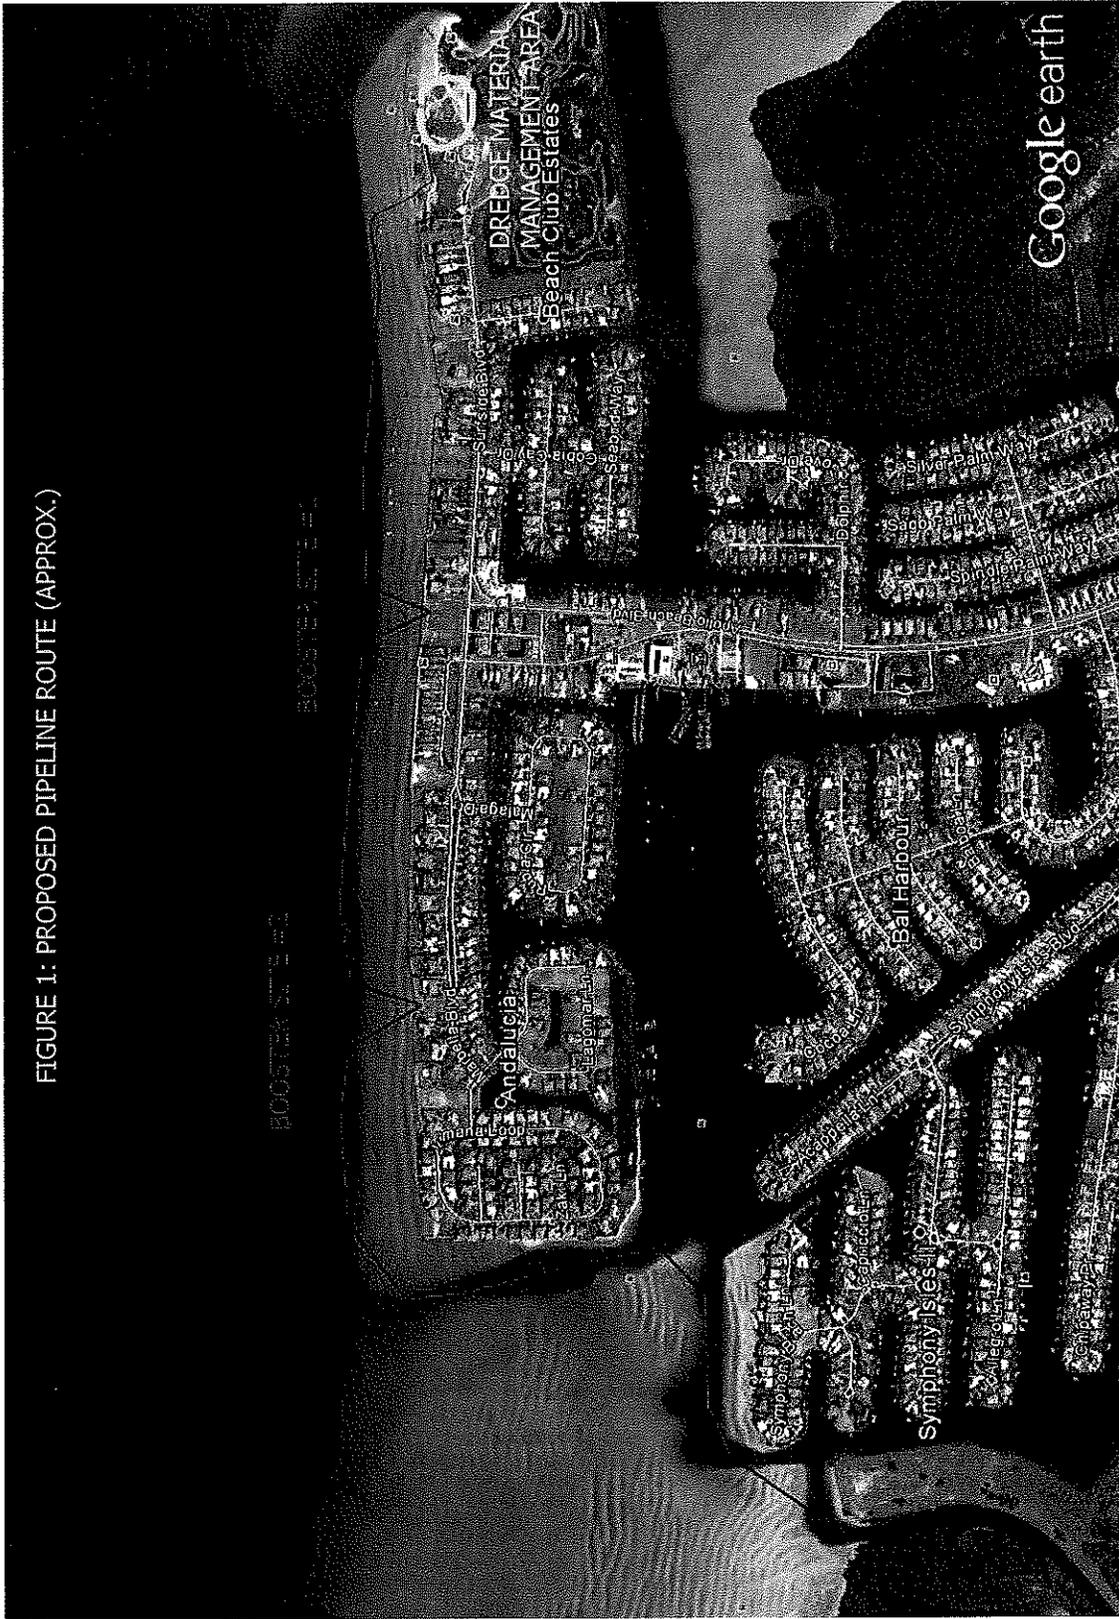

Google earth miles 1 km 3

encl -

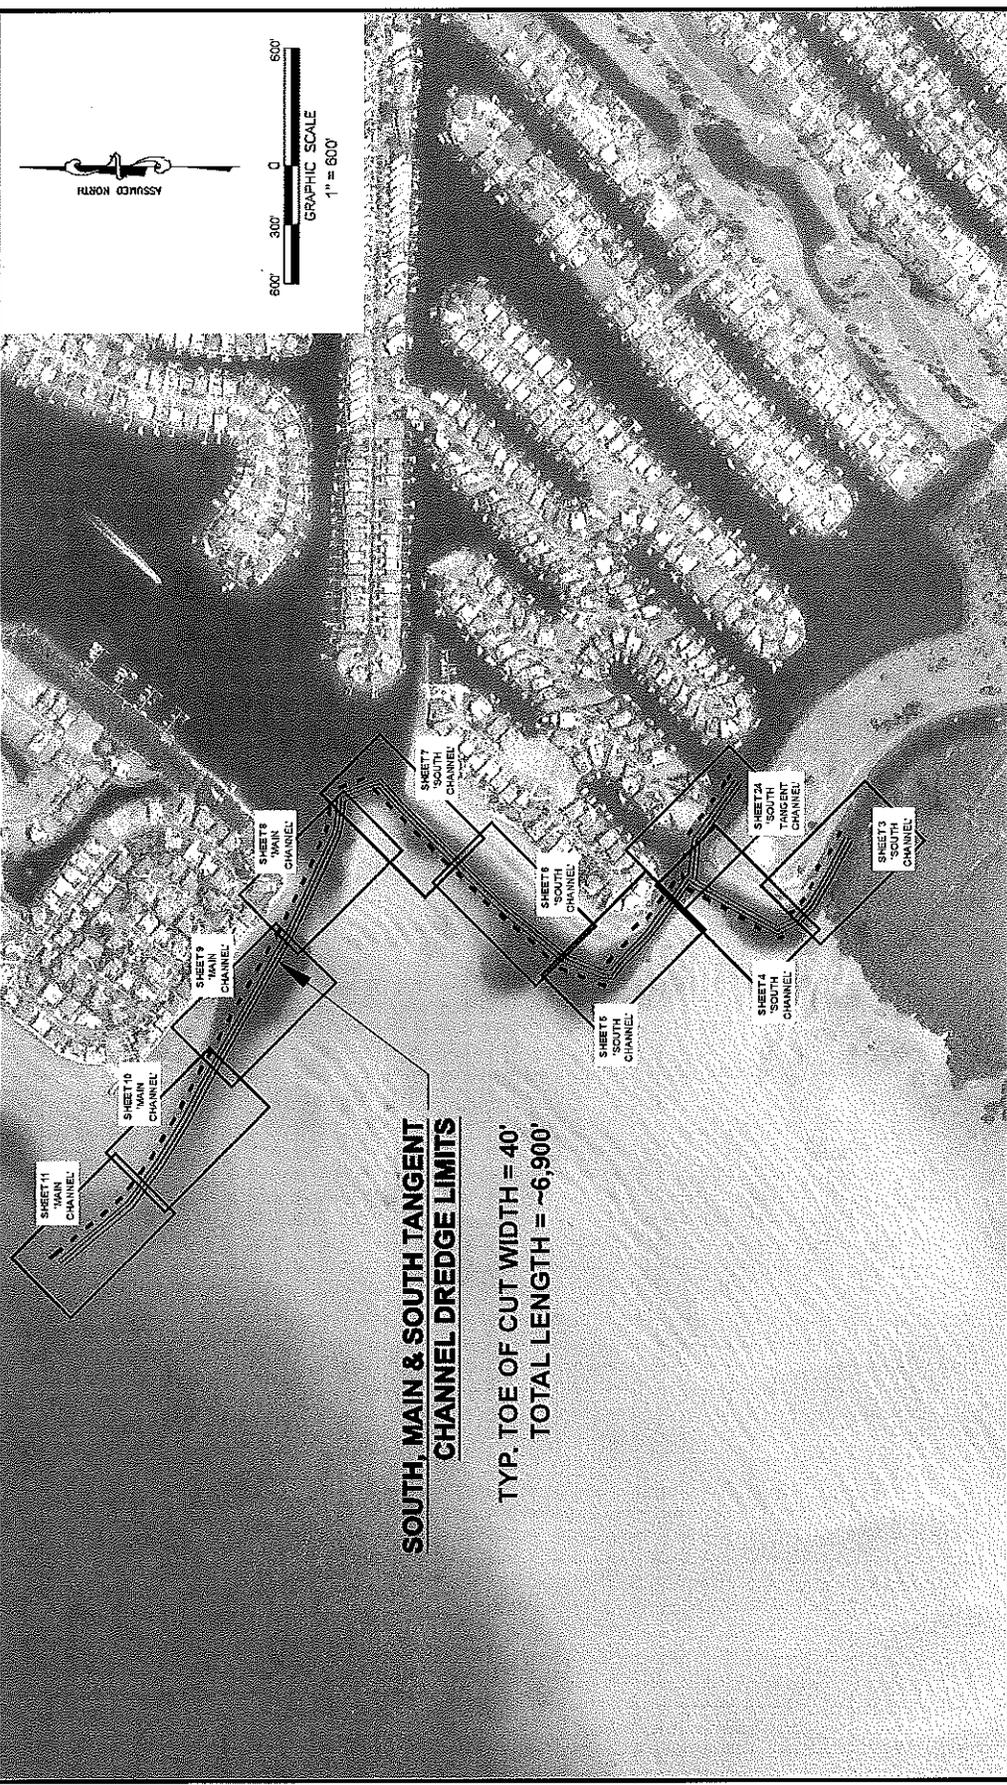


**SOUTH, MAIN & SOUTH TANGENT CHANNEL DREDGE LIMITS**

TYP. TOE OF CUT WIDTH = 40'  
TOTAL LENGTH = ~6,900'

<b>PREPARED FOR:</b> Hillsborough County, FL  <b>OVERVIEW: SOUTH, MAIN &amp; SOUTH TANGENT CHANNELS</b>	DATE: 04/13/2016 DRAWN BY: KCD & TBM CHECKED BY: TBM JOB NO.:	REVISIONS:	<b>SHEET 02</b>
	TYLER B. MCDONALD, P.E. P.L.C.E. NO. 7869 P.L.C.E. DATED: 04-13-2016 NO. 31849	GATOR DREDGING CERT. OF AUTH. NO. 31849	
<b>WATERFRONT PROPERTY SERVICES, LLC</b> dba GATOR DREDGING 10800 50TH WAY NORTH CLEARWATER, FL 33760 PHONE 727.527.1300 FAX 727.527.1300 www.gatordredging.com	NEW ELEVATION: +0.30 FT NAVD83 NEW ELEVATION: -1.22 FT NAVD83 DREDGE DEPTH: -2.0 FT MLW -2.0 FT MLW (OTHER ALLOWANCES)		
<b>GATOR DREDGING</b>			

SCALE: 1" = 600'

FINAL PERMIT PLANS FOR:  
**APOLLO BEACH WATERWAY  
 IMPROVEMENT GROUP  
 (A.B.W.I.G.)**  
**CHANNEL DREDGING PROJECT**  
 LOCATED IN APOLLO BEACH  
 HILLSBOROUGH COUNTY, FLORIDA

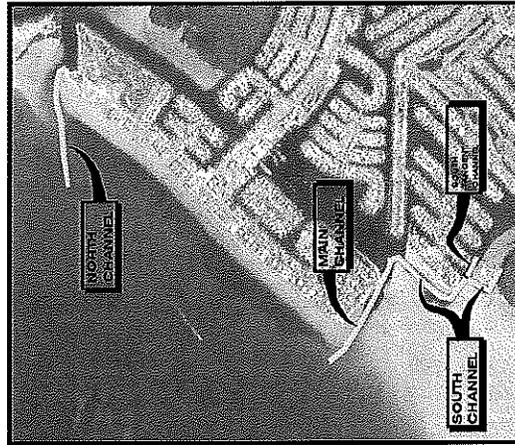

**AERIAL VICINITY MAP**  
 SCALE: N.T.S.

DRAWING INDEX	
SHEET NO.	SHEET TITLE
0	COVER SHEET & DRAWING INDEX
1	LEGEND & NOTES
2	OVERVIEW: SOUTH, MAIN & SOUTH TANGENT CHANNELS
3	PLAN VIEW: SOUTH CHANNEL - STA. 0+00 TO 8+00
4	PLAN VIEW: SOUTH CHANNEL - STA. 8+00 TO 12+00
5	PLAN VIEW: SOUTH CHANNEL - STA. 12+00 TO 20+00
6	PLAN VIEW: SOUTH CHANNEL - STA. 20+00 TO 27+50
7	PLAN VIEW: SOUTH CHANNEL - STA. 27+50 TO 28+00
8	PLAN VIEW: MAIN CHANNEL - STA. 0+00 TO 48+00
9	PLAN VIEW: MAIN CHANNEL - STA. 48+00 TO 50+00
10	PLAN VIEW: MAIN CHANNEL - STA. 50+00 TO 57+50
11	PLAN VIEW: MAIN CHANNEL - STA. 57+50 TO 65+50
12	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 0+00 TO 4+00
13	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 5+00 TO 9+00
14	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 10+00 TO 15+00
15	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 16+00 TO 21+00
16	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 22+00 TO 27+00
17	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 28+00 TO 35+00
18	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 35+00 TO 37+00
19	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 39+00 TO 44+00
20	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 45+00 TO 50+00
21	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 51+00 TO 56+00
22	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 57+00 TO 62+00
23	SECTION VIEWS: SOUTH & MAIN CHANNEL - STA. 63+00
24	PLAN VIEW: SOUTH TANGENT CHANNEL
25	SECTION VIEWS: SOUTH TANGENT CHANNEL - STA. 0+00 TO 4+00
26	OVERVIEW: NORTH CHANNEL
27	PLAN VIEW: NORTH CHANNEL - STA. 0+00 TO 4+00
28	PLAN VIEW: NORTH CHANNEL - STA. 4+00 TO 10+00
29	PLAN VIEW: NORTH CHANNEL - STA. 10+00 TO 17+00
30	PLAN VIEW: NORTH CHANNEL - STA. 17+00 TO 23+50
31	PLAN VIEW: NORTH CHANNEL - STA. 23+50 TO 28+00
32	SECTION VIEWS: NORTH CHANNEL - STA. 0+00 TO 5+00
33	SECTION VIEWS: NORTH CHANNEL - STA. 5+00 TO 11+00
34	SECTION VIEWS: NORTH CHANNEL - STA. 12+00 TO 17+00
35	SECTION VIEWS: NORTH CHANNEL - STA. 18+00 TO 23+00
36	SECTION VIEWS: NORTH CHANNEL - STA. 24+00 TO 28+00
37	PROJECT VOLUME SUMMARY

**APRIL 13, 2016 SUBMITTAL**

<p>WATERFRONT PROPERTY SERVICES, LLC          c/o GATOR DREDGING          13850 85TH WAY NORTH          CLEARWATER, FL 33760          PHONE 727.527.1300 FAX 727.227.1300          www.gatordredging.com</p>	MWL ELEVATION +0.50 FT NAVD83 MLLW ELEVATION -1.22 FT NAVD83 DREDGE DEPTH -2.0 FT MLLW (OVER ALLOWANCE) -2.3 FT MLLW (OVER ALLOWANCE)	DATE: 04/13/2016 DRAWN BY: MCD & TBM CHECKED BY: TBM JOB NO.:	REVISIONS:	PREPARED FOR: Hillsborough County, FL COVER SHEET & SHEET INDEX	TYLER B. MCCOUGAL, P.E. FL REG. NO. 78269 PLS. DATED: 06-03-2015 GATOR DREDGING CERT. OF AUTH. 001 01248	SHEET 00	SCALE: N/A
	WATERPROOF PROPERTY SERVICES, LLC c/o GATOR DREDGING 13850 85TH WAY NORTH CLEARWATER, FL 33760 PHONE 727.527.1300 FAX 727.227.1300 www.gatordredging.com	APRIL 13, 2016 SUBMITTAL	SHEET 00	SCALE: N/A			

**GENERAL LEGEND:**



INFORMATIONAL SIGN



RED CHANNEL MARKER (MARKS THE LEFT SIDE OF THE CHANNEL LEAVING A HARBOR)




GREEN CHANNEL MARKER (MARKS THE RIGHT SIDE OF THE CHANNEL LEAVING A HARBOR)



SEDIMENT ELEVATION CONTOURS IN RELATION TO MEAN LOW WATER (MLW) - SEE CONTOUR LEGEND

**CONTOUR ELEVATION LEGEND:**

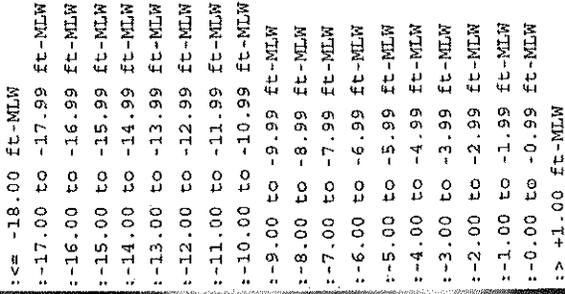

**NOTES:**

- 1.) FIELD ELEVATION DATA WAS COLLECTED ON 03/24/2016 TO 03/26/2016 AND REPRESENTS CONDITIONS ONLY FOR THE DATE OF FIELD COLLECTION.
- 2.) NO UNDERGROUND UTILITIES SHOWN OR LOCATED FOR THE PURPOSES OF THESE PERMIT PLANS. CONTRACTOR/OWNER RESPONSIBLE FOR LOCATING ALL UTILITIES AND UNDERGROUND IMPROVEMENTS.
- 3.) ALL ELEVATION DATA AND CONTOURS SHOWN IN FEET AND RELATIVE TO MLW.
- 4.) MLW = -1.22 FT NAVD88 PER DEP TIDE STATION NO. 872-6537, NAMED APOLLO BEACH - HILLSBOROUGH BAY, REPORT DATED 06-02-2010, TIDAL EPOCH 1985-2011.
- 5.) PLANS ARE FOR THE PURPOSES OF PERMITTING ONLY (NOT FOR CONSTRUCTION).
- 6.) AERIAL PHOTOGRAPHY SHOWN OBTAINED FROM LABINS - DATED 2014.

MAW ELEVATION:	-0.50 FT NAVD88
MLW ELEVATION:	-1.22 FT NAVD88
DRENCH DEPTH:	-7.0 FT MLW
	-7.5 FT MLW (OVER ALLOWANCE)

WATERFRONT PROPERTY SERVICES, LLC  
 dba GATOR DREDGING  
 13650 50TH WAY NORTH  
 CLEARWATER, FL 38750  
 PHONE 727.287.1830 FAX 727.287.1838  
 www.gatordredging.com

TYLER B. MCDOUGAL, P.E. GATOR DREDGING  
 FL P.E. NO. 78949 CERT. OF AUTH.  
 PLANS DATED: 04-19-2016 NO. 31548

**PREPARED FOR:**  
 Hillsborough County, FL


**LEGEND & NOTES**

DATE:	04/13/2016
DRAWN BY:	KCD & TBM
CHECKED BY:	TBM
JOB NO.:	

**SHEET 01**

**SCALE: N/A**



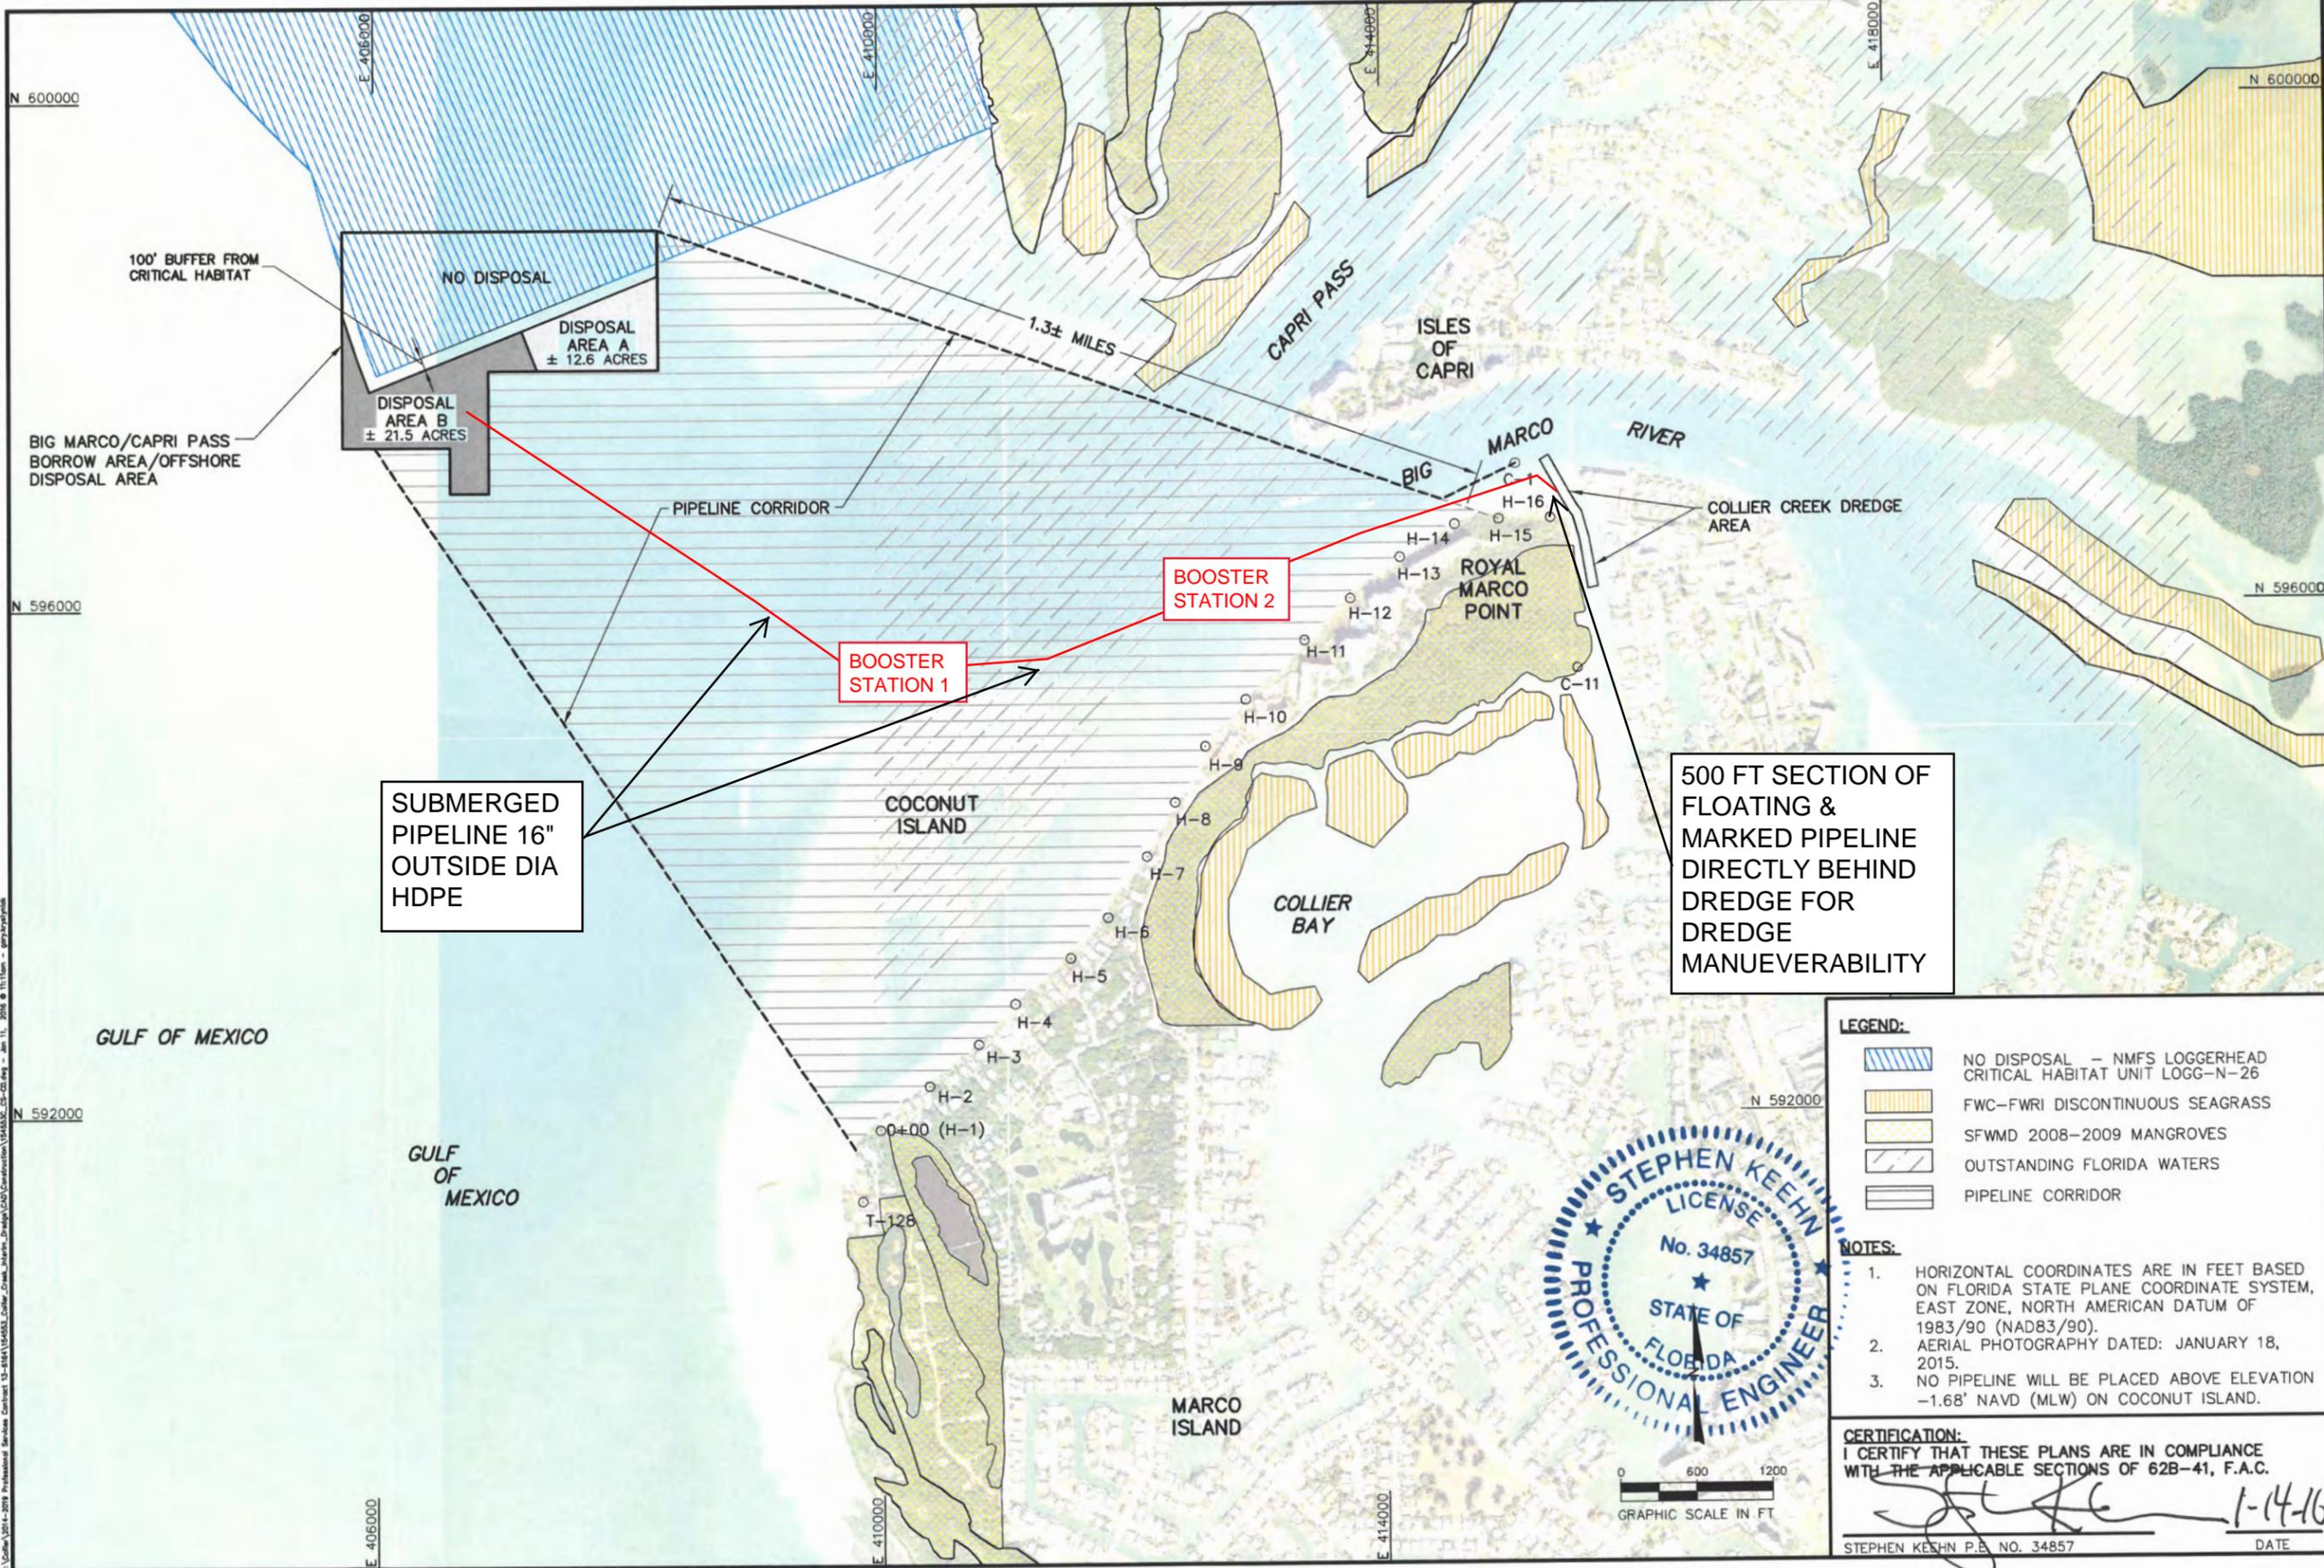

100' BUFFER FROM CRITICAL HABITAT

NO DISPOSAL  
DISPOSAL AREA A ± 12.6 ACRES  
DISPOSAL AREA B ± 21.5 ACRES

BIG MARCO/CAPRI PASS BORROW AREA/OFFSHORE DISPOSAL AREA

PIPELINE CORRIDOR

1.3± MILES

BOOSTER STATION 1

BOOSTER STATION 2

SUBMERGED PIPELINE 16" OUTSIDE DIA HDPE

500 FT SECTION OF FLOATING & MARKED PIPELINE DIRECTLY BEHIND DREDGE FOR DREDGE MANUEVERABILITY

**LEGEND:**

- NO DISPOSAL - NMFS LOGGERHEAD CRITICAL HABITAT UNIT LOGG-N-26
- FWC-FWRI DISCONTINUOUS SEAGRASS
- SFWMD 2008-2009 MANGROVES
- OUTSTANDING FLORIDA WATERS
- PIPELINE CORRIDOR

**NOTES:**

1. HORIZONTAL COORDINATES ARE IN FEET BASED ON FLORIDA STATE PLANE COORDINATE SYSTEM, EAST ZONE, NORTH AMERICAN DATUM OF 1983/90 (NAD83/90).
2. AERIAL PHOTOGRAPHY DATED: JANUARY 18, 2015.
3. NO PIPELINE WILL BE PLACED ABOVE ELEVATION -1.68' NAVD (MLW) ON COCONUT ISLAND.

**CERTIFICATION:**

I CERTIFY THAT THESE PLANS ARE IN COMPLIANCE WITH THE APPLICABLE SECTIONS OF 62B-41, F.A.C.



*[Signature]* 1-14-16  
STEPHEN KEEHN P.E. NO. 34857 DATE

**CB&I COASTAL PLANNING & ENGINEERING, INC.**  
2481 N.W. BOCA RATON BOULEVARD  
BOCA RATON, FLORIDA 33431  
www.CBI.com  
PH: (561) 391-8102  
FAX: (561) 391-9116  
C.O.A. FL #4029  
C.O.A. LA #2531

Reference Files	Designed by	Checked by	Drawn by	Reviewed by	Date	Submitted by	Comm. No.
	AB	AMB	HN	LF	10/20/15	LF	154553
							AS NOTED



COLLIER CREEK PROJECT  
INTERIM DREDGE PROJECT  
CONSTRUCTION PLANS  
COLLIER COUNTY, FLORIDA

DRAWING NO. **OV**  
SHEET 3 OF 9

P:\Collier\2014-2015 Professional Services Contract 13-914\154553\_Collier\_Dredge\CAD\Construction\154553\_Collier\_CD.dwg - Jan 11, 2016 @ 11:10am - gpt3/brj/psk

- NOTES:**
- HORIZONTAL COORDINATES ARE IN FEET BASED ON FLORIDA STATE PLANE COORDINATE SYSTEM, EAST ZONE, NORTH AMERICAN DATUM OF 1983 (NAD83).
  - CONTOURS REPRESENT THE TOPOGRAPHIC AND HYDROGRAPHIC SURVEY PERFORMED BY CB&I DECEMBER 16-18, 2014.
  - AERIAL PHOTOGRAPHY DATED: DECEMBER 19, 2013.
  - AVOID EXCAVATION OF EXISTING STRUCTURE.

- LEGEND:**
- △ DESIGN CHANNEL CROSS SECTION COORDINATE TABLE ID (SEE SHEET 2 FOR TABLE)
  - ② DESIGN CHANNEL BASE COORDINATE ID (SEE SHEET 2 FOR TABLE)
  - DESIGN CHANNEL CROSS SECTION LOCATION
  - FDEP REFERENCE MONUMENTS
  - - - JETTY EASEMENT

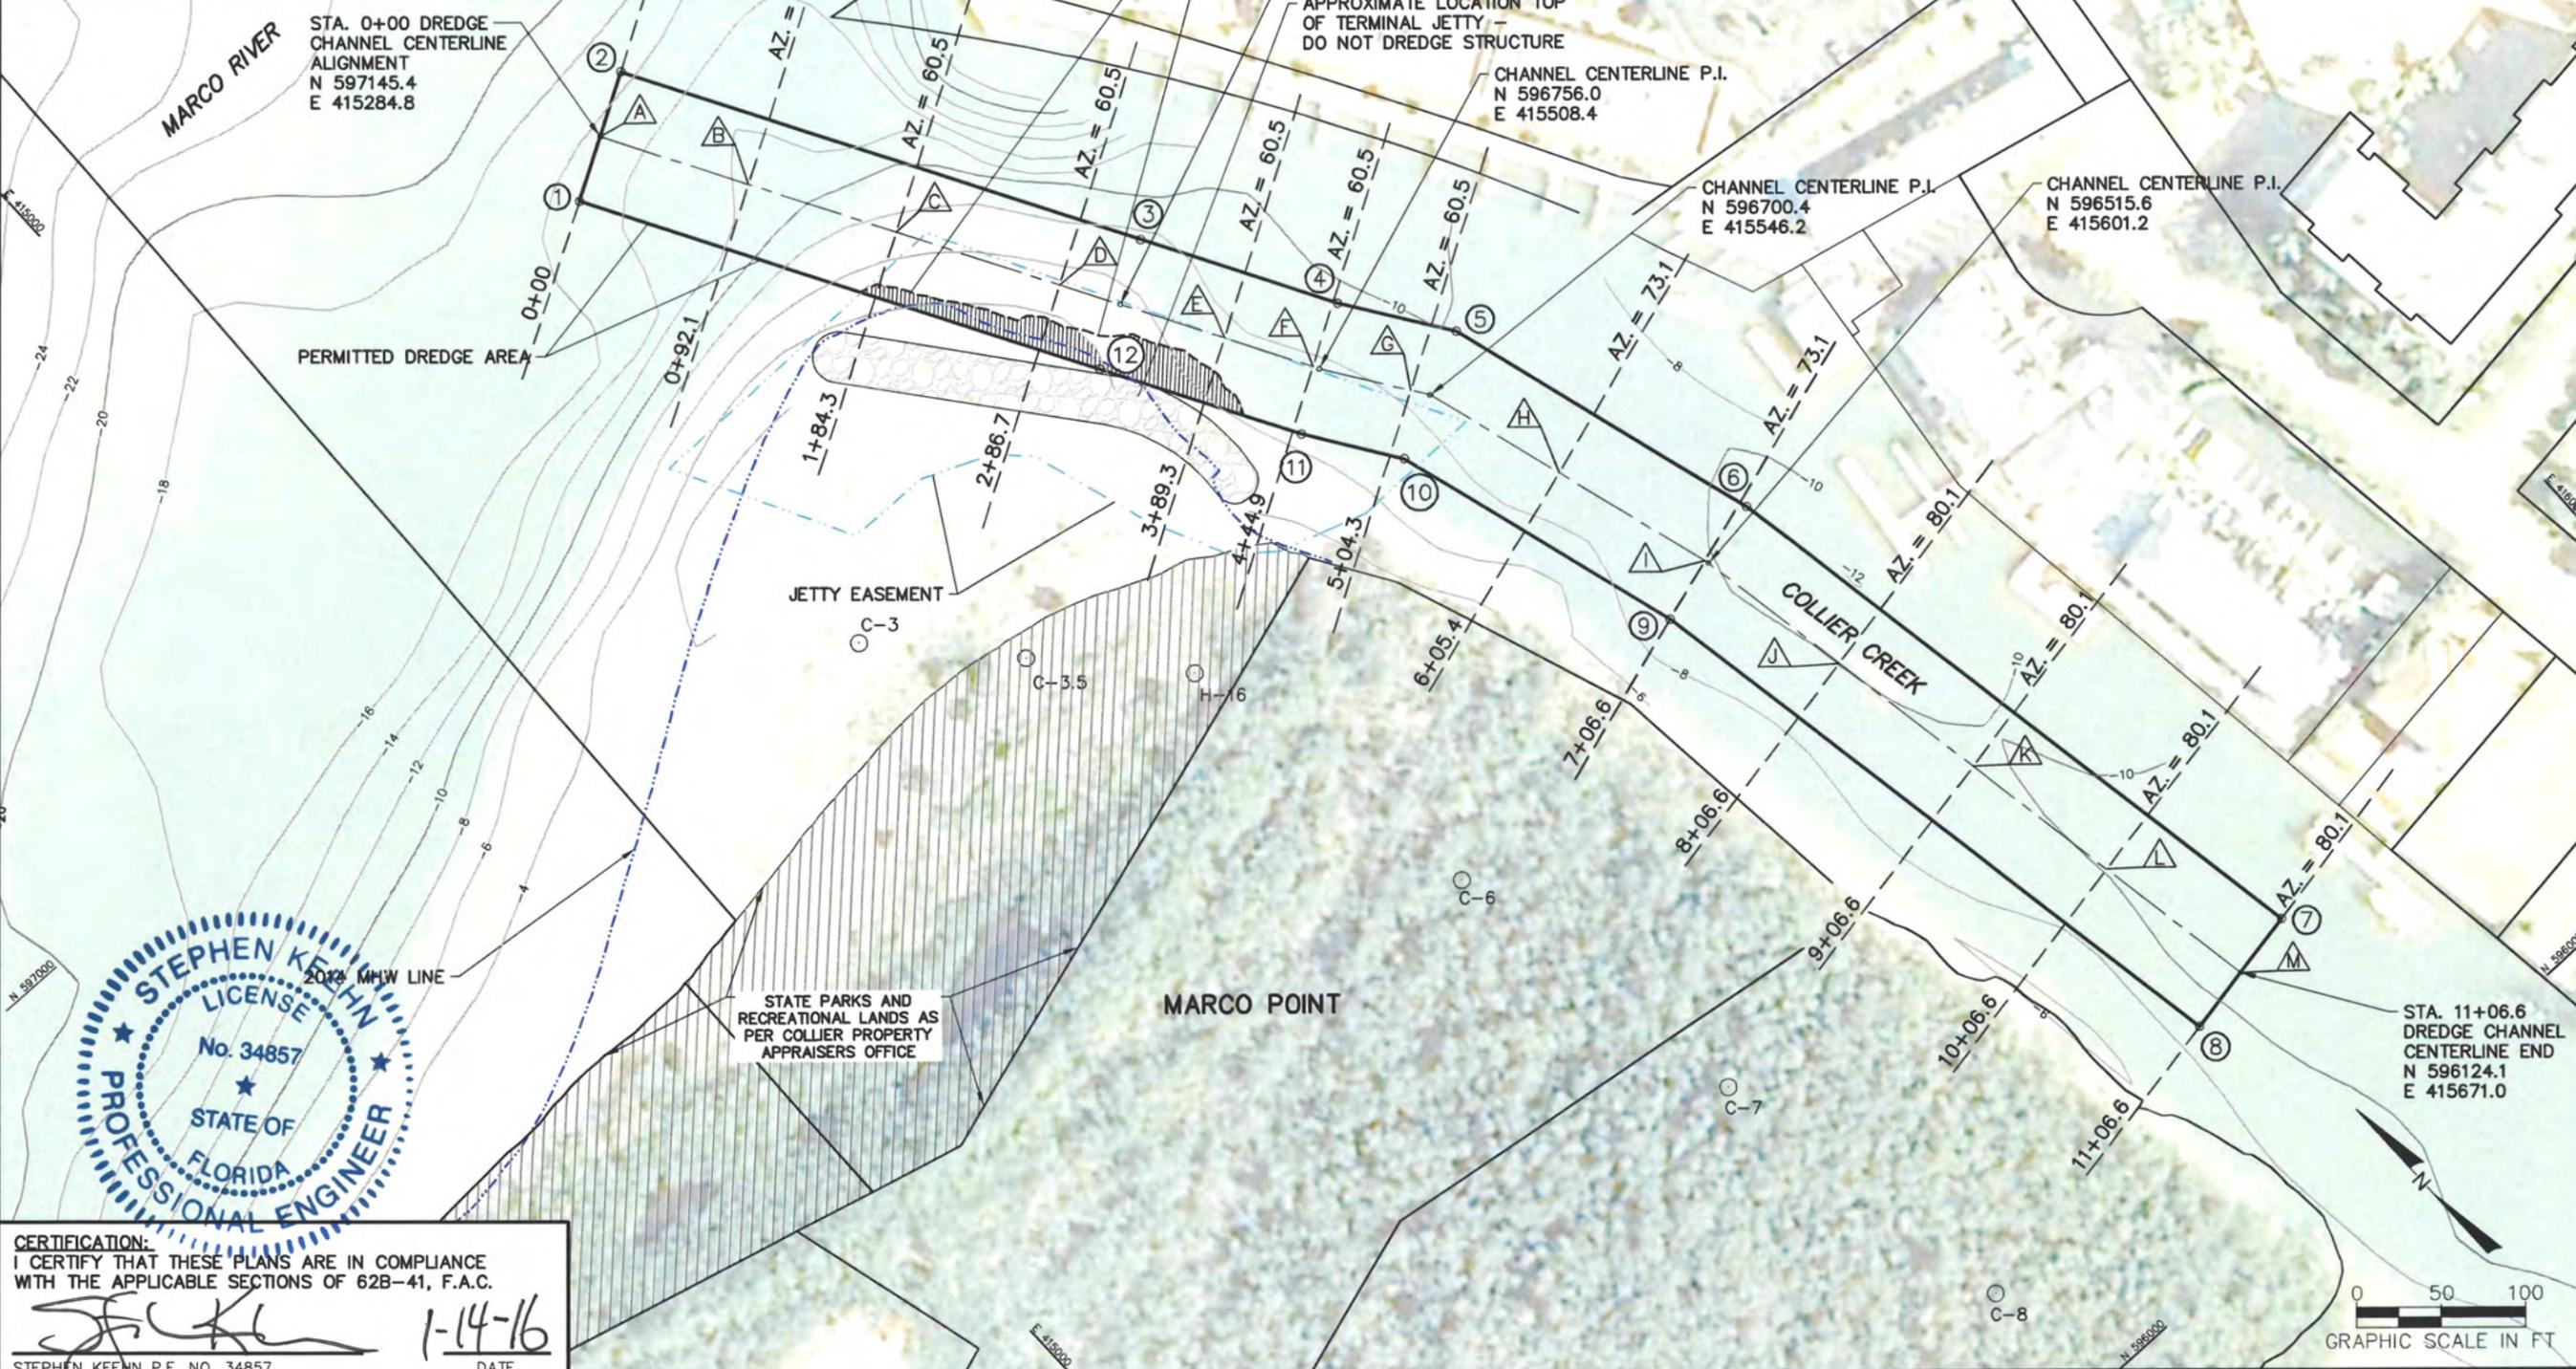

**CERTIFICATION:**  
I CERTIFY THAT THESE PLANS ARE IN COMPLIANCE WITH THE APPLICABLE SECTIONS OF 62B-41, F.A.C.

*[Signature]*  
STEPHEN KEENN P.E. NO. 34857

1-14-16  
DATE

**CB&I COASTAL PLANNING & ENGINEERING, INC.**  
2481 N.W. BOCA RATON BOULEVARD  
BOCA RATON, FLORIDA 33431  
www.CBI.com

PH: (561) 391-9102  
FAX: (561) 391-9116  
C.O.A. FL. #4028  
C.O.A. LA. #2531

REVISIONS	No.	Date	Description

Checked by: AMB	Reviewed by: LF
Designed by: AB	Submitted by: LF
Drawn by: GK	Comm. No.: 154523
Date: 10/20/15	AS NOTED
Plot Scale: AS NOTED	

COLLIER CREEK  
INTERIM DREDGE PROJECT  
CONSTRUCTION PLANS  
COLLIER COUNTY, FLORIDA  
DREDGE DESIGN PLAN VIEW

DRAWING NO.  
**PV-1**

SHEET 4 OF 9

